

Supplies & Accessories

for Chromatography



Vials, Caps & Accessories
Fused Silica Capillary Tubing
PressFit Connector & Splitter
GC Liners, Ferrules & Septa
Filtration (Membrane Filter Discs,
Syringe Filter, Spin Filter, Filter Vials)

Tubing (PEEK, Polymeric & SS)
GC Fittings & Unions
HPLC Fittings & Unions
HPLC Safety Products
Syringes & Accessories
Flash Cartridges & Bulk Material

Contact us

Online

To find 24/7 product information and prices, promotions, news, search tools, catalogs, brochures and much more, visit www.bgb-shop.com.

For general information, technical support, customer service and to place an order:

Switzerland

BGB Analytik AG
Rohrmattstrasse 4
CH-4461 Boeckten
Phone +41 (0)61 991 00 46
Fax +41 (0)61 991 00 25
Email sales@bgb-analytik.com



Germany and EU

BGB Analytik Vertrieb GmbH
Mühlestraße 1
D-79539 Lörrach-Tumringen
Phone +49 (0) 7621 58 842 70
Fax +49 (0) 7621 58 842 89
Email sales.de@bgb-analytik.com

Belgium, Netherlands, Luxembourg

BGB Analytik Benelux B.V.
Drielandendreef 42-44
3845 CA Harderwijk / The Netherlands
Phone +31 (0)341 700 270
Fax +31 (0)341 700 271
Email sales.benelux@bgb-analytik.com

France

BGB Analytik France S.A.S.
81, Vie de l'Etraz
F-01630 Saint Jean de Gonville
Phone 04 50 48 85 67
Fax 04 50 56 23 78
Email sales.fr@bgb-analytik.com

Turkey

BGB Analytik Laboratuvar Malzemeleri Ticaret LTD.ŞTİ
Starport Residence, Yenişehir Mah. Osmanlı Bulvarı
Sümbül Sok. No:10, Daire: 193
34912 Kurtköy, Pendik, İstanbul
Phone +90 (216) 909 20 48
Email sales.tr@bgb-analytik.com


USA

BGB Analytik USA LLC
8407 F Richmond Hwy
Alexandria, VA 22309, USA
Phone +1-703-780-1500
Fax +1-703-991-9131
Email sales.usa@bgb-analytik.com



BGB Downloads
www.bgb-shop.com/downloads

Location and Facility

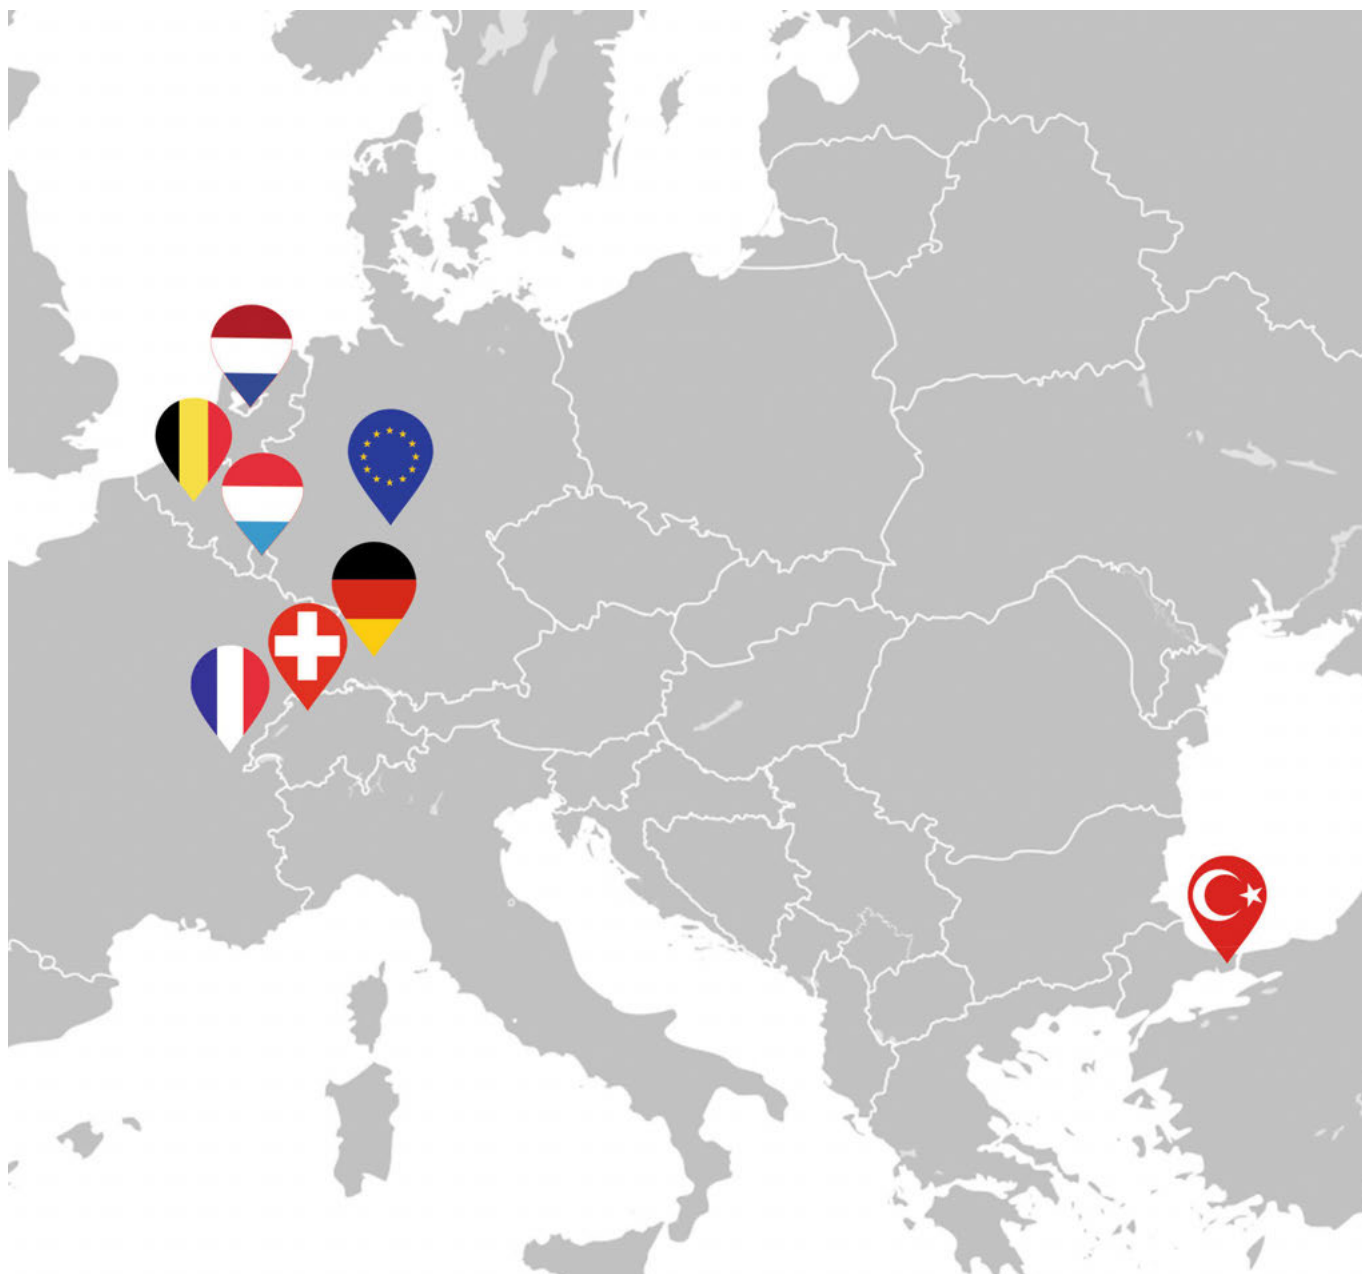

About BGB Analytik

The beginnings of BGB Analytik AG, Switzerland go back to 1992, when the company «Labor für Gaschromatographie» (Lab for Gas Chromatography) was founded in September with locations Roth-enfluh and Adliswil in Switzerland. The first official agency was with Polymicro Technologies™ (USA). Chromatographic services and the production of PressFits have been two important mainstays from the start.

BGB Analytik AG emerged from the company «Labor für Gaschromatographie» in 1993. The name BGB is made up of the first letters of the first names of the three company founders Bernhard, Georg, and Beat. In the same year BGB Analytik Germany was founded. They become various partners and official agencies have been added over the years. Today BGB Analytik has more than 30 partners. BGB Analytik's constant growth prompted it to relocate the Swiss location from Rothenfluh to Anwil in 2000 and then in 2003 to the current location in Böckten, Switzerland. The Böckten location, has 17 employees, a storage area of approx. 1000 m² and various office and seminar rooms.

BGB Analytik Germany emerged 2011 from a personal-name firm to BGB Analytik Vertrieb GmbH. The constant growth prompted it to relocate from Schlossböckelheim to Rheinfelden, Germany. 2019 an additional warehouse was opened in Lörrach, Germany. The locations in Lörrach and Rheinfelden have now 13 employees, a storage area of approx. 700 m² and various office rooms. Further BGB Analytik companies were founded in France (2013), USA (2014), the Netherlands for BeNe-Lux (2016) and Turkey (2018).

In 2023 BGB Analytik Switzerland and Germany are celebrating their 30th anniversary. Able to rely on its many years of experience and the knowledge of its employees, BGB Analytik can offer its customers the best possible solution in the field of chromatography. BGB Analytik is proud to be able to provide independent advice. Not being tied to a specific device brand, they are able to find the best possible solution for their customers.



CHROMATOGRAPHY IS OUR BUSINESS

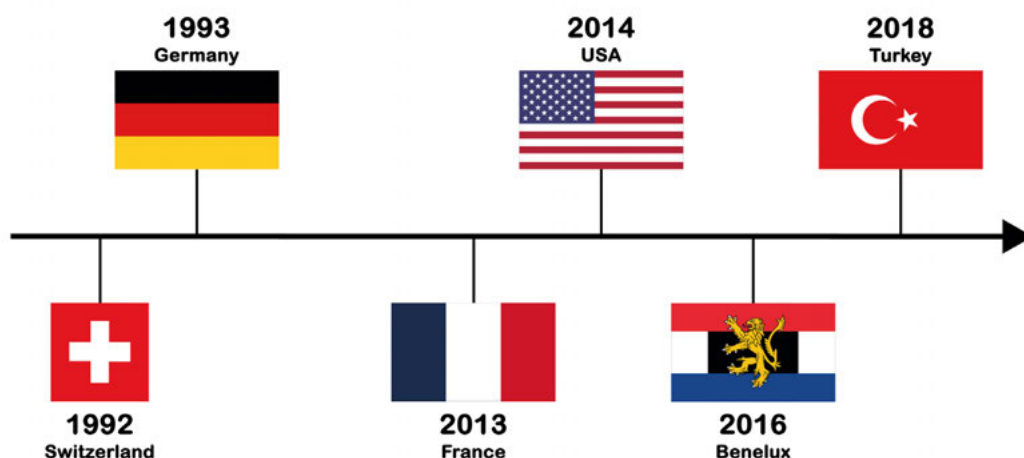


Table of Contents

Fused Silica Capillary Tubing.....	6–9
PressFit Connector and Splitter	10–13
GC Liners.....	14–19
GC Ferrules.....	20–23
Septa for GC Injectors.....	24
BGB Electronic Leak Detector	25
Vials and Accessories	26–52
- Vials and Caps	
- Crimping Tools	
- Vial Racks and Storage Boxes	
BGB Filter Vials.....	53–54
Filtration	55–64
- Syringe Filters	
- Plastic Disposable Syringes	
- Spin Filters	
- Well Filter Plates	
- Membrane Filter Disc	
- Vacuum Filtration Systems	
PEEK Tubing.....	65–67
Polymeric Tubing.....	68
Stainless Steel Tubing.....	69–70
Copper Tubing.....	70
Swagelok® Fittings and Unions.....	71–73
HPLC Adapters, Fittings and Unions	74–79
HPLC Safety Products.....	80–92
- Safety-Caps	
- Waste-Caps	
- Safety-Waste-Filters and Adapters	
- Fittings and Plugs for Safety- & Waste-Caps	
- Air Inlet Valve and Safety-Filters for Safety-Caps	
Syringes for GC and LC	93–99
Purification	100–123
- Flash Cartridges	
- Bulk Material	
- HPLC Columns	
- BGB EZPack empty Flash Cartridges	
Trademarks of Other Manufacturers.....	124
Acronyms	124
Part Number Index.....	125–133

Fused Silica Capillary Tubing of Polymicro

Polymicro Technologies offers 100 % synthetic fused silica tubing for a huge number of applications in GC, LC, CE and MS. Available are three coatings.



TSP Standard Polyimide Coating

- Operating temperature up to 350°C
- Mirror-smooth interior surfaces for stable flow of liquids and gases
- Low metal ion content provides an inert inner surface
- Offers excellent abrasion resistance during handling and usage
- Interfaces easily with existing fitting technologies



Part No.	ID (µm)	OD (µm)	Coating (µm)	Minimum Order (m)
TSP-002150	002 ± 1	150 ± 6	12	5
TSP-005150	005 ± 2	150 ± 6	12	5
TSP-005375	005 ± 2	363 ± 10	20	5
TSP-010150	010 ± 2	150 ± 6	12	5
TSP-010375	010 ± 2	363 ± 10	20	5
TSP-015150	015 ± 2	150 ± 6	12	5
TSP-015375	015 ± 2	363 ± 10	20	5
TSP-020090	020 ± 2	090 ± 6	12	5
TSP-020150	020 ± 2	150 ± 6	12	5
TSP-020375	020 ± 2	363 ± 10	20	5
TSP-025150	025 ± 2	150 ± 6	12	5
TSP-025375	025 ± 2	363 ± 10	20	5
TSP-030150	030 ± 2	150 ± 6	12	5
TSP-030375	030 ± 2	363 ± 10	20	5
TSP-040105	040 ± 3	105 ± 6	12	5
TSP-040150	040 ± 3	150 ± 6	12	5
TSP-040375	040 ± 3	363 ± 10	20	5
TSP-050150	050 ± 3	150 ± 6	12	5
TSP-050192	050 ± 3	186 ± 6	16	5
TSP-050375	050 ± 3	363 ± 10	20	5
TSP-075150	075 ± 3	150 ± 6	12	5
TSP-075200	075 ± 3	193 ± 7	12	5
TSP-075375	075 ± 3	363 ± 10	20	5
TSP-100170	100 ± 4	164 ± 6	12	5
TSP-100200	100 ± 4	193 ± 7	12	5
TSP-100245	100 ± 4	238 ± 7	16	5
TSP-100375	100 ± 4	363 ± 10	20	5
TSP-150375	150 ± 4	363 ± 10	20	5
TSP-180350	180 ± 6	360 ± 10	18	25
TSP-200350	200 ± 6	360 ± 10	18	25
TSP-250350	250 ± 6	360 ± 10	18	25
TSP-320450	320 ± 6	435 ± 10	18	25
TSP-530660	536 ± 6	665 ± 15	24	25
TSP-530700	530 ± 10	700 ± 20	24	25
TSP-700850	700 ± 10	850 ± 20	24	5

Quantity breaks available

TSP Standard Polyimide Coating with very small ID's (sub-1 µm)

Part No.	ID (nm)	OD (µm)	Coating (µm)	Length (m)
TSP000.2375NC	200 ± 100	363 ± 10	20	5
TSP000.6375NC	600 ± 100	363 ± 10	20	5
TSP001.0375NC	1000 ± 100	363 ± 10	20	5



Tubing Sleeves
see page 74

TSP Standard Polyimide Coating with Thick Wall

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSP-150665	150 ± 6	665 ± 15	24	10
TSP-200665	200 ± 6	665 ± 15	24	10
TSP-250665	250 ± 6	665 ± 15	24	10
TSP-300665	300 ± 6	665 ± 15	24	10
TSP-450670	450 ± 6	673 ± 15	24	10

TSP Standard Polyimide Coating with 1/32" OD

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSP-050794	50 ± 3	794 ± 12	24	10
TSP-075794	75 ± 3	794 ± 12	24	10
TSP-100794	100 ± 4	794 ± 12	24	10
TSP-200794	200 ± 6	794 ± 12	24	10
TSP-250794	250 ± 6	794 ± 12	24	10
TSP-300794	300 ± 6	794 ± 12	24	10
TSP-400794	400 ± 6	794 ± 12	24	10
TSP-500794	500 ± 6	794 ± 12	24	10

WWP Square Tubing with TSP Coating for CE

- Operating temperature up to 350°C

Part No.	ID (μm)	OD (μm)	Glass OD ¹⁾	Minimum Order (m)
WWP-050375	050 ± 5	363 ± 15	300	10
WWP-075375	075 ± 5	363 ± 15	300	10
WWP-100375	100 ± 5	363 ± 15	300	10



- Coating (Polyimide)
- Fused Silica
- Square ID

TSH UV-Transparent Coating

- Operating temperature up to 125°C

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSH-050375	050 ± 3	363 ± 10	20	10
TSH-075375	075 ± 3	363 ± 10	20	10
TSH-100375	100 ± 3	363 ± 10	20	10

TSU UV Transparent Coating for CE

- Operating temperature up to 160°C

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSU-050375	050 ± 3	363 ± 10	15	10
TSU-075375	075 ± 3	363 ± 10	15	10
TSU-100375	100 ± 4	363 ± 10	15	10

Quantity breaks available

¹⁾ Measured flat-to-flat

Cleaving Stone



BGB Cleaving Stone is made from hard ceramic, for cutting Fused Silica Capillary Tubing.

Part No.	Description	Qty.
CS	Cleaving Stone	pk.10



PressFit Connector and Splitter
see page 10

Deactivated FS-Capillary Tubing



BGB offers three different types of Deactivated Tubing for many applications in gas chromatography, liquide chromatography, mass spectrometry and capillary electrophoresis. Best inertness shows the standard phenyl/methyl deactivation. This is the best choice for the most common solvents. For solvents with traces of water the OV-1701-OH deactivation should be used. This deactivation is more stable against water or water containing solvents, but is less inert than a phenyl/methyl or methyl deactivation.

Each tubing is tested with a Grob-Test for best inertness. In contrast to other manufacturers we do check the complete batch and not only some meters of the batch.

Phenyl/Methyl Deactivated FS-Tubing

- Operating temperature up to 350°C

Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-D-10	025 ± 2	363 ± 10	10
TSP-050375-D-10	050 ± 3	363 ± 10	10
TSP-075375-D-10	075 ± 3	363 ± 10	10
TSP-100170-D-10	100 ± 4	164 ± 6	10
TSP-100200-D-10	100 ± 4	193 ± 7	10
TSP-100245-D-10	100 ± 4	238 ± 7	10
TSP-100375-D-10	100 ± 4	363 ± 10	10
TSP-150375-D-10	150 ± 4	363 ± 10	10
TSP-180350-D-10	180 ± 6	360 ± 10	10
TSP-200350-D-10	200 ± 6	360 ± 10	10
TSP-250350-D-10	250 ± 6	360 ± 10	10
TSP-320450-D-10	320 ± 6	435 ± 10	10
TSP-530660-D-10	536 ± 6	665 ± 15	10
TSP-530700-D-10	530 ± 10	700 ± 20	10



OV-1701-OH Deactivated FS-Tubing (water-resistant)

- Operating temperature up to 350°C

Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-P-10	025 ± 2	363 ± 10	10
TSP-050375-P-10	050 ± 3	363 ± 10	10
TSP-075375-P-10	075 ± 3	363 ± 10	10
TSP-100375-P-10	100 ± 4	363 ± 10	10
TSP-250350-P-10	250 ± 6	360 ± 10	10
TSP-320450-P-10	320 ± 6	435 ± 10	10
TSP-530660-P-10	536 ± 6	665 ± 15	10
TSP-530700-P-10	530 ± 10	700 ± 20	10

Other dimensions available on request.

Cleaving Stone



BGB Cleaving Stone is made from hard ceramic, for cutting Fused Silica Capillary Tubing.

Part No.	Description	Qty.
CS	Cleaving Stone	pk.10

Methyl Deactivated FS-Tubing

- Operating temperature up to 350°C

Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-M-10	025 ± 2	363 ± 10	10
TSP-050375-M-10	050 ± 3	363 ± 10	10
TSP-075375-M-10	075 ± 3	363 ± 10	10
TSP-100170-M-10	100 ± 4	164 ± 6	10
TSP-100200-M-10	100 ± 4	193 ± 7	10
TSP-100245-M-10	100 ± 4	238 ± 7	10
TSP-100375-M-10	100 ± 4	363 ± 10	10
TSP-150375-M-10	150 ± 4	363 ± 10	10
TSP-180350-M-10	180 ± 6	360 ± 10	10
TSP-200350-M-10	200 ± 6	360 ± 10	10
TSP-250350-M-10	250 ± 6	360 ± 10	10
TSP-320450-M-10	320 ± 6	435 ± 10	10
TSP-530660-M-10	536 ± 6	665 ± 15	10
TSP-530700-M-10	530 ± 10	700 ± 20	10

LVI-Gap for Large Volume Injection

The LVI-Gap is a phenyl/methyl deactivated FS Tubing of 15m x 0.53mm ID, with a thin film of a silicone on the last 3m. This tubing is optimized for large volume injections in gas chromatography. The compounds in the solvent will be trapped in the phase and separated from the solvent. After evaporating the solvent, the compounds can be transferred to the analytical column.

Part No.	Coating	Dimensions	OD (µm)
26060427	0.25 µm BGB-5	15m x 0.53 mm	700 ±20
26060425	0.45 µm BGB-5	15m x 0.53 mm	700 ±20



PressFit Connector and
Splitter

see page 10

BGB PressFit Connector and Splitter



PressFit-Connectors and -Splitters are made out of borosilicate glass to connect two or more capillary columns together. The seal of this connection type is the coating on the outside of the capillary tubing. This polyimide is soft and adhesive. Many applications in gas chromatography and mass spectrometry are possible.

- Couple a capillary column with a pre-column
- Couple capillary columns of different polarities
- Couple capillary columns for increasing length
- Repair a broken capillary column
- Split before and/or after the capillary column
- Switch between different capillary columns (multidimensional gas chromatography)

How it works

PressFit connectors form a leak-tight seal by using concentric compressive forces as the tubing end is pushed into a tightly controlled radial restriction. These forces are strong enough to form a leak-tight seal under the normal pressures used in capillary GC. The seal is further strengthened as an exterior polyimide resin coating on the column bonds to the inner surface of the connector after several thermal cycles at 200°C.

To obtain a good connection it is necessary to clean the end's of the tubing's with some solvent. Remove 1 cm of the tubing by making a cut with a ceramic scoring wafer into the polyimide surface and bend the tubing until it breaks. Examine the end with a pocket magnifier for a proper cut. A poorly cutted capillary column will produce an inadequate seal. Repeat this step if necessary. If the cut is smooth, the tubing can be pushed into the PressFit.

Our PressFit's are made out of borosilicate glass. For most of the applications a deactivated surface is not necessary, because of the short contact of the sample with the surface (<20ms). Nevertheless we recommend for critical compounds the use of deactivated PressFit's.

MS-Fit Connector and Splitter

The MS-Fit Connector and Splitter are the next generation of our PressFit products. The taper inside and the length are improved for a better sealing, also with the modern coatings used to make fused silica tubing. These hard coatings are very often the cause of leaks, which are typical seen in mass spectrometry.

PressFit Color Code*



Internal Diameter FS-Tubing	External Diameter FS-Tubing	Color
0.20 mm	0.29 - 0.36 mm	purple ●
0.25 mm	0.34 - 0.38 mm	red ●
0.32 mm	0.41 - 0.48 mm	black ●
0.53 mm	0.61 - 0.70 mm	blue ●

* The standard PressFit connector is optimized for a defined outer capillary diameter. Outer diameters of columns of different origin vary to some extent.



Defined PressFit Connector – Deactivated



Part No.	ID _A (mm)	ID _B (mm)	Qty.
2020LD	0.20	0.20	pk.25
2025LD	0.20	0.25	pk.25
2032LD	0.20	0.32	pk.25
2053LD	0.20	0.53	pk.25
2525LD	0.25	0.25	pk.25
2532LD	0.25	0.32	pk.25
2553LD	0.25	0.53	pk.25
3232LD	0.32	0.32	pk.25
3253LD	0.32	0.53	pk.25
5353LD	0.53	0.53	pk.25

Universal PressFit Connector – Deactivated



Part No.	External Diameter	Qty.
UNIAD	0.30 to 0.75 mm OD	pk.10
UNIBD	0.20 to 0.75 mm OD	pk.10

MS-Fit Connector and Splitter – Deactivated



Part No.	Type	External Diameter	Qty.
MS-FIT	Connector	0.30 to 0.50 mm	pk.10
MS-FIT3	3-way Splitter	0.30 to 0.50 mm	ea.
MS-FIT4-T	4-way T-Splitter	0.30 to 0.50 mm	ea.
MS-FIT4-X	4-way X-Splitter	0.30 to 0.50 mm	ea.



GC Liners
see page 14

Defined PressFit 3-way Splitter – Deactivated



Part No.	ID _A (mm) Inlet	ID _B (mm) Outlet 1	ID _C (mm) Outlet 2	Qty.
S202020D	0.20 ●	0.20 ●	0.20 ●	ea.
S252525D	0.25 ●	0.25 ●	0.25 ●	ea.
S323232D	0.32 ●	0.32 ●	0.32 ●	ea.
S535353D	0.53 ●	0.53 ●	0.53 ●	ea.

Other combinations:

S-AA-BB-CC-D	AA	BB	CC	ea.
--------------	----	----	----	-----

Universal PressFit 3-way Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI3AD	0.30 to 0.75 mm OD	ea.
SUNI3BD	0.20 to 0.75 mm OD	ea.

Defined PressFit 4-way Y-Splitter – Deactivated



Part No.	ID _A (mm) Inlet	ID _B (mm) Outlet 1	ID _C (mm) Outlet 2	ID _D (mm) Outlet 3	Qty.
S20202020TD	0.20 ●	0.20 ●	0.20 ●	0.20 ●	ea.
S25252525TD	0.25 ●	0.25 ●	0.25 ●	0.25 ●	ea.
S32323232TD	0.32 ●	0.32 ●	0.32 ●	0.32 ●	ea.
S53535353TD	0.53 ●	0.53 ●	0.53 ●	0.53 ●	ea.

Other combinations:

S-AA-BB-CC-DD-TD	AA	BB	CC	DD	ea.
------------------	----	----	----	----	-----

Universal PressFit 4-way Y-Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI4TAD	0.30 to 0.75 mm OD	ea.
SUNI4TBD	0.20 to 0.75 mm OD	ea.



Part No.	ID _A (mm) Inlet	ID _B (mm) Inlet 2	ID _C (mm) Outlet 1	ID _D (mm) Outlet 2	Qty.
S20202020XD	0.20 	0.20 	0.20 	0.20 	ea.
S25252525XD	0.25 	0.25 	0.25 	0.25 	ea.
S32323232XD	0.32 	0.32 	0.32 	0.32 	ea.
S53535353XD	0.53 	0.53 	0.53 	0.53 	ea.

Other combinations:

S-AA-BB-CC-DD-XD	AA	BB	CC	DD	ea.
------------------	----	----	----	----	-----

Defined PressFit 4-way X-Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI4XAD	0.30 to 0.75 mm OD	ea.
SUNI4XBD	0.20 to 0.75 mm OD	ea.


Custom made Connectors or Splitters are available on request.

Hexagon Key Set, 30 pieces (mm & inch)



Metric: 0.7; 0.9; 1.27; 1.5; 2.0; 2.5; 4.0; 4.5; 5.0; 5.5;
6.0; 7.0; 8.0; 10.0 mm
Inch: 0.028; 0.036; 0.05; 1/16; 5/64; 3/32; 7/64; 1/8;
9/64; 5/32; 3/16; 7/32; 1/4; 5/16 and 3/8 inch
Material: Chrome-Vanadium Steel

Part No.	Description	Qty.
IMBUS	Hexagon Key Set (mm & inch), Chrome Vanadium Steel	ea.



Fused Silica Tubing
see page 6

GC Liners

Deactivated Splitless Liners for Agilent Instruments



Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.

<--- column end this side



Splitless Liner 2.0 mm ID, 6.5 x 78.5 mm
trace samples <2 µl
5181-8818, 5183-4703, 5183-4704

LS1104 **LS1104-5**
ea. pk.5

<--- column end this side



Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm
trace samples >2 µl
210-3003, 210-3003-5

LS1105 **LS1105-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Splitless Liner with Wool, 4.0 mm ID, 6.5 x 78.5 mm
trace samples >2 µl
-

LS1106 **LS1106-5**
ea. pk.5



Single Gooseneck Splitless Liner, 2.0 mm ID, 6.5 x 78.5 mm
trace samples <2 µl
-

LS1103 **LS1103-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Single Gooseneck Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm
trace samples >2 µl
5181-3316, 5183-4695, 5183-4696, 5190-2270

LS1100 **LS1100-5**
ea. pk.5



Single Gooseneck Splitless Liner w. Wool, 4.0 mm ID, 6.5 x 78.5 mm
trace samples >2 µl
5062-3587, 5183-4693, 5183-4694, 5190-2271

LS1101 **LS1101-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Double Gooseneck Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm
active, trace samples >2 µl
5181-3315, 5183-4705, 5183-4706, 5190-2272

LS1102 **LS1102-5**
ea. pk.5



Double Gooseneck Cyclo Splitless Liner, 2.0 mm ID, 6.5 x 78.5 mm
active, dirty, trace samples <2 µl
-

LS1107 **LS1107-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Double Gooseneck Cyclo Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm
active, dirty, trace samples >2 µl
-

LS1108 **LS1108-5**
ea. pk.5

Deactivated PTV Liners for Agilent Instruments

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



PTV Liner, straight Glass, 2.0 mm ID, 3.0 x 71 mm
general use
5183-2036

LS1200 **LS1200-5**
ea. pk.5



PTV Liner, baffled Glass, 1.5 mm ID, 3.0 x 71 mm
active compounds, drugs, pesticides
5183-2037

LS1201 **LS1201-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



PTV Liner, with Wool, 2.0 mm ID, 3.0 x 71 mm
large volume injections
5183-2038

LS1202 **LS1202-5**
ea. pk.5

Deactivated Split Liners for Agilent Instruments

<--- column end this side

<--- column end this side

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Split Liner with Wool, 4.0mm ID, 6.3 x 78.5 mm
universal
19251-60540, 5183-4691, 5183-4692

LS1000 **LS1000-5**
ea. pk.5



Cup Splitter Liner, 4.0mm ID, 6.3 x 78.5 mm
high & low MW compounds
18740-80190, 5183-4699, 5183-4700

LS1001 **LS1001-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Cyclosplitter Liner, 4.0mm ID, 6.3 x 78.5 mm
dirty samples
-

LS1002 **LS1002-5**
ea. pk.5



Split Precision Liner with Wool, 4.0mm ID, 6.3 x 78.5 mm
dirty samples, trace samples
210-4004-5

LS1003 **LS1003-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Single Gooseneck Precision Split Liner with Wool,
4.0mm ID, 6.3 x 78.5 mm
dirty samples, trace samples
210-4022-5

LS1004 **LS1004-5**
ea. pk.5



Low Pressure Drop Single Gooseneck Precision Split Liner
with Wool, 4.0mm ID, 6.3 x 78.5 mm
universal
-

LS1005 **LS1005-5**
ea. pk.5

Description Benefits/Uses

Similar to Agilent #

Part No.
Qty.



Low Pressure Drop Split Liner with Wool,
4.0mm ID, 6.3 x 78.5 mm
universal
5183-4647, 5183-4701, 5183-4702, 5183-4711, 5183-4712, 5183-4713

LS1006 **LS1006-5**
ea. pk.5



SPME Split Liner, 0.75 mm ID, 6.3 x 78.5 mm
ideal for low-volume, SPME applications
-

LS1007 **LS1007-5**
ea. pk.5

Inlet Seals, Capillary Column Nuts and MSD Source Nuts for Agilent Instruments

Description Similar to Agilent

Part No.
Qty.



Gold-plated Inlet Seal (incl. Washer), 0.8mm hole
18740-20885, 5188-5367 18740-20880

LS9000 **LS9000-5**
ea. pk.5



Stainless Steel Inlet Seal (incl. Washer), 0.8mm hole

LS9001 **LS9001-5**
ea. pk.5

Description Similar to Agilent

Part No.
Qty.



Capillary Column Nut, Stainless Steel,
for use with "Compact" Ferrules
5181-8830

LS9002 **LS9002-5**
ea. pk.5



Capillary Column Nut, Stainless Steel,
for use with Standard 1/16" Ferrules
05921-21170

LS9003 **LS9003-5**
ea. pk.5

Description Similar to Agilent

Part No.
Qty.



MSD Source Nut, Brass
05988-20066

LS9004 **LS9004-5**
ea. pk.5

Deactivated Liners for Bruker/Varian 1177 S/SL Injector

		<--- column end this side	
			
Description	Split Liner with Frit, 4.0 mm ID, 6.3 x 78.5 mm	Split Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm	
Benefits/Uses	universal	universal	
	-	392611934	
Part No.	LS3000	LS3000-5	LS3001
Qty.	ea.	pk.5	ea.
			LS3001-5
			pk.5
		<--- column end this side	
			
Description	Split Precision Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm	Single Gooseneck Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm	
Benefits/Uses	dirty samples, trace samples	trace samples <2 µl	
	-	392611927	
Part No.	LS3002	LS3002-5	LS3003
Qty.	ea.	pk.5	ea.
			LS3003-5
			pk.5
		<--- column end this side	
			
Description	Single Gooseneck Splitless Liner with Wool, 4.0 mm ID, 6.5 x 78.5 mm	Double Gooseneck Splitless Liner, 4.0 mm ID, 6.5 x 78.5 mm	
Benefits/Uses	trace samples <2 µl	active, trace samples <2 µl	
	392611928	392611929	
Part No.	LS3004	LS3004-5	LS3005
Qty.	ea.	pk.5	ea.
			LS3005-5
			pk.5
		<--- column end this side	
			
Description	Low Pressure Drop Precision Liner with Wool, 2.0 mm ID, 6.3 x 78.5 mm	Splitless Liner with Wool, 2.0 mm ID, 6.5 x 78.5 mm	
Benefits/Uses	dirty samples, trace samples <2 µl	trace samples <2 µl	
	-	392599903	
Part No.	LS3006	LS3006-5	LS3007
Qty.	ea.	pk.5	ea.
			LS3007-5
			pk.5

Deactivated Liners for Bruker/Varian SPI S/SL Injector

		<--- column end this side	
			
Description	Liner 0.53mm, 4.6 x 54mm	Liner 0.8mm, 4.6 x 54mm	
Benefits/Uses	high linearity for 0.25 & 0.32mm ID columns	high linearity for 0.53mm ID columns	
	190010906	190010907	
Part No.	LS3200	LS3200-5	LS3201
Qty.	ea.	pk.5	ea.
			LS3201-5
			pk.5

Capillary Nuts for Bruker/Varian Instruments

		<--- column end this side	
			
Description	Capillary Nuts, Brass	Capillary Nuts, Stainless Steel	
	03-949551-00, 394955100	03-949551-00, 394955100	
Part No.	LS9006	LS9006-5	LS9007
Qty.	ea.	pk.5	ea.
			LS9007-5
			pk.5

Deactivated Liners for Bruker/Varian 1078/1079 Injectors

Description Benefits/Uses Similar to Bruker/Varian #				
	Split Liner with Frit, 3.4 mm ID, 5.0 x 54 mm dirty samples, non-active compounds 392611946		Splitless Liner, 2 mm ID, 5.0 x 54 mm trace samples <2 µl 392611947	
Part No.	LS3100	LS3100-5	LS3101	LS3101-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Open Liner, 0.5 mm ID, 5.0 x 54 mm trace samples <1 µl 392611949		Open Liner, 0.75 mm ID, 5.0 x 54 mm trace, low volume samples 392611948	
Part No.	LS3102	LS3102-5	LS3103	LS3103-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Split Liner, without Frit, 3.4 mm ID, 5.0 x 54 mm active samples 392611945		Split Precision Liner with Wool, 3.4 mm ID, 5.0 x 54 mm dirty samples, trace samples -	
Part No.	LS3104	LS3104-5	LS3105	LS3105-5
Qty.	ea.	pk.5	ea.	pk.5



Autosampler & Manual Syringes
 see page 93




Deactivated Split and Splitless Liners for Bruker/Varian 1075/1077 S/SL Injectors

				
	<--- column end this side		<--- column end this side	
Description Benefits/Uses Similar to Bruker/Varian #	Split Liner, 1 mm ID, 6.3 x 72 mm purge & trap inlet, splitting or samples <1 µl -		Split Liner with Wool, 4 mm ID, 6.3 x 72 mm universal 190010901	
Part No.	LS3400	LS3400-5	LS3401	LS3401-5
Qty.	ea.	pk.5	ea.	pk.5
				
	Cup Splitter, 4 mm ID, 6.3 x 72 mm high & low molecular weight compounds -		Cyclo Splitter, 4 mm ID, 6.3 x 72 mm dirty samples -	
Description Benefits/Uses Similar to Bruker/Varian #	Cup Splitter, 4 mm ID, 6.3 x 72 mm high & low molecular weight compounds -		Cyclo Splitter, 4 mm ID, 6.3 x 72 mm dirty samples -	
Part No.	LS3402	LS3402-5	LS3403	LS3403-5
Qty.	ea.	pk.5	ea.	pk.5
				
	Split Liner with Frit, 4 mm ID, 6.3 x 72 mm dirty samples, non-active compounds 190010903		Split Precision Liner with Wool, 4 mm ID, 6.3 x 72 mm active samples, dirty samples -	
Description Benefits/Uses Similar to Bruker/Varian #	Split Liner with Frit, 4 mm ID, 6.3 x 72 mm dirty samples, non-active compounds 190010903		Split Precision Liner with Wool, 4 mm ID, 6.3 x 72 mm active samples, dirty samples -	
Part No.	LS3404	LS3404-5	LS3405	LS3405-5
Qty.	ea.	pk.5	ea.	pk.5
				
	Splitless Liner, 2 mm ID, 6.3 x 74 mm trace samples <2 µl 190010905		Splitless Liner, 4 mm ID, 6.3 x 74 mm trace samples >2 µl -	
Description Benefits/Uses Similar to Bruker/Varian #	Splitless Liner, 2 mm ID, 6.3 x 74 mm trace samples <2 µl 190010905		Splitless Liner, 4 mm ID, 6.3 x 74 mm trace samples >2 µl -	
Part No.	LS3300	LS3300-5	LS3301	LS3301-5
Qty.	ea.	pk.5	ea.	pk.5
				
	SPME Liner, 0.75 mm ID, 6.3 x 74 mm ideal for low-volume SPME applications -		Double Gooseneck Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, trace samples up to 4 µl -	
Description Benefits/Uses Similar to Bruker/Varian #	SPME Liner, 0.75 mm ID, 6.3 x 74 mm ideal for low-volume SPME applications -		Double Gooseneck Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, trace samples up to 4 µl -	
Part No.	LS3302	LS3302-5	LS3303	LS3303-5
Qty.	ea.	pk.5	ea.	pk.5
				
	Double Gooseneck Cyclo Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, dirty samples, trace samples up to 4 µl -			
Description Benefits/Uses Similar to Bruker/Varian #	Double Gooseneck Cyclo Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, dirty samples, trace samples up to 4 µl -			
Part No.	LS3304	LS3304-5		
Qty.	ea.	pk.5		

Capillary Nuts for Bruker/Varian Instruments

				
	Capillary Nuts, Brass 03-949551-00, 394955100		Capillary Nuts, Stainless Steel 03-949551-00, 394955100	
Description Similar to Bruker/Varian #	Capillary Nuts, Brass 03-949551-00, 394955100		Capillary Nuts, Stainless Steel 03-949551-00, 394955100	
Part No.	LS9006	LS9006-5	LS9007	LS9007-5
Qty.	ea.	pk.5	ea.	pk.5

Deactivated Split and Splitless Liners for Thermo Scientific Instruments

Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 1.0 mm ID, 8.0 x 105 mm purge, trap & fast GC 45320075		Split Liner, 3.0 mm ID, 8.0 x 105 mm universal 45320031	
Part No.	LS2000	LS2000-5	LS2001	LS2001-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 5.0 mm ID, 8.0 x 105 mm universal 45320030		Split Precision Liner with Wool, 5.0 mm ID, 8.0 x 105 mm dirty samples, trace samples -	
Part No.	LS2002	LS2002-5	LS2003	LS2003-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Splitless Liner, 2.0 mm ID, 8.0 x 105 mm trace samples -		Splitless Liner, 3.0 mm ID, 8.0 x 105 mm trace samples 45320032	
Part No.	LS2103	LS2103-5	LS2100	LS2100-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Splitless Liner, 5.0 mm ID, 8.0 x 105 mm trace samples 45320033		Splitless Precision Liner with Wool, 5.0 mm ID, 8.0 x 105 mm dirty samples, trace samples -	
Part No.	LS2101	LS2101-5	LS2102	LS2102-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 1.0 mm ID, 2.75 x 120 mm trace samples, high recovery & linearity 45322054		Split Liner, 2.0 mm ID, 2.75 x 120 mm universal 45322045	
Part No.	LS2200	LS2200-5	LS2201	LS2201-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Baffle Liner, 2.0 mm ID, 2.75 x 120 mm trace samples -			
Part No.	LS2202	LS2202-5		
Qty.	ea.	pk.5		

Inlet Sealing Ring, Fixing Nut and Cup Ferrules for Thermo Scientific Instruments

Description Similar to Thermo Scientific #						
	Inlet Liner Ring for SSL Injector 29033406		Inlet Liner Ring for PTV Injector 29013417		Column Fixing Nut 35032423	
Part No.	29033406	29013417	LS9005	LS9005-5		
Qty.	pk.2	pk.2	ea.	pk.5		

	Part No.	Description	Similar to Thermo Scientific #	Qty.
	29013488	0.38 mm ID Cup Ferrule for Thermo M4 nut	29053488	pk.10
	29013487	0.48 mm ID Cup Ferrule for Thermo M4 nut	29053487	pk.10
	29013486	0.8 mm ID Cup Ferrule for Thermo M4 nut	29053486	pk.10

GC Ferrules

Graphite Ferrules

- Upper temperature limit 450 °C
- High-purity graphite – preferred for capillary GC use
- Ideal for glass-to-metal connections – doesn't stick to glass
- Precision formed – flash-free ID
- Reusable if not overtightened
- One-piece design requires no back ferrule



Standard 1/16"



Part No.	Description	Qty.
G1604	1/16" x 0.4mm ID	pk.10
G1625	1/16" x 0.5mm ID, 2-hole	pk.10
G1605	1/16" x 0.5mm ID	pk.10
G1608	1/16" x 0.8mm ID	pk.10
G1610	1/16" x 1.0mm ID	pk.10
G1612	1/16" x 1.2mm ID	pk.10
G1616	1/16" x 1/16" ID	pk.10
G1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
G1804	1/8" x 0.4mm ID	pk.10
G1805	1/8" x 0.5mm ID	pk.10
G1808	1/8" x 0.8mm ID	pk.10
G1812	1/8" x 1.2mm ID	pk.10
G1816	1/8" x 1/16" ID	pk.10
G1818	1/8" x 1/8" ID	pk.10
G1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
G1405	1/4" x 0.5mm ID	pk.10
G1408	1/4" x 0.8mm ID	pk.10
G1416	1/4" x 1/16" ID	pk.10
G1414	1/4" x 1/4" ID	pk.10
G1418	1/4" x 1/8" ID	pk.10
G1440	1/4" x 4.0mm ID	pk.10
G1460	1/4" x 6.0mm ID	pk.10
G1400	1/4", no-hole	pk.10

Standard 3/8", 1/2" and 3/4"



Part No.	Description	Qty.
G3838	3/8" x 3/8" ID	pk.10
G1212	1/2" x 1/2" ID	pk.5
G3434	3/4" x 3/4" ID	pk.5

Short Ferrules for Agilent



Part No.	Description	Qty.
G1604-HP	Short, 1/16" x 0.4mm ID	pk.10
G1605-HP	Short, 1/16" x 0.5mm ID	pk.10
G1608-HP	Short, 1/16" x 0.8mm ID	pk.10
G1610-HP	Short, 1/16" x 1.0mm ID	pk.10
G1612-HP	Short, 1/16" x 1.2mm ID	pk.10
G1418-HP	Short, 1/4" x 1/8" ID	pk.10
G1460-S	Short, 1/4" x 6.0mm ID	pk.10

Ferrules for Thermo / Carlo Erba



Part No.	Description	Qty.
G1805-CE	0.5mm ID for M8-Nut (CE-Taper)	pk.10
G1808-CE	0.8mm ID for M8-Nut (CE-Taper)	pk.10

Ferrules for Shimadzu



Part No.	Description	Qty.
GSH50	5 mm ID	pk.10
GSH04	0.4 mm ID for Shimadzu 17A, 2010 & 2014	pk.10
GSH05	0.5 mm ID for Shimadzu 17A, 2010 & 2014	pk.10
GSH08	0.8 mm ID for Shimadzu 17A, 2010 & 2014	pk.10

Cup Ferrules for Thermo / Carlo Erba



Part No.	Description	Qty.
29013489	0.28 mm ID Cup Ferrule M4 nut	pk.10
29013488	0.38 mm ID Cup Ferrule M4 nut	pk.10
29013487	0.48 mm ID Cup Ferrule M4 nut	pk.10
29013486	0.80 mm ID Cup Ferrule M4 nut	pk.10

Liner Seals and O-Rings

- Graphite and Fluoroelastomer Liner Seals

For Agilent Instruments



Part No.	Description	Qty.
GS635-HP	Graphite Liner Seal, 6.35 mm ID	pk.10
GS652-HP	Graphite Liner Seal, 6.52 mm ID	pk.10

For Perkin Elmer Instruments



Part No.	Description	Qty.
GSPE01	Graphite O-Ring	pk.10

For Varian 1078/1079



Part No.	Description	Qty.
GSBV01	Graphite Liner Ferrule	pk.10

For Shimadzu Instruments



Part No.	Description	Qty.
GSSH01	Graphite Liner Seal	pk.10



GSSH02	Graphite O-Ring, Split	pk.10
GSSH03	Graphite O-Ring, Splitless	pk.10

For Thermo Scientific Instruments




Part No.	Description	Qty.
29013417	Inlet Liner Ring for PTV Injector	pk.2



29033406	Inlet Liner Ring for SSL Injector	pk.2
-----------------	-----------------------------------	------

Graphite/Vespel® Ferrules

- Upper temperature limit 400 °C
- 40 % Graphite/60 % Vespel
- Made from quality DuPont Vespel/graphite blend
- Recommended for GC/MS interface applications
- One-piece design requires no back ferrule

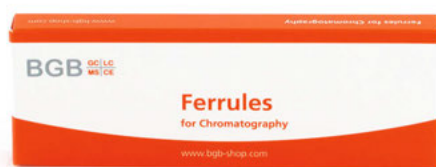

Standard 1/16"



Part No.	Description	Qty.
GV1602	1/16" x 0.2 mm ID	pk.10
GV1603	1/16" x 0.3 mm ID	pk.10
GV1623	1/16" x 0.3 mm ID, 2-hole	pk.10
GV16234	1/16" x 0.3 & 0.4 mm ID, 2-hole	pk.10
GV16235	1/16" x 0.3 & 0.5 mm ID, 2-hole	pk.10
GV1633	1/16" x 0.3 mm ID, 3-hole	pk.10
GV1604	1/16" x 0.4 mm ID	pk.10
GV1624	1/16" x 0.4 mm ID, 2-hole	pk.10
GV16245	1/16" x 0.4 & 0.5 mm ID, 2-hole	pk.10
GV1634	1/16" x 0.4 mm ID, 3-hole	pk.10
GV1605	1/16" x 0.5 mm ID	pk.10
GV1625	1/16" x 0.5 mm ID, 2-hole	pk.10
GV1608	1/16" x 0.8 mm ID	pk.10
GV1609	1/16" x 0.9 mm ID	pk.10
GV1610	1/16" x 1.0 mm ID	pk.10
GV1616	1/16" x 1/16" ID	pk.10
GV1600	1/16", no-hole	pk.10

Standard 1/2"



Part No.	Description	Qty.
GV1212	1/2" x 1/2" ID	pk.5

Short Ferrules for Agilent



Part No.	Description	Qty.
GV1603-HP	Short, 1/16" x 0.3 mm ID	pk.10
GV1604-HP	Short, 1/16" x 0.4 mm ID	pk.10
GV1605-HP	Short, 1/16" x 0.5 mm ID	pk.10
GV1608-HP	Short, 1/16" x 0.8 mm ID	pk.10
GV1600-HP	Short, 1/16" ID – no hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
GV1804	1/8" x 0.4 mm ID	pk.10
GV1825	1/8" x 0.5 mm ID, 2-hole	pk.10
GV1805	1/8" x 0.5 mm ID	pk.10
GV1828	1/8" x 0.8 mm ID, 2-hole	pk.10
GV1808	1/8" x 0.8 mm ID	pk.10
GV1816	1/8" x 1/16" ID	pk.10
GV1818	1/8" x 1/8" ID	pk.10
GV1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
GV1405	1/4" x 0.5 mm ID	pk.10
GV1408	1/4" x 0.8 mm ID	pk.10
GV1416	1/4" x 1/16" ID	pk.10
GV1414	1/4" x 1/4" ID	pk.10
GV1418	1/4" x 1/8" ID	pk.10
GV1460	1/4" x 6.0 mm ID	pk.10
GV1400	1/4", no-hole	pk.10

Ferrules for Carlo Erba

15 % Graphite/85 % Vespel, upper temperature limit 350 °C



Part No.	Description	Qty.
29033461	0.4 mm ID for M8-Nut (CE-Taper)	pk.10
29033460	0.5 mm ID for M8-Nut (CE-Taper)	pk.10
29033471	0.8 mm ID for M8-Nut (CE-Taper)	pk.10

Vespe^l® Ferrules



- Upper temperature limit 350°C
- 100 % high-temperature DuPont Vespe^l
- Precision-drilled ID – no imperfections from moulding
- One-piece design requires no back ferrule
- Fairly hard – tends to seal permanently to the column

Standard 1/16"



Part No.	Description	Qty.
V1603	1/16" x 0.3 mm ID	pk.10
V1624	1/16" x 0.4 mm ID, 2-hole	pk.10
V1604	1/16" x 0.4 mm ID	pk.10
V1625	1/16" x 0.5 mm ID, 2-hole	pk.10
V1605	1/16" x 0.5 mm ID	pk.10
V1608	1/16" x 0.8 mm ID	pk.10
V1610	1/16" x 1.0 mm ID	pk.10
V1612	1/16" x 1.2 mm ID	pk.10
V1616	1/16" x 1/16" ID	pk.10
V1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
V1804	1/8" x 0.4 mm ID	pk.10
V1825	1/8" x 0.5 mm ID, 2-hole	pk.10
V1805	1/8" x 0.5 mm ID	pk.10
V1828	1/8" x 0.8 mm ID, 2-hole	pk.10
V1808	1/8" x 0.8 mm ID	pk.10
V1816	1/8" x 1/16" ID	pk.10
V1818	1/8" x 1/8" ID	pk.10
V1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
V1416	1/4" x 1/16" ID	pk.10
V1414	1/4" x 1/4" ID	pk.10
V1418	1/4" x 1/8" ID	pk.10
V1400	1/4", no-hole	pk.10

Short Ferrules for Agilent



Part No.	Description	Qty.
V1604-HP	Short, 1/16" x 0.4 mm ID	pk.10
V1605-HP	Short, 1/16" x 0.5 mm ID	pk.10
V1608-HP	Short, 1/16" x 0.8 mm ID	pk.10

PTFE Ferrules



- Upper temperature limit 250°C
- 100 % PTFE – completely inert
- One-piece design requires no back ferrule

Standard 1/16"



Part No.	Description	Qty.
T1603	1/16" x 0.3 mm ID	pk.10
T1604	1/16" x 0.4 mm ID	pk.10
T1605	1/16" x 0.5 mm ID	pk.10
T1608	1/16" x 0.8 mm ID	pk.10
T1610	1/16" x 1.0 mm ID	pk.10
T1612	1/16" x 1.2 mm ID	pk.10
T1616	1/16" x 1/16" ID	pk.10
T1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
T1804	1/8" x 0.4 mm ID	pk.10
T1825	1/8" x 0.5 mm ID, 2-hole	pk.10
T1805	1/8" x 0.5 mm ID	pk.10
T1808	1/8" x 0.8 mm ID	pk.10
T1816	1/8" x 1/16" ID	pk.10
T1818	1/8" x 1/8" ID	pk.10
T1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
T1416	1/4" x 1/16" ID	pk.10
T1414	1/4" x 1/4" ID	pk.10
T1418	1/4" x 1/8" ID	pk.10
T14316	1/4" x 3/16" ID	pk.10
T1400	1/4", no-hole	pk.10

Standard 3/16"



Part No.	Description	Qty.
T316316	3/16" x 3/16" ID	pk.10

Septa for GC Injectors

- Center point guides the needle for easy penetration
- Reduce needle bending
- Precision molding assures accurate fit
- Available in selected sizes of our premium septa
- Packaged in glass vials for high purity



Premium Septa Advanced Green 3

The Advanced Green 3 Septum was specifically created to combine significantly longer injection life, low bleed and low injection port adhesion. The result is a green septum you can use for all your critical analysis. Septa are 3mm thick, except Shimadzu-style plug.



Part No.	Description	Qty.
SA5	5 mm CenterGuide	pk.50
SA9	9 mm CenterGuide	pk.50
SA95	9.5 mm (3/8")	pk.50
SA11	11 mm (7/16") CenterGuide	pk.50
SA11-100	11 mm (7/16") CenterGuide	pk.100
SA115	11.5 mm CenterGuide	pk.50
SA127	12.7 mm (1/2") CenterGuide	pk.50
SA17	17 mm	pk.50
SAS	for Shimadzu	pk.50

Premium Septa Marathon

The Marathon Septum typically achieves 400 injections without failure, when used with a rounded-tip (Agilent-style) needle and autosampler or needle guide. The CenterGuide versions of Marathon are pre-pierced to channel the needle through the same spot with each injection, which helps eliminate the common type of coring that occurs on the first injection. The Marathon septum is also ideal for standard manual-injection GC and GC/MS. Septa are 3mm thick, except Shimadzu-style plug septa.



Part No.	Description	Qty.
SM5-50	5 mm CenterGuide	pk.50
SM9-50	9 mm CenterGuide	pk.50
SM11-50	11 mm (7/16") CenterGuide	pk.50
SM11-100	11 mm (7/16") CenterGuide	pk.100
SM115-50	11.5 mm CenterGuide	pk.50
SM127-50	12.7 mm (1/2") CenterGuide	pk.50
SM17-50	17 mm	pk.50
SMS-50	for Shimadzu	pk.50

Premium Septa BTO

Septa BTO is bleed and temperature optimized for today's most demanding GC and GC/MS applications. Septa BTO is formulated to extend low-bleed and outstanding mechanical properties of premium GC septa to the highest-temperature applications (400 °C with most modern GCs).



Part No.	Description	Qty.
SB5	5 mm CenterGuide	pk.50
SB64	6.4 mm (1/4")	pk.50
SB9	9 mm CenterGuide	pk.50
SB95	9.5 mm (3/8")	pk.50
SB10	10 mm	pk.50
SB11	11 mm (7/16") CenterGuide	pk.50
SB11-100	11 mm (7/16") CenterGuide	pk.100
SB115	11.5 mm CenterGuide	pk.50
SB127	12.7 mm (1/2") CenterGuide	pk.50
SB17	17 mm CenterGuide	pk.50
SBS	for Shimadzu	pk.50

Premium Septa Silicone Pure

The Silicone Pure Septum was specifically created to combine significantly longer injection life, low bleed and low injection port adhesion. Usable to 340 °C inlet temperature.



Part No.	Description	Qty.
SS95	9.5 mm	pk.25
SS10	10 mm	pk.25
SS11	11 mm	pk.25
SS125	12.5 mm	pk.25
SS17	17 mm	pk.25
SSS	for Shimadzu	pk.25

BGB Electronic Leak Detector



Prevent small leaks from causing big problems with a BGB leak detector.

Features & Benefits include:

- Detects a broad range of gases.
- Audible tone and LED display indicate the severity of a leak.
- Can be operated during charging or used up to 12 hours between charges.
- Ergonomic, handheld design.
- Rugged side grips for added durability.
- Handy probe storage for cleanliness and convenience.
- Automatic shutoff.
- A convenient carrying and storage case.
- Easy-to-clean probe assembly.
- A universal charger set (CH, European, UK, U.S. and Australian plugs included).
- USB charging cable.
- Manual in German, English, French and Italian.



Accessories for BGB Electronic Leak Detector
www.bgb-shop.com/leak-detector-accessories

Part No.	Description	Qty.
33333-A	BGB Electronic Leak Detector	ea.

Leak Detector Specifications:

Detectable Gases:	Helium, Nitrogen, Argon, Carbon Dioxide, Hydrogen*	
Battery:	Rechargeable nickel-metal hydride (NiMH) battery (up to 12 hours normal operation)	
Ambient Temperature:	10–37 °C	
Humidity Range:	0–97 %	
Warranty:	One year	
Certifications:	CE (EU, Korea, Japan, Australia); UKCA; CSA/UL tested – not listed.	
Compliance:	WEEE, CEC, China RoHS 2	
Limits of Detection and	Helium, 1.0 x 10 ⁻⁵ , red LED	Hydrogen*, 1.0 x 10 ⁻⁵ , red LED
Indicating LED Color:	Nitrogen, 1.4 x 10 ⁻³ , yellow LED	Argon, 1.0 x 10 ⁻⁴ , yellow LED
	Carbon Dioxide, 1.0 x 10 ⁻⁴ , yellow LED	Gas detection limits measured in atm cc/sec.

Avoid using liquid leak detectors on a GC! Liquids can be drawn into the system and/or into the leak detector.


* CAUTION: This unit should only be used to detect trace amounts of hydrogen arising from a small leak in a nonflammable environment, e.g., laboratory room air, etc.

Vials and Accessories




Technical Information

Design of the Neck

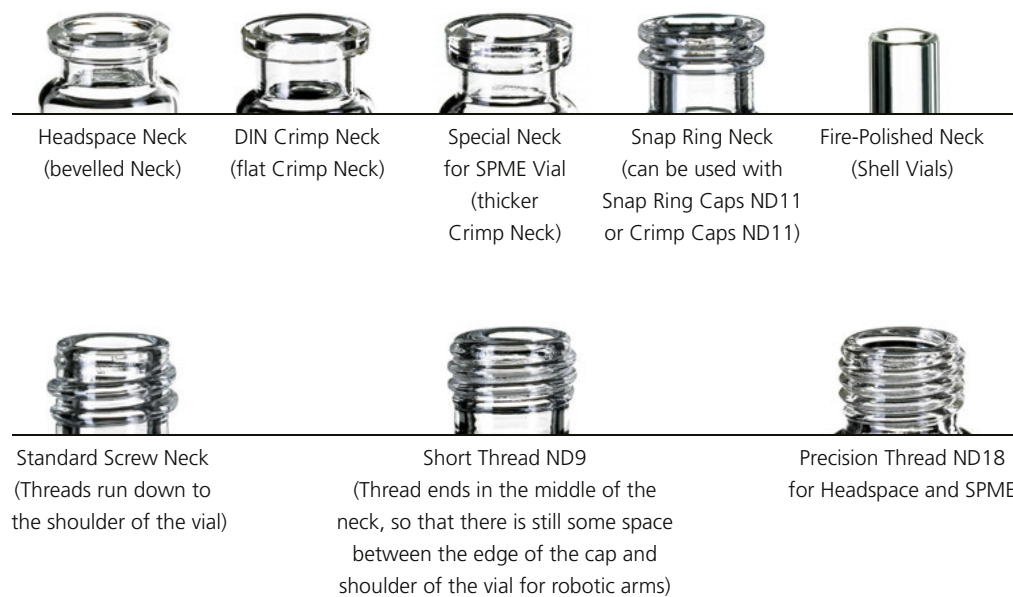

Design of the Bottom

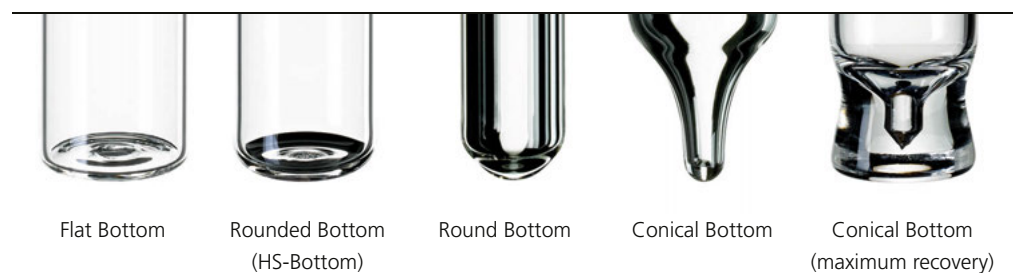

BGB can only guarantee that our caps, vials and inserts will perfectly fit together. For combination with parts from other manufacturers we can not give any guaranty.

Durometer (expressed in ° shore)

Durometer is the hardness of a liner and is expressed in ° shore. The higher the grade the harder the liner; the lower the grade, the softer the liner. The softest liner is 45° shore A and the hardest 70° shore A. Besides the thickness of a liner the hardness is an essential indication when deciding which liner is suitable for the penetration of a certain type of needle (fragile needles, thin or thick needles, sharp or dull needles, etc.)

Silanized

Silanized vials are used to reduce the adsorption of polar compounds onto the normally polar surface of the glass container. Some compounds like amino-acids, proteins or phenols tend to react with the OH-groups of the glass, even if – as is common for chromatography – 1st hydrolytic class glass is used. Through the silanization process the glass surface is deactivated and so possible reactions between the polar compounds and the glass are eliminated.

ND8 Crimp Neck Vials

Borosilicate glass – 1st hydrolytic class



Volume	0.7 ml	0.7 ml	0.6 ml	0.6 ml	0.4 ml
Dimension	40 x 7 mm	40 x 7 mm	40 x 7 mm	40 x 7 mm	30 x 7 mm
Glass Type	clear	amber	clear	amber	amber
Bottom	flat	flat	conical	conical	conical
Part No.	08040006	08040106	08040007	08040107	151142
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

Volume	1.2 ml	1.2 ml	0.8 ml	0.2 ml	0.3 ml
Dimension	40 x 8.2 mm	40 x 8.2 mm	30 x 8.2 mm	31.5 x 5.5 mm	31.5 x 5.5 mm
Glass Type	amber	clear	clear	clear	clear
Bottom	flat	flat	flat	conical	round
Part No.	08040105	08040005	08040009	0800030	0800035
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 Aluminium Crimp Caps

Septa	Natural Rubber/TEF	Silicone Rubber/PTFE	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE	Silicone/PTFE slitted	PTFE only
Part No.	080310-N	080310	080301	080302	080313	080304
Qty.	pk.1000	pk.1000	pk.100	pk.100	pk.100	pk.1000



BGB Crimper and Decapper
see page 49

ND11 Crimp Neck Vials

Borosilicate glass – 1st hydrolytic class



			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	wide	wide	wide
Miscellaneous	-	silanized	-
Part No.	11K	11KS	11B
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	amber	amber
Opening	wide	wide	wide
Labeling	label & filling lines	label & filling lines	label & filling lines
Miscellaneous	-	-	silanized
Part No.	11KW	11BW	11BWS
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	0.3 ml	0.3 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	narrow (5.3 mm)	-	-
Labeling	-	label	label
Miscellaneous	-	integrated insert base bonded	integrated insert base bonded
Part No.	110400	110420	110421
Qty.	pk.100	pk.100	pk.100



PP Vial Rack
200 x 105 x 17 mm
for Standard 1.5 ml Vials up to 12 mm OD
50 Positions
-
-
VR12
pk.5

ND11 Crimp Neck – Crimp/Snap Vials

Borosilicate glass – 1st hydrolytic class, Polypropylene (PP) or Polymethylpentene (TPX)



					
Volume	1.1 ml	0.7 ml	0.3 ml	0.3 ml	0.3 ml
Neck	Crimp	Crimp/Snap	Crimp/Snap	Crimp/Snap	Crimp/Snap
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Type	clear glass	clear PP	clear PP	amber PP	clear TPX
Miscellaneous	conical bottom	-	integrated insert	integrated insert	integrated insert
Part No.	110411	PPCV1107K	PPCV1103K	PPCV1103B	TPXCV1103K
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 Aluminium Crimp Caps with Septa Natural Rubber/TEF, Thickness 1.0 mm


			
Color	silver	blue	yellow
Part No.	11031201	11031201-BN	11031201-YN
Qty.	pk.1000	pk.1000	pk.1000

ND11 Aluminium Crimp Caps with Septa Silicone Rubber/PTFE, Thickness 1.0 mm

					
Color	silver	blue	red	green	yellow
Part No.	11031201-S	11031201-B	11031201-R	11031201-G	11031201-Y
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000



BGB Crimper and Decapper
see page 49




Glass Inserts for ND11 Vials
see page 31

ND11 Aluminium Crimp Caps with Septa Silicone/PTFE, Ultra Clean, Thickness 1.3 mm

					
Color	silver	blue	red	green	yellow
Part No.	11030101	11030101-B	11030101-R	11030101-G	11030101-Y
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 Aluminum or Magnetic Crimp Caps with different Septa

					
Material	Aluminum	Aluminum	Aluminum	Magnetic	Magnetic
Color	silver	silver	silver	yellow	yellow
Septa	PTFE/Silicone/PTFE	Silicone/PTFE X-slitted	PTFE only	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE
Part No.	11030201	11031301-X	11030401	11030101-M	11030201-M
Qty.	pk.100	pk.100	pk.1000	pk.100	pk.100



Vial Racks and Storage Boxes
see page 52

BGB Easy Grip Manual Crimper and Decapper

Our Easy Grip Manual Crimper and Decapper for all 8, 11, 13 and 20mm crimp caps. The curved handle features comfortable use compared to metal grip designs. The bottom-pull handle allows for a steadier hold than top-push handles. The adjustment knob is positioned at the head of the crimper to simplify adjustment of the crimp intensity.



Part No.	Description	Qty.
295000	8mm Crimper	ea.
295001	11 mm Crimper	ea.
295002	13 mm Crimper	ea.
295003	13 mm Crimper for Flip Off Caps	ea.
295004	20 mm Crimper	ea.
295005	20 mm Crimper for Flip Off Caps	ea.
295006	11 mm Decapper	ea.
295007	13 mm Decapper	ea.
295008	20 mm Decapper	ea.

Glass Inserts for ND11 Vials

Borosilicate glass – 1st hydrolytic class



for ND11 Wide Opening Vials

						
Volume	250 µl	250 µl	300 µl	350 µl	250 µl	250 µl
Dimension	31 x 6 mm	31 x 6 mm	31 x 6 mm	31 x 6 mm	29 x 5.7 mm	29 x 5.7 mm
Bottom	Conical	Conical	Conical	Flat	Conical	Conical
Miscellaneous	Tip: 15 mm	Tip: 15 mm silanized	Tip: 12 mm	-	with Plastic Spring	with Plastic Spring silanized
Part No.	110503	110503-S	110502	110506	110507	110507-S
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

for ND11 Narrow Opening Vials

						
Volume	150 µl	200 µl	260 µl	150 µl	110 µl	Metal Spring
Dimension	31 x 5 mm	31 x 5 mm	31 x 5 mm	29 x 5 mm	27.5 x 4 mm	36 x 5 mm
Bottom	Conical	Conical	Flat	Conical	Conical	-
Miscellaneous	Tip: 15 mm	Tip: 9 mm	-	with Plastic Spring	requires Spring 150614	for Insert 110504
Part No.	110500	110501	110505	110508	110504	150614
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

BGB Electronic Crimper and Decapper Model 6

Our new Electronic Crimpers and Decappers with enhanced OLED screen displays fit on standard laboratory vials and seals with aluminum or two-part aluminum/steel caps. The electronically adjustable cycle is accurate and reproducible and can be adjusted on the display of the unit. The tools are ergonomically designed to reduce strain and arm injury associated with many manual crimping tools.



Part No.	Description	Qty.
297040	8mm Crimper Model 6	ea.
297041	11 mm Crimper Model 6	ea.
297042	13mm Crimper Model 6	ea.
297043	13mm Crimper Model 6 for Flip Off Caps	ea.
297044	20mm Crimper Model 6	ea.
297045	20mm Crimper Model 6 for Flip Off Caps	ea.
297046	11 mm Decapper Model 6	ea.
297047	13mm Decapper Model 6	ea.
297048	20mm Decapper Model 6	ea.

ND11 Crimp/Snap Vials

Borosilicate glass – 1st hydrolytic class



Can be
used with
Crimp and
Snap Caps

Volume
Dimension
Glass Type
Opening
Labeling
Miscellaneous
Part No.
Qty.



1.5 ml
32 x 11.6 mm
clear
wide
-
-
11SR
pk.100



1.5 ml
32 x 11.6 mm
clear
wide
-
silanized
11SRS
pk.100



1.5 ml
32 x 11.6 mm
clear
wide
label & filling lines
-
11SRW
pk.100



Volume
Dimension
Glass Type
Opening
Labeling
Miscellaneous

1.5 ml
32 x 11.6 mm
amber
wide
label & filling lines
-
11SRBW
pk.100



1.5 ml
32 x 11.6 mm
amber
wide
label & filling lines
silanized
11SRBWS
pk.100



0.3 ml
32 x 11.6 mm
clear
-
-
integrated insert
base bonded
11KI
pk.100



0.3 ml
32 x 11.6 mm
amber
-
-
integrated insert
base bonded
11BI
pk.100



0.9 ml
32 x 11.6 mm
clear
wide
-
total Microliter
11K-ML
pk.100

ND11 Crimp/Snap Vials

PP (Polypropylene) or TPX (Polymethylpentene)

Volume
Dimension
Type
Miscellaneous
Part No.
Qty.



0.7 ml
32 x 11.6 mm
clear PP
-
PPCV1107K
pk.100



0.3 ml
32 x 11.6 mm
clear PP
integrated insert
PPCV1103K
pk.100



0.3 ml
32 x 11.6 mm
amber PP
integrated insert
PPCV1103B
pk.100



0.3 ml
32 x 11.6 mm
clear TPX
integrated insert
TPXCV1103K
pk.100



0.2 ml
32 x 11.6 mm
clear TPX
integrated glass insert
TPXCV1102
pk.100

ND11 PE Snap Ring Caps with Septa Natural Rubber/TEF, Thickness 1.0 mm

					
Color	transparent	blue	red	green	yellow
Part No.	SRC300-TN	SRC300-BN	SRC300-RN	SRC300-GN	SRC300-YN
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100


ND11 PE Snap Ring Caps with Septa Silicone/PTFE, Ultra Clean Thickness 1.3 mm

					
Color	transparent	blue	red	green	yellow
Part No.	SRC301-T	SRC301-B	SRC301-R	SRC301-G	SRC301-Y
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with X-slitted Septa Silicone/PTFE, Thickness 1.0 mm

				
Color	transparent	blue	red	green
Part No.	SRC313-T	SRC313-B	SRC313-R	SRC313-G
Qty.	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with Septa PTFE/Silicone/PTFE, Thickness 1.0 mm


					
Color	transparent	blue	red	green	yellow
Part No.	SRC302-T	SRC302-B	SRC302-R	SRC302-G	SRC302-Y
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

Continued on page 34.



Vial Racks and Storage Boxes
see page 52

ND11 PE Snap Ring Caps with Septa Silicone Rubber/PTFE, Thickness 1.0mm

		
Color	transparent	blue
Part No.	SRC300-T	SRC300-B
Qty.	pk.100	pk.100

Glass Inserts for ND11 Snap Ring Vials

Borosilicate glass - 1st hydrolytic class



						
Volume	250 µl	250 µl	300 µl	350 µl	250 µl	250 µl
Dimension	31 x 6 mm	31 x 6 mm	31 x 6 mm	31 x 6 mm	29 x 5.7 mm	29 x 5.7 mm
Bottom	Conical	Conical	Conical	Flat	Conical	Conical
Miscellaneous	Tip: 15 mm	Tip: 15 mm <i>silanized</i>	Tip: 12 mm		with Plastic Spring	with Plastic Spring <i>silanized</i>
Part No.	110503	110503-S	110502	110506	110507	110507-S
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100



ND8 (8-425) Screw Neck Vials

Borosilicate glass – 1st hydrolytic class



				
Volume	1.5 ml	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber	clear
Opening	narrow	narrow	narrow	narrow
Labeling	-	-	-	label & filling lines
Miscellaneous		silanized		
Part No.	080400	080400-S	080401	080400-W
Qty.	pk.100	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.1 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	amber	amber	clear
Opening	narrow	narrow	narrow
Labeling	label & filling lines	label & filling lines	-
Miscellaneous		silanized	conical bottom
Part No.	080401-W	080401-WS	080410
Qty.	pk.100	pk.100	pk.100



Glass Inserts for ND8 (8-425) Screw Neck Vials

Borosilicate glass – 1st hydrolytic class

						
Volume	150 µl	200 µl	260 µl	150 µl	110 µl	Metal Spring
Dimension	31 x 5 mm	31 x 5 mm	31 x 5 mm	29 x 5 mm	27.5 x 4 mm	36 x 5 mm
Bottom	Conical	Conical	Flat	Conical	Conical	-
Miscellaneous	Tip: 15 mm	Tip: 9 mm	-	with Plastic Spring	requires Spring 150614	for Insert 110504
Part No.	110500	110501	110505	110508	110504	150614
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 (8-425) PP Screw Caps, 5.5 mm Center Hole with Septa

					
Color	black	black	black	black	black
Septa	Natural Rubber/TEF	Silicone Rubber/PTFE	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE	Silicone/PTFE slitted
Part No.	070300	070300-SR	070301	070302	070313
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 (8-425) PP Screw Caps Center Hole and Closed Top without Septa

				
Color	black	white	black	white
Hole	5.5 mm	5.5 mm	without hole	without hole
Part No.	080800	080800-W	080801	080801-W
Qty.	pk.1000	pk.1000	pk.1000	pk.1000

Septa for ND8 (8-425) Screw Caps

							
Material	Natural Rubber/ TEF	Silicone Rubber/ PTFE	Silicone/PTFE (white/blue)	Silicone/PTFE (white/red)	PTFE/Silicone/ PTFE	Silicone/PTFE slitted	PTFE only
Thickness	1.3 mm	1.0 mm	1.1 mm	1.5 mm	1.0 mm	0.9 mm	0.25 mm thick
Part No.	080200	080200-SR	080201	080201-R	080202	080213	080204
Qty.	pk.1000	pk.1000	pk.100	pk.100	pk.100	pk.100	pk.1000



Vial Racks and Storage Boxes
see page 52

ND9 (9-425) Short Neck Screw Vials

Borosilicate glass – 1st hydrolytic class



			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	wide	wide	wide
Miscellaneous	-	silanized	-
Part No.	080400-XL	080400-XLS	080401-XL
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	amber	amber
Opening	wide	wide	wide
Labeling	label and filling lines	label and filling lines	label and filling lines
Miscellaneous	-	-	silanized
Part No.	080400-XLW	080401-XLW	080401-XLWS
Qty.	pk.100	pk.100	pk.100

					
Volume	0.3 ml	0.3 ml	0.7 ml	0.3 ml	0.3 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Type	clear glass	amber glass	clear PP *	clear PP	clear TPX
Labeling	label	label	-	-	-
Miscellaneous	integrated insert base bonded	integrated insert base bonded	-	integrated insert	integrated insert
Part No.	080420	080421	PPSV0907K	PPSV0903K	TPXSV0903K
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

* for Ion Chromatography

Inserts and Caps for ND9 Short Neck Screw Vials
see page 38 – 39

Glass Inserts for ND9 (9-425) Short Neck Screw Vials

Borosilicate glass – 1st hydrolytic class



						
Volume	250 µl	250 µl	300 µl	350 µl	250 µl	250 µl
Dimension	31 x 6 mm	31 x 6 mm	31 x 6 mm	31 x 6 mm	29 x 5.7 mm	29 x 5.7 mm
Bottom	Conical	Conical	Conical	Flat	Conical	Conical
Miscellaneous	Tip: 15 mm	Tip: 15 mm silanized	Tip: 12 mm	-	with Plastic Spring	with Plastic Spring silanized
Part No.	110503	110503-S	110502	110506	110507	110507-S
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Natural Rubber/TEF, Thickness 1.0 mm

						
Color	black	blue	red	green	yellow	transparent
Part No.	090300-N	090300-BN	090300-RN	090300-GN	090300-YN	090300-TN
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Silicone Rubber/PTFE, Thickness 1.0 mm

						
Color	black	blue	red	green	yellow	transparent
Part No.	090300	090300-B	090300-R	090300-G	090300-Y	090300-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Silicone/PTFE, Ultra Clean, Thickness 1.0 mm

						
Color	black	blue	red	green	yellow	transparent
Part No.	090301	090301-B	090301-R	090301-G	090301-Y	090301-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Silicone/PTFE, Ultra Clean, Thickness 1.0 mm

		45° shore A
		45° shore A
Color	orange	grey
Part No.	090301-BO	090301-BG
Qty.	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with slitted Septa Silicone/PTFE, Thickness 1.0 mm

		55° shore A				
		55° shore A				
		55° shore A				
		55° shore A				
		55° shore A				
		55° shore A				
Color	black	blue	red	green	yellow	transparent
Part No.	090313	090313-B	090313-R	090313-G	090313-Y	090313-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa PTFE/Silicone/PTFE, Thickness 1.0 mm

		45° shore A				
		45° shore A				
		45° shore A				
		45° shore A				
		45° shore A				
		45° shore A				
Color	black	blue	red	green	yellow	transparent
Part No.	090302	090302-B	090302-R	090302-G	090302-Y	090302-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa PTFE only, Thickness 0.2 mm

		53° shore D				
		53° shore D				
		53° shore D				
		53° shore D				
		53° shore D				
		53° shore D				
Color	black	blue	red	green	yellow	transparent
Part No.	090304	090304-B	090304-R	090304-G	090304-Y	090304-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100



Vial Racks and Storage Boxes
see page 52

ND13 (13-425) Screw Vials

Borosilicate glass – 1st hydrolytic class



				
Volume	4 ml	4 ml	4 ml	4 ml
Dimension	45 x 14.7 mm	45 x 14.7 mm	45 x 14.7 mm	45 x 14.7 mm
Glass Type	clear	amber	clear	amber
Labeling	-	-	label and filling lines	label and filling lines
Part No.	130400	130401	130400-W	130401-W
Qty.	pk.100	pk.100	pk.100	pk.100

		
Volume	Glass Insert 0.3 ml	Metal Spring
Dimension	40 x 6 mm	50 x 7.5 mm
Type	Tip 15 mm	-
Miscellaneous	requires Spring 150715	for Insert 150714
Part No.	150714	150715
Qty.	pk.100	pk.100


PP Vial Rack for Standard 4 ml Vials (230 x 117 x 28 mm) 50 Positions
VR15
pk.5


Storagebox for 15 mm OD Vials (130 x 130 x 52 mm) 49 Positions
PPSB15-R
ea.



More Vial Racks and Storage Boxes
see page 52

ND13 (13-425) PP Screw Caps, 8.5 mm Center Hole with Septa

				
Color	black	black	black	black
Septa	Natural Rubber/TEF	Silicone/PTFE	PTFE/Silicone/PTFE	cross-slitted Silicone/PTFE
Thickness	1.3 mm	1.5 mm	1.0 mm	1.5 mm
Part No.	120300	120301	120302	120313
Qty.	pk.100	pk.100	pk.100	pk.100

ND13 (13-425) PP Screw Caps, 8.5 mm Center Hole and Closed Top without Septa

				
Color	black	black	white	white
Hole	8.5 mm	without hole	8.5 mm	without hole
Part No.	130800	130801	130800-W	130801-W
Qty.	pk.1000	pk.1000	pk.1000	pk.1000

Septa for ND13 (13-425) Screw Caps

					
Material	Natural Rubber/TEF	Silicone/PTFE	PTFE/Silicone/PTFE	Silicone/PTFE	PTFE only
Thickness	1.3 mm	1.5 mm	1.0 mm	1.5 mm	0.25 mm
Part No.	120200	120201	120202	120213	120204
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000

ND18 Headspace Screw Vials

Borosilicate glass – 1st hydrolytic class



for CTC-
Autosamplers

				
				
Volume	20 ml	20 ml	10 ml	10 ml
Dimension	75.5 x 22.5 mm	75.5 x 22.5 mm	46 x 22.5 mm	46 x 22.5 mm
Glass Type	clear	amber	clear	amber
Bottom	rounded	rounded	rounded	rounded
Part No.	180420	180420-B	180410	180410-B
Qty.	pk.100	pk.100	pk.100	pk.100

ND20 Headspace Crimp Vials

Borosilicate glass – 1st hydrolytic class

for CTC-
Autosamplers

					
					
Volume	20 ml	20 ml	10 ml	10 ml	20 ml SPME
Dimension	75.5 x 22.5 mm	75.5 x 22.5 mm	46 x 22.5 mm	46 x 22.5 mm	75.5 x 22.5 mm
Glass Type	clear	amber	clear	amber	clear
Bottom	rounded	rounded	rounded	rounded	rounded
Miscellaneous	-	-	-	-	with special crimp neck
Part No.	200420-CTC	200420-CTC-B	200410-CTC	200410-CTC-B	200420-CTC-SPME
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

						
Volume	20 ml	10 ml	20 ml	20 ml	20 ml	5 ml
Dimension	75.5 x 22.5 mm	46 x 22.5 mm	75.5 x 23 mm	75.5 x 23 mm	75.5 x 23 mm	38.2 x 22 mm
Glass Type	clear	clear	clear	clear	amber	clear
Bottom	flat	flat	rounded	rounded	rounded	rounded
Labeling	-	-	-	with label and filling lines	-	-
Miscellaneous	with long DIN crimp neck	with long DIN crimp neck	-	-	-	-
Part No.	200420-FF	200410-FF	200420	200421	200420-B	200406
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100


ND18 Magnetic Screw Caps, 8 mm Center Hole with Septa

						
Septa	Butyl/PTFE	Silicone/PTFE (blue/white)	Silicone/PTFE (white/blue)	Silicone/PTFE (white/red)	Silicone/Aluminum (white/alu)	Silicone/PTFE Ultra High Temperature
Thickness	1.6 mm	1.3 mm	1.5 mm	1.3 mm	1.3 mm	3.0 mm
Part No.	180300	180301	180305	180306	180307	180308
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Aluminium Crimp Caps, 10 mm Center Hole with Septa

					
Septa	Butyl	Butyl/PTFE	«Parma-Fix»	Silicone/PTFE	Silicone/Aluminum
Part No.	20030000	20030100	20030300	20030500	20030700
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Magnetic Crimp Caps, 5 mm Center Hole with Septa

					
Septa	Butyl	Butyl/PTFE	«Parma-Fix»	Silicone/PTFE	Silicone/Aluminum
Part No.	20030004	20030104	20030304	20030504	20030704
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Magnetic Crimp Caps, 8 mm Center Hole with Septa

						
Septa	Butyl Septa	Butyl/PTFE Septa	«Pharma Fix» Septa	Silicone/PTFE Septa	Butyl/PTFE Septa	Silicone/PTFE Septa
Part No.	20030004-SPME	20030104-SPME	20030304-SPME	20030504-SPME	20030104-BIR	20030504-BIR
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Magnetic Caps with Silicone/PTFE SPME MicroCenter Septa

		
Description	ND18 Magnetic Screw Cap	ND20 Magnetic Crimp Cap
Septa	Silicone/PTFE SPME MicroCenter Septa	Silicone/PTFE SPME MicroCenter Septa
Part No.	180315	20031504-SPME
Qty.	pk.100	pk.100

Shell Vials

Borosilicate glass – 1st hydrolytic class



						
	Best Seller					
Volume	1 ml	1 ml	2 ml	2 ml	4 ml	4 ml
Dimension	40 x 8.2 mm	40 x 8.2 mm	31.5 x 11.6 mm	31.5 x 11.6 mm	44.6 x 14.65 mm	44.6 x 14.65 mm
Glass Type	clear	amber	clear	amber	clear	amber
Miscellaneous	PE Plug	PE Plug	PE Plug	PE Plug	PE Plug	PE Plug
Part No.	SV1ML	SV1MLB	SV2ML	SV2MLB	SV4ML	SV4MLB
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Sample Storage Screw Vials and EPA Sample Storage Screw Vials

Borosilicate glass – 1st hydrolytic class

						
Volume	1.5 ml	1.5 ml	4 ml	4 ml	8 ml	8 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	45 x 14.7 mm	45 x 14.7 mm	61 x 16.6 mm	61 x 16.6 mm
Glass Type	clear	amber	clear	amber	clear	amber
Thread	8-425	8-425	13-425	13-425	15-425	15-425
Part No.	SF2	SF2-B	SF4	SF4-B	SF8	SF8-B
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

						
Volume	12 ml	12 ml	16 ml	20 ml	20 ml EPA	20 ml EPA
Dimension	66 x 18.5 mm	66 x 18.5 mm	71 x 20.6 mm	86 x 22.5 mm	57 x 27.5 mm	57 x 27.5 mm
Glass Type	clear	amber	clear	clear	clear	amber
Thread	15-425	15-425	18-400	20-400	24-400	24-400
Part No.	SF12	SF12-B	SF16	SF20	EPA20	EPA20-B
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

EPA Sample Storage Screw Vials

Borosilicate glass – 1st hydrolytic class



Volume
Dimension
Glass Type
Thread
Part No.
Qty.



30 ml EPA
72.5 x 27.5 mm
clear
24-400
EPA30
pk.100



30 ml EPA
72.5 x 27.5 mm
amber
24-400
EPA30-B
pk.100



40 ml EPA
95 x 27.5 mm
clear
24-400
EPA40
pk.100



40 ml EPA
95 x 27.5 mm
amber
24-400
EPA40-B
pk.100



60 ml EPA
140 x 27.5 mm
clear
24-400
EPA60
pk.100



60 ml EPA
140 x 27.5 mm
amber
24-400
EPA60-B
pk.100



Volume
Dimension
Glass Type
Thread
Part No.
Qty.



EcoLine
Made in China

30 ml EPA
72.5 x 27.5 mm
clear
24-400
EPA30A
pk.100



EcoLine
Made in China

30 ml EPA
72.5 x 27.5 mm
amber
24-400
EPA30A-B
pk.100



EcoLine
Made in China

40 ml EPA
95 x 27.5 mm
clear
24-400
EPA40A
pk.100



EcoLine
Made in China

40 ml EPA
95 x 27.5 mm
amber
24-400
EPA40A-B
pk.100



EcoLine
Made in China

60 ml EPA
140 x 27.5 mm
clear
24-400
EPA60A
pk.100



EcoLine
Made in China

60 ml EPA
140 x 27.5 mm
amber
24-400
EPA60A-B
pk.100

PP Screw Caps Closed Top with Septa Butyl/PTFE, Thickness 1.3 mm

						
						
	55° shore A	55° shore A	55° shore A	55° shore A	55° shore A	55° shore A
Color	black	black	black	black	white	white
Thread	8-425	13-425	15-425	18-400	20-400	24-400
Part No.	SV-8-425	SV-13-425	SV-15-425	SV-18-400	SV-20-400	SV-24-400
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Screw Caps Closed Top white with Septa PTFE/PE Foam Liner, Thickness 1.3 mm

					
					
Cap Material	Urethane	PP	PP	PP	PP
Thread	13-425	15-425	18-400	20-400	24-400
Part No.	SV-13-425-P	SV-15-425-P	SV-18-400-P	SV-20-400-P	SV-24-400-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

EPA ND24 PP Screw Caps with 12.5 mm Center Hole and Septa

			
			
	45° shore A		45° shore A
Color	white	white, for EPA Vials	EPA Septa
Thread	24-400	24-400	-
Septa	Silicone/PTFE	without Septa	Silicone/PTFE
Thickness	3.2 mm		3.2 mm
Part No.	SV-EPA	SV-EPA-CAP	SV-EPA-SEPTA
Qty.	pk.100	pk.100	pk.100

Urea Screw Caps Closed Top green with PE Foam/PTFE Liner

- Wide range of chemical compatibility
- Most temperature tolerant of plastic closures

Thread				
Part No.	QP-272635	QP-272632	QP-272633	QP-272634
Qty.	pk.100	pk.100	pk.100	pk.100

Thread			
Part No.	QP-272626	QP-272627	QP-272628
Qty.	pk.100	pk.100	pk.100

Ribbed PP Cap Closed Top white with PE Foam/PTFE Liner



- Economical alternative to Urea and Phenolic PTFE lined caps.
- Very resilient with strong chemical and moisture resistance.

Thread			
Part No.	QP-328904	QP-262535	QP-239071
Qty.	pk.100	pk.100	pk.100


Thread		
Part No.	QP-239075	QP-239077
Qty.	pk.100	pk.100



PP Storage Box
for 28mm OD EPA Vials
(130 x 130 x 80 mm)
16 Positions
PPSB28A-V
ea.

Mini Reaction Vials with Open Hole Screw Cap and PTFE/Silicone Septa

Borosilicate glass

					
Volume	10 ml	10 ml	5 ml	3 ml	1 ml
Glass Type	clear	amber	clear	clear	clear
Thread	20-400	20-400	20-400	20-400	13-425
Specifications	Vial OD: ~22.3 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~84.1 mm Heigh w/o Cap: ~80.8 mm	Vial OD: ~22.3 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~84.1 mm Heigh w/o Cap: ~80.8 mm	Vial OD: ~19.5 mm Vial Opening ID: ~13.2 mm Heigh w. Cap: ~63.8 mm Heigh w/o Cap: ~60.3 mm	Vial OD: ~20.5 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~52.0 mm Heigh w/o Cap: ~48.4 mm	Vial OD: ~12.5 mm Vial Opening ID: ~7.8 mm Heigh w. Cap: ~48.5 mm Heigh w/o Cap: ~45.3 mm
Part No.	MRV-10	MRVA-10	MRV-5	MRV-3	MRV-1
Qty.	pk.12	pk.12	pk.12	pk.12	pk.12

Mininert® Valves Screw Caps

- Temperature: The valves can be used up to 40°C (105°F). Note: After use at high temperatures, the valve may leak slightly when cooled down.
- Pressure: Valves can be used up to 8 bar (120 psi). Note: Pressurization of glass vials can be extremely dangerous and is not recommended.

					
Thread	24-400	20-400	18-400	15-425	13-425
Part No.	MV-24T	MV-20T	MV-18T	MV-15T	MV-13T
Qty.	pk.12	pk.12	pk.12	pk.12	pk.12

Screw Caps Open Hole with Septa Silicone/PTFE for Mini Reaction Vials

		
Color	black	black
Thread	20-400 for MRV-3, MRV-5, MRV-10	13-425 for MRV-1
Part No.	MRV-CS2	MRV-CS1
Qty.	pk.48	pk.48

Specifications for Screw Caps:

- Black Phenolic Cap: max. Temp. 149°C
- PTFE/Silicone Septa: max. Temp. 250°C

Note: Be aware that using the caps in combination with reaction vials at elevated temperatures can increase the internal pressure. Maximum working temperatures might be affected and working temperatures are decreased.



Syringes

see page 93

BGB Easy Grip Manual Crimper and Decapper

Our Easy Grip Manual Crimper and Decapper for all 8, 11, 13 and 20 mm crimp caps. The curved handle features comfortable use compared to metal grip designs. The bottom-pull handle allows for a steadier hold than top-push handles.



An easily-viewed adjustment knob is located at the head of the crimper and decapper. The clearly shown + and - symbols along with the directional arrows, simplify adjusting the intensity of the crimp or decap needed. The knob is also designed to indicate when the crimp setting has been reached, when it fully contacts the body of the crimper/decapper.



All Easy Grip Manual Crimper and Decapper are equipped with an adjustment knob.



Best Seller

Part No.	Description	Qty.
295000	8 mm Crimper	ea.
295001	11 mm Crimper	ea.
295002	13 mm Crimper	ea.
295003	13 mm Crimper for Flip Off Caps	ea.
295004	20 mm Crimper	ea.
295005	20 mm Crimper for Flip Off Caps	ea.
295006	11 mm Decapper	ea.
295007	13 mm Decapper	ea.
295008	20 mm Decapper	ea.



Easy to use.



BGB Classic Manual Crimper and Decapper

- Chemically resistant surface finish especially designed for the application in the labs.
- Hardened crimping jaws made of special alloy that guarantees long life
- Adjustable in crimping pressure limitation by a screw in the handle
- Additionally 11 mm, 13 mm and 20 mm crimpers are adjustable in crimping height by screwing up or down the pressure block in the crimping head with a hexagon key.



Part No.	Description	Qty.
295020	8 mm Crimper	ea.
295021	11 mm Adjustable Crimper	ea.
295022	13 mm Adjustable Crimper	ea.
295023	13 mm Adjustable Crimper for Flip Off Caps	ea.
295024	20 mm Adjustable Crimper	ea.
295025	20 mm Adjustable Crimper for Flip Off Caps	ea.
295026	8 mm Decapper	ea.
295027	11 mm Decapper	ea.
295028	13 mm Decapper	ea.
295029	20 mm Decapper	ea.

BGB Electronic Crimper and Decapper Model 6



Our new Electronic Crimpers and Decappers with enhanced OLED screen displays fit on standard laboratory vials and seals with aluminum caps. The electronically adjustable cycle is accurate and reproducible and can be adjusted on the display of the unit. The tools are ergonomically designed to reduce strain and arm injury associated with many manual crimping tools.

- Powerful motor with fast cycle
- Longer lasting battery with Lithium Ion technology
- Advanced charging system including warning light when recharging is necessary
- Can be operated while charging
- Controls on top of unit with enhanced OLED Screen

Note: Not suitable for all-steel or magnetic ring crimp caps, please use High Power Electronic Crimping Tool (see page 51) for this type of caps.




OLED screen display



Easy to use.



Part No.	Description	Qty.
297040	8 mm Crimper Model 6	ea.
297041	11 mm Crimper Model 6	ea.
297042	13 mm Crimper Model 6	ea.
297043	13 mm Crimper Model 6 for Flip Off Caps	ea.
297044	20 mm Crimper Model 6	ea.
297045	20 mm Crimper Model 6 for Flip Off Caps	ea.
297046	11 mm Decapper Model 6	ea.
297047	13 mm Decapper Model 6	ea.
297048	20 mm Decapper Model 6	ea.

BGB Crimping Tool Stand

Stand for BGB Electronic and Easy Grip Manual Crimpers and Decappers.






Examples of use.

Part No.	Description	Qty.
295080	Crimping Tool Stand	ea.

BGB High Power Electronic Crimping Tool HPS Model 6

The High Power Electronic Crimping Tool with new OLED screen display is faster and more powerful than the electronic crimping tool. The HPS crimping tool is designed to store separate programs for different caps and seals. It is powered by a universal power supply and uses interchangeable jaw sets. Jaw sets are strong enough to crimp all steel and magnetic caps.

- High-Power version of electronic crimping tool with fixed power supply and cord (no battery).
- Uses interchangeable jaw sets.
- Stores separate programs for different caps and seals.
- Strong enough for all steel and magnetic caps.
- Optional base with mounting kit.



OLED screen display

Part No.	Description	Qty.
297060	High Power Electr. Crimping Tool Model 6	ea.



High Power Electronic Crimping Tool is not included.

Part No.	Description	Qty.
295061	Base with Mounting Kit	ea.

Jaw Sets for BGB High Power Electronic Crimping Tool HPS

						
Dimension Tool	8mm Crimper	11mm Crimper	13mm Crimper	13mm Crimper for Flip Off Caps	20mm Crimper	20mm Crimper for Flip Off Caps
Part No.	295062	295063	295064	295065	295066	295067
Qty.	ea.	ea.	ea.	ea.	ea.	ea.

			
Dimension Tool	11mm Decapper	13mm Decapper	20mm Decapper
Part No.	295068	295069	295070
Qty.	ea.	ea.	ea.



Jaw Sets are easy to change. Simply insert the jaw set into the bushing at the bottom of the tool. Push up and twist until the set locks into position.
To remove, push the outside button and rotate.

PP Vial Racks



Application
Dimensions
Positions
Part No.
Qty.

For Standard 1.5 ml Vials up to 12 mm OD
200 x 105 x 17 mm
50
VR12
pk.5



For Standard 4 ml Vials up to 15 mm OD
230 x 117 x 28 mm
50
VR15
pk.5

PP Storage Boxes



Application
Dimensions
Positions
Color
Part No.
Qty.

for 12 mm OD Vials
130 x 130 x 45 mm
81
blue
PPSB12-B
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
orange
PPSB12-O
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
pink
PPSB12-P
ea.




for 12 mm OD Vials
130 x 130 x 45 mm
81
yellow
PPSB12-Y
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
green
PPSB12-G
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
transparent
PPSB12-T
ea.



Application
Dimensions
Positions
Color
Part No.
Qty.

for 15 mm OD Vials
130 x 130 x 52 mm
49
red
PPSB15-R
ea.



for 24 mm OD Vials
130 x 130 x 102 mm
25
blue
PPSB24-B
ea.



for 28 mm OD EPA Vials
130 x 130 x 80 mm
16
violett
PPSB28A-V
ea.




for 28 mm OD EPA Vials
130 x 130 x 105 mm
10
violett
PPSB28B-V
ea.



For Vials
see page 26–45

BGB Filter Vials

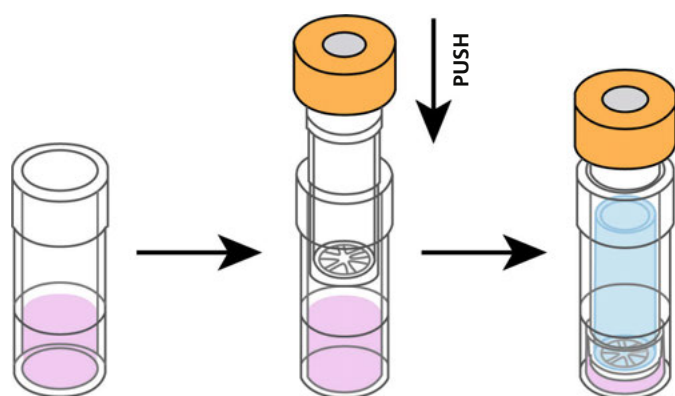

Filter vials provide an efficient, single-step filtering sample preparation process that quickly and easily cleans up your samples. They increase sample integrity by retaining the complete sample inside the vial. The filter vials are compatible with most autosamplers; pre-slitted caps ensure that the autosampler needle can easily penetrate the vial. Filter vials are easy to press and can be used with a Multi-Vial Compressor System or manually.

Filter vials are an all-in-one filtration product that reduces waste by replacing the disposable syringes, syringe filters, glass vials and caps of the classic sample preparation process. They are available with 0.20µm and 0.45µm nylon, PES, PTFE, PVDF and regenerated cellulose (RC) membrane filters.

- For high-throughput chromatographic analysis
- Vial dimensions 32mm x 12mm (height x diameter)
- Polypropylene housing and piston
- Pre-slitted PP cap with PTFE/silicone septa
- 480µL max. fill volume
- 30µL dead volume
- 50°C (120°F) max. operating temperature
- 0.6bar (8psi) compression force



Pre-slitted PP cap with PTFE/silicone septa

								
Dimension	32 x 12mm		32 x 12mm		32 x 12mm		32 x 12mm	
Membrane	Nylon		Nylon		PES		PES	
Pore Size	0.20 µm		0.45 µm		0.20 µm		0.45 µm	
Part No.	FV03-1		FV03-2		FV07-1		FV07-2	
Qty.	pk.100		pk.100		pk.100		pk.100	



Pre-slitted PP cap with PTFE/silicone septa

Dimension
Membrane
Pore Size
Part No.
Qty.



32 x 12mm
PTFE
0.20 μ m
FV04-1
pk.100



32 x 12mm
PTFE
0.45 μ m
FV04-2
pk.100



32 x 12mm
PVDF
0.20 μ m
FV05-1
pk.100



32 x 12mm
PVDF
0.45 μ m
FV05-2
pk.100

Dimension
Membrane
Pore Size
Part No.
Qty.



32 x 12mm
RC
0.20 μ m
FV01-1
pk.100



32 x 12mm
RC
0.45 μ m
FV01-2
pk.100

Filtration

High Quality Syringe Filters



Triple Filter



Housing	Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Membrane Diameter	25 mm	13 mm	25 mm
Membrane Layer	1 Layer	1 Layer	3 Layers: Membrane + 10 µm/1 µm Graded Prefilter + 0.7 µm Glass Fiber
Housing Diameter	33 mm	18 mm	33 mm
Filtration Area	4.6 cm ²	0.76 cm ²	4.6 cm ²
Holdup Volume	<100 µl	<50 µl	<80 µl
Sample Volume	<100 ml	<10 ml	<100 µl
Inlet Connection	Luer Lock Female	Luer Lock Female	Luer Lock Female
Outlet Connection	Luer Tip Male	Luer Tip Male	Luer Tip Male
Max. Operating Pressure	5.51 bar (80 psi)	5.51 bar (80 psi)	5.17 bar (75 psi)
Max. Temperature	90 °C (194 ° F)	90 °C (194 ° F)	90 °C (194 ° F)
Sterile	No	No	No

Membrane

Nylon

(Polyamide)

Part No.	Diameter	Pore Size	Qty.
SF2503-1A	25 mm	0.22 µm	pk.100
SF2503-2A	25 mm	0.45 µm	pk.100
SF1303-1A	13 mm	0.22 µm	pk.100
SF1303-2A	13 mm	0.45 µm	pk.100

Triple Filter

Nylon

(Polyamide)

SF2503-1A3	25 mm	0.22 µm	pk.100
SF2503-2A3	25 mm	0.45 µm	pk.100

PTFE – Hydrophobic

(Polytetrafluoroethylene)

SF2504-1A	25 mm	0.22 µm	pk.100
SF2504-2A	25 mm	0.45 µm	pk.100
SF1304-1A	13 mm	0.22 µm	pk.100
SF1304-2A	13 mm	0.45 µm	pk.100

Triple Filter

PTFE – Hydrophobic

(Polytetrafluoroethylene)

SF2504-1A3	25 mm	0.22 µm	pk.100
SF2504-2A3	25 mm	0.45 µm	pk.100

PTFE – Hydrophilic

(Polytetrafluoroethylene)

SF2509-1A	25 mm	0.22 µm	pk.100
SF2509-2A	25 mm	0.45 µm	pk.100
SF1309-1A	13 mm	0.22 µm	pk.100
SF1309-2A	13 mm	0.45 µm	pk.100

Triple Filter

PTFE – Hydrophilic

(Polytetrafluoroethylene)

SF2509-1A3	25 mm	0.22 µm	pk.100
SF2509-2A3	25 mm	0.45 µm	pk.100

PE

(Polyethylene)

SF2506-1A	25 mm	0.22 µm	pk.100
SF2506-2A	25 mm	0.50 µm	pk.100
SF1306-1A	13 mm	0.22 µm	pk.100
SF1306-2A	13 mm	0.50 µm	pk.100

Membrane Chemical Compatibility Chart

https://www.bgb-info.com/files/Filter_Comp_Chart.pdf

Membrane	Part No.	Diameter	Pore Size	Qty.
PVDF (Polyvinylidene Fluoride)	SF2505-1A	25 mm	0.22 µm	pk.100
	SF2505-2A	25 mm	0.45 µm	pk.100
	SF1305-1A	13 mm	0.22 µm	pk.100
	SF1305-2A	13 mm	0.45 µm	pk.100
Triple Filter PVDF (Polyvinylidene Fluoride)	SF2505-1A3	25 mm	0.22 µm	pk.100
	SF2505-2A3	25 mm	0.45 µm	pk.100
PES (Polyethersulfone)	SF2507-1A	25 mm	0.22 µm	pk.100
	SF2507-2A	25 mm	0.45 µm	pk.100
	SF1307-1A	13 mm	0.22 µm	pk.100
	SF1307-2A	13 mm	0.45 µm	pk.100
Triple Filter PES (Polyethersulfone)	SF2507-1A3	25 mm	0.22 µm	pk.100
	SF2507-2A3	25 mm	0.45 µm	pk.100
Triple Filter CA (Cellulose Acetate)	SF2502-1A3	25 mm	0.22 µm	pk.100
	SF2502-2A3	25 mm	0.45 µm	pk.100
GF (Glass Fiber)	SF2500-07A	25 mm	0.70 µm	pk.100
	SF2500-10A	25 mm	1.00 µm	pk.100
	SF2500-12A	25 mm	1.20 µm	pk.100
	SF2500-31A	25 mm	3.10 µm	pk.100
RC (Regenerated Cellulose)	SF2501-1A	25 mm	0.22 µm	pk.100
	SF2501-2A	25 mm	0.45 µm	pk.100
	SF1301-1A	13 mm	0.22 µm	pk.100
	SF1301-2A	13 mm	0.45 µm	pk.100



HPLC Certified Plastic Disposable Syringes
see page 58

			
Housing	Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Diameter	30 mm	25 mm	17 mm
Filtration Area	4.91 cm ²	3.7 cm ²	1.33 cm ²
Holdup Volume	<137 µl	<100 µl	<29 µl
Sample Volume	<100 ml	<100 ml	<10 ml
Inlet Connection	Luer Lock Female	Luer Lock Female	Luer Lock Female
Outlet Connection	Luer Tip Male	Luer Tip Male	Luer Tip Male
Max. Operating Pressure	6.2 bar (90 psi)	5 bar (72 psi)	7.9 bar (115 psi)

30 mm

				
Color	blue	yellow	grey	brown
Membrane	PTFE/ Glass Fiber Prefilter	PTFE/ Glass Fiber Prefilter	Regenerated Cellulose (RC)/ Glass Fiber Prefilter	Regenerated Cellulose (RC)/ Glass Fiber Prefilter
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm
Miscellaneous	Hydrophobic	Hydrophobic	Hydrophilic	Hydrophilic
Part No.	30162086	30162087	30162088	30162089
Qty.	pk.100	pk.100	pk.100	pk.100

30 mm

					
Color	purple	green	black	red	orange
Membrane	Nylon (PA)/ Glass Fiber Prefilter	Nylon (PA)/ Glass Fiber Prefilter	PVDF/ Glass Fiber Prefilter	PVDF	Glass Fiber
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm	1.2 µm
Miscellaneous	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic
Part No.	30162090	30162091	30162092	30162093	30162094
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

25 mm

						
Color	green	natural	blue	yellow	bright blue	bright green
Membrane	PTFE	PTFE	reg. Cellulose (RC)	reg. Cellulose (RC)	Nylon (PA)	Nylon (PA)
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm	0.20 µm	0.45 µm
Miscellaneous	Hydrophobic	Hydrophobic	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic
Part No.	25160346	25160347	25160348	25160349	25160350	25160351
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

17 mm

Color
Membrane
Pore Size
Miscellaneous

Part No.
Qty.



blue
PTFE
0.20 µm
Hydrophobic
17162076
pk.100



yellow
PTFE
0.45 µm
Hydrophobic
17162077
pk.100



grey
Regenerated Cellulose (RC)
0.20 µm
Hydrophilic
17162078
pk.100



brown
Regenerated Cellulose (RC)
0.45 µm
Hydrophilic
17162079
pk.100

17 mm

Color
Membrane
Pore Size
Miscellaneous

Part No.
Qty.



purple
Nylon (PA)
0.20 µm
Hydrophilic
17162080
pk.100



green
Nylon (PA)
0.45 µm
Hydrophilic
17162081
pk.100



black
PVDF/Glass Fiber Prefilter
0.20 µm
Hydrophilic
17162082
pk.100



red
PVDF/Glass Fiber Prefilter
0.45 µm
Hydrophilic
17162083
pk.100

Disposable Plastic Syringes

Polypropylene (PP), HPLC Certified

with
Luer Tip

Volume
Connector

Part No.
Qty.



2 ml
Luer Tip
PP-EWS-2L
pk.100



5 ml
Luer Tip
PP-EWS-5L
pk.100



10 ml
Luer Tip
PP-EWS-10L
pk.100



20 ml
Luer Tip
PP-EWS-20L
pk.100

with
Luer Lock

Volume
Connector

Part No.
Qty.




2 ml
Luer Lock Tip
PP-EWS-2LL
pk.100



5 ml
Luer Lock Tip
PP-EWS-5LL
pk.100



10 ml
Luer Lock Tip
PP-EWS-10LL
pk.100



20 ml
Luer Lock Tip
PP-EWS-20LL
pk.100

Spin Filters

Maxi Spin Filter, non sterile
25 ml capacity, with 50 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMAXCA02	CA	0.20 µm	pk.50
SPFMAXCA45	CA	0.45 µm	pk.50
SPFMAXNC02	NC	0.20 µm	pk.50
SPFMAXNC45	NC	0.45 µm	pk.50
SPFMAXNL02	Nylon	0.20 µm	pk.50
SPFMAXNL45	Nylon	0.45 µm	pk.50
SPFMAXPS02	PES	0.20 µm	pk.50
SPFMAXPS45	PES	0.45 µm	pk.50
SPFMAXPP02	PP	0.20 µm	pk.50
SPFMAXPP45	PP	0.45 µm	pk.50
SPFMAXPT02	PTFE	0.20 µm	pk.50
SPFMAXPT45	PTFE	0.45 µm	pk.50
SPFMAXPV02	PVDF	0.20 µm	pk.50
SPFMAXPV45	PVDF	0.45 µm	pk.50
SPFMAXRC02	RC	0.20 µm	pk.50
SPFMAXRC45	RC	0.45 µm	pk.50

Midi Spin Filter, non sterile
4 ml capacity, with 7 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMIDCA02	CA	0.20 µm	pk.25
SPFMIDCA45	CA	0.45 µm	pk.25
SPFMIDNC02	NC	0.20 µm	pk.25
SPFMIDNC45	NC	0.45 µm	pk.25
SPFMIDNL02	Nylon	0.20 µm	pk.25
SPFMIDNL45	Nylon	0.45 µm	pk.25
SPFMIDPS02	PES	0.20 µm	pk.25
SPFMIDPS45	PES	0.45 µm	pk.25
SPFMIDPP02	PP	0.20 µm	pk.25
SPFMIDPP45	PP	0.45 µm	pk.25
SPFMIDPT02	PTFE	0.20 µm	pk.25
SPFMIDPT45	PTFE	0.45 µm	pk.25
SPFMIDPV02	PVDF	0.20 µm	pk.25
SPFMIDPV45	PVDF	0.45 µm	pk.25
SPFMIDRC02	RC	0.20 µm	pk.25
SPFMIDRC45	RC	0.45 µm	pk.25

Spin Filters

New

Micro Spin Filter, non sterile

800 µl capacity, with 2.0 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMICCA02	CA	0.20 µm	pk.100
SPFMICCA45	CA	0.45 µm	pk.100
SPFMICNC02	NC	0.20 µm	pk.100
SPFMICNC45	NC	0.45 µm	pk.100
SPFMICNL02	Nylon	0.20 µm	pk.100
SPFMICNL45	Nylon	0.45 µm	pk.100
SPFMICPS02	PES	0.20 µm	pk.100
SPFMICPS45	PES	0.45 µm	pk.100
SPFMICPP02	PP	0.20 µm	pk.100
SPFMICPP45	PP	0.45 µm	pk.100
SPFMICPT02	PTFE	0.20 µm	pk.100
SPFMICPT45	PTFE	0.45 µm	pk.100
SPFMICPV02	PVDF	0.20 µm	pk.100
SPFMICPV45	PVDF	0.45 µm	pk.100
SPFMICRC02	RC	0.20 µm	pk.100
SPFMICRC45	RC	0.45 µm	pk.100

Nano Spin Filter, non sterile

400 µl capacity, with 2.0 ml capples receiver tube

New




Part No.	Membrane	Pore Size	Qty.
SPFNANCA02	CA	0.20 µm	pk.100
SPFNANCA45	CA	0.45 µm	pk.100
SPFNANNC02	NC	0.20 µm	pk.100
SPFNANNC45	NC	0.45 µm	pk.100
SPFNANNL02	Nylon	0.20 µm	pk.100
SPFNANNL45	Nylon	0.45 µm	pk.100
SPFNANPS02	PES	0.20 µm	pk.100
SPFNANPS45	PES	0.45 µm	pk.100
SPFNANPP02	PP	0.20 µm	pk.100
SPFNANPP45	PP	0.45 µm	pk.100
SPFNANPT02	PTFE	0.20 µm	pk.100
SPFNANPT45	PTFE	0.45 µm	pk.100
SPFNANPV02	PVDF	0.20 µm	pk.100
SPFNANPV45	PVDF	0.45 µm	pk.100
SPFNANRC02	RC	0.20 µm	pk.100
SPFNANRC45	RC	0.45 µm	pk.100

Well Filter Plates



96 Well Filter Plate, non sterile
850µL capacity



Part No.	Membrane	Pore Size	Qty.
WFPCA02	CA	0.20 µm	ea.
WFPCA45	CA	0.45 µm	ea.
WFPNC02	NC	0.20 µm	ea.
WFPNC45	NC	0.45 µm	ea.
WFPNL02	Nylon	0.20 µm	ea.
WFPNL45	Nylon	0.45 µm	ea.
WFPPS02	PES	0.20 µm	ea.
WFPPS45	PES	0.45 µm	ea.
WFPPP02	PP	0.20 µm	ea.
WFPPP45	PP	0.45 µm	ea.
WFPPT02	PTFE	0.20 µm	ea.
WFPPT45	PTFE	0.45 µm	ea.
WFPPV02	PVDF	0.20 µm	ea.
WFPPV45	PVDF	0.45 µm	ea.
WFPRC02	RC	0.20 µm	ea.
WFPRC45	RC	0.45 µm	ea.



Syringe Filters
see page 55



Spin Filters
see page 59

Membrane Filter Disc



Microfiltration is one kind of physical filtration process where contaminated fluid is passed through a special pore size membrane to separate suspended particles from liquid. Membrane filter discs are available in different membranes, pore sizes and diameters.



Membrane

CA

(Cellulose Acetate)

Part No.	Diameter	Pore Size	Qty.
MFCA013022	13 mm	0.22 µm	pk.400
MFCA025022	25 mm	0.22 µm	pk.200
MFCA047022	47 mm *	0.22 µm	pk.200
MFCA090022	90 mm	0.22 µm	pk.50
MFCA142022	142 mm	0.22 µm	pk.50
MFCA013045	13 mm	0.45 µm	pk.400
MFCA025045	25 mm	0.45 µm	pk.200
MFCA047045	47 mm *	0.45 µm	pk.200
MFCA090045	90 mm	0.45 µm	pk.50
MFCA142045	142 mm	0.45 µm	pk.50

CME

(Cellulose Mixed Esters)

MFMCCE013022	13 mm	0.22 µm	pk.400
MFMCCE025022	25 mm	0.22 µm	pk.200
MFMCCE047022	47 mm	0.22 µm	pk.200
MFMCCE050022	50 mm	0.22 µm	pk.50
MFMCCE090022	90 mm	0.22 µm	pk.50
MFMCCE142022	142 mm	0.22 µm	pk.50
MFMCCE013045	13 mm	0.45 µm	pk.400
MFMCCE025045	25 mm	0.45 µm	pk.200
MFMCCE047045	47 mm *	0.45 µm	pk.200
MFMCCE050045	50 mm	0.45 µm	pk.50
MFMCCE090045	90 mm	0.45 µm	pk.50
MFMCCE142045	142 mm	0.45 µm	pk.50

CN

(Cellulose Nitrate)

MFCN013022	13 mm	0.22 µm	pk.400
MFCN025022	25 mm	0.22 µm	pk.200
MFCN047022	47 mm *	0.22 µm	pk.200
MFCN090022	90 mm	0.22 µm	pk.50
MFCN142022	142 mm	0.22 µm	pk.50
MFCN013045	13 mm	0.45 µm	pk.400
MFCN025045	25 mm	0.45 µm	pk.200
MFCN047045	47 mm *	0.45 µm	pk.200
MFCN090045	90 mm	0.45 µm	pk.50
MFCN142045	142 mm	0.45 µm	pk.50

* matches with
Vacuum Filtration
Systems on page 64



Membrane**PTFE – Hydrophilic**

(Polytetrafluoroethylene)

Part No.	Diameter	Pore Size	Qty.
MFPTFE013022L	13 mm	0.22 µm	pk.400
MFPTFE090022L	90 mm	0.22 µm	pk.50
MFPTFE013045L	13 mm	0.45 µm	pk.400
MFPTFE025045L	25 mm	0.45 µm	pk.200
MFPTFE047045L	47 mm *	0.45 µm	pk.200
MFPTFE090045L	90 mm	0.45 µm	pk.50

PTFE – Hydrophobic

(Polytetrafluoroethylene)

MFPTFE013022B	13 mm	0.22 µm	pk.400
MFPTFE025022B	25 mm	0.22 µm	pk.200
MFPTFE047022B	47 mm *	0.22 µm	pk.200
MFPTFE090022B	90 mm	0.22 µm	pk.50
MFPTFE142022B	142 mm	0.22 µm	pk.50
MFPTFE025045B	25 mm	0.45 µm	pk.200
MFPTFE047045B	47 mm *	0.45 µm	pk.200
MFPTFE090045B	90 mm	0.45 µm	pk.50
MFPTFE142045B	142 mm	0.45 µm	pk.50

Nylon

(Polyamide)

MFNY013022	13 mm	0.22 µm	pk.400
MFNY025022	25 mm	0.22 µm	pk.200
MFNY047022	47 mm *	0.22 µm	pk.200
MFNY050022	50 mm	0.22 µm	pk.100
MFNY090022	90 mm	0.22 µm	pk.100
MFNY142022	142 mm	0.22 µm	pk.50
MFNY293022	293 mm	0.22 µm	pk.25
MFNY013045	13 mm	0.45 µm	pk.400
MFNY025045	25 mm	0.45 µm	pk.200
MFNY047045	47 mm *	0.45 µm	pk.200
MFNY050045	50 mm	0.45 µm	pk.100
MFNY090045	90 mm	0.45 µm	pk.100
MFNY142045	142 mm	0.45 µm	pk.50
MFNY293045	293 mm	0.45 µm	pk.25

PES

(Polyethersulfone)

MFPE013022	13 mm	0.22 µm	pk.400
MFPE025022	25 mm	0.22 µm	pk.200
MFPE047022	47 mm *	0.22 µm	pk.200
MFPE090022	90 mm	0.22 µm	pk.50
MFPE142022	142 mm	0.22 µm	pk.50
MFPE013045	13 mm	0.45 µm	pk.400
MFPE025045	25 mm	0.45 µm	pk.200
MFPE047045	47 mm *	0.45 µm	pk.200
MFPE090045	90 mm	0.45 µm	pk.50
MFPE142045	142 mm	0.45 µm	pk.50

PVDF Hydrophilic

(Polyvinylidene difluoride)

MFPVDF013022L	13 mm	0.22 µm	pk.400
MFPVDF025022L	25 mm	0.22 µm	pk.200
MFPVDF047022L	47 mm *	0.22 µm	pk.200
MFPVDF013045L	13 mm	0.45 µm	pk.400
MFPVDF025045L	25 mm	0.45 µm	pk.200
MFPVDF047045L	47 mm *	0.45 µm	pk.200

PVDF Hydrophobic

(Polyvinylidene difluoride)

MFPVDF013022	13 mm	0.22 µm	pk.400
MFPVDF025022	25 mm	0.22 µm	pk.200
MFPVDF047022	47 mm *	0.22 µm	pk.200
MFPVDF090022	90 mm	0.22 µm	pk.50
MFPVDF142022	142 mm	0.22 µm	pk.50
MFPVDF013045	13 mm	0.45 µm	pk.400
MFPVDF025045	25 mm	0.45 µm	pk.200
MFPVDF047045	47 mm *	0.45 µm	pk.200
MFPVDF090045	90 mm	0.45 µm	pk.50
MFPVDF142045	142 mm	0.45 µm	pk.50


* matches with
Vacuum Filtration
Systems on page 64



Vacuum Filtration Systems



BGB Filter Funnels and In-Line Systems are made of durable polypropylene and are therefore practically indestructible. All filter systems are available with a filter support in stainless steel (SS) as a standard version and with a filter support in PEEK as a Bio-compatible version. They are easy to set up and use.



Vacuum Filter System In-Line

Container/Connection
Membrane Support

Part No.

Qty.



In-Line
Stainless Steel

BVFFSINLSS

ea.



In-Line
PEEK (Bio-compatible)

BVFFSINLPK

ea.

Vacuum Filter System with 1L Funnel

Container/Connection
Membrane Support

Part No.

Qty.



1L Funnel
Stainless Steel

BVFFS1LSS

ea.



1L Funnel
PEEK (Bio-compatible)

BVFFS1LPK

ea.

Vacuum Filter System with 2L Funnel

Container/Connection
Membrane Support

Part No.

Qty.



2L Funnel
Stainless Steel

BVFFS2LSS

ea.



2L Funnel
PEEK (Bio-compatible)

BVFFS2LPK

ea.

Vacuum Filtration Systems
Accessories and Spare Parts

www.bgb-shop.com/vacuum-filtration-systems-accessories



PEEK Tubing «Premium Grade»

- 1/32", 1/16", 1/8" and 1/4" OD tubing available
- Premium grade tubing with tighter tolerances
- Biocompatible
- Easy to cut



PEEK Tubing has the strength required to withstand continuous use at HPLC pressure without swelling or bursting. The dense polymer structure of our PEEK tubing eliminates the permeability to organic solvents that causes other polymer tubing, such as ETFE to «sweat».

Remember PEEK tubing is not affected by halide salts, high strength buffers or other aggressive mobile phases that corrode stainless steel. The polymer surface will not leach metal ions into the eluent or extract metal sensitive components from the sample. By far the most outstanding property is its excellent burst pressure.

Due to the tighter tolerances, BGB PEEK tubing is the best choice for chromatography applications in which exact flow rates or tube volume are of importance. The tighter tolerance ensures a more consistent internal volume of the transfer lines.

PEEK Tubing – Solid Color-Coded – 1/16" OD



Part No.	OD	ID	Color	Pressure	Minimum Order (m)
211690	1/16"	0.050 mm	orange	483 bar	10 m
211691	1/16"	0.075 mm	purple	483 bar	10 m
211692	1/16"	0.10 mm	black	483 bar	10 m
211693	1/16"	0.13 mm	red	483 bar	10 m
211694	1/16"	0.18 mm	yellow	483 bar	10 m
211695	1/16"	0.25 mm	blue	483 bar	10 m
211696	1/16"	0.50 mm	orange	414 bar	10 m
211697	1/16"	0.75 mm	natural	276 bar	10 m
211698	1/16"	1.00 mm	black	207 bar	10 m

Maximum recommended working temperature
100 °C (continuous use).

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/16" *	0.025	0.013
1/16" **	0.025	0.025
* for ID up to 0.10 mm		
** for ID over 0.10 mm		

PEEK Tubing – Striped Color-Coded – 1/32" OD



Part No.	OD	ID	Color	Pressure	Qty.
211630-3	1/32"	0.050 mm	orange	455 bar	3 m
211631-3	1/32"	0.064 mm	pink	455 bar	3 m
211632-3	1/32"	0.075 mm	green	455 bar	3 m
211633-3	1/32"	0.10 mm	black	455 bar	3 m
211634-3	1/32"	0.13 mm	red	414 bar	3 m
211635-3	1/32"	0.15 mm	natural	400 bar	3 m
211636-3	1/32"	0.18 mm	yellow	386 bar	3 m
211637-3	1/32"	0.25 mm	blue	338 bar	3 m
211638-3	1/32"	0.50 mm	orange	207 bar	3 m

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/32"	0.025	0.025

Polymeric Tubing Chemical Compatibility Chart


www.bgb-shop.com/files/polymeric-tubing-chemical-resistance.pdf



Polymeric Tubing Cutter

see page 67

PEEK Tubing – Striped Color-Coded – 1/16" OD



Part No.	OD	ID	Color	Pressure	Qty.
211600-3	1/16"	0.050 mm	orange	480 bar	3 m
211600-5	1/16"	0.050 mm	orange	480 bar	5 m
211600-10	1/16"	0.050 mm	orange	480 bar	10 m
211600-25	1/16"	0.050 mm	orange	480 bar	25 m
211602-3	1/16"	0.075 mm	green	470 bar	3 m
211602-5	1/16"	0.075 mm	green	470 bar	5 m
211602-10	1/16"	0.075 mm	green	470 bar	10 m
211602-25	1/16"	0.075 mm	green	470 bar	25 m
211603-3	1/16"	0.10 mm	black	460 bar	3 m
211603-5	1/16"	0.10 mm	black	460 bar	5 m
211603-10	1/16"	0.10 mm	black	460 bar	10 m
211603-25	1/16"	0.10 mm	black	460 bar	25 m
211604-3	1/16"	0.13 mm	red	460 bar	3 m
211604-5	1/16"	0.13 mm	red	460 bar	5 m
211604-10	1/16"	0.13 mm	red	460 bar	10 m
211604-25	1/16"	0.13 mm	red	460 bar	25 m
211605-3	1/16"	0.18 mm	yellow	440 bar	3 m
211605-5	1/16"	0.18 mm	yellow	440 bar	5 m
211605-10	1/16"	0.18 mm	yellow	440 bar	10 m
211605-25	1/16"	0.18 mm	yellow	440 bar	25 m
211606-3	1/16"	0.25 mm	blue	420 bar	3 m
211606-5	1/16"	0.25 mm	blue	420 bar	5 m
211606-10	1/16"	0.25 mm	blue	420 bar	10 m
211606-25	1/16"	0.25 mm	blue	420 bar	25 m
211607-3	1/16"	0.50 mm	orange	345 bar	3 m
211607-5	1/16"	0.50 mm	orange	345 bar	5 m
211607-10	1/16"	0.50 mm	orange	345 bar	10 m
211607-25	1/16"	0.50 mm	orange	345 bar	25 m
211608-3	1/16"	0.75 mm	green	262 bar	3 m
211608-5	1/16"	0.75 mm	green	262 bar	5 m
211608-10	1/16"	0.75 mm	green	262 bar	10 m
211608-25	1/16"	0.75 mm	green	262 bar	25 m
211609-3	1/16"	1.00 mm	grey	179 bar	3 m
211609-5	1/16"	1.00 mm	grey	179 bar	5 m
211609-10	1/16"	1.00 mm	grey	179 bar	10 m
211609-25	1/16"	1.00 mm	grey	179 bar	25 m
211610-3	1/16"	1.40 mm	black	55 bar	3 m
211610-5	1/16"	1.40 mm	black	55 bar	5 m
211610-10	1/16"	1.40 mm	black	55 bar	10 m
211610-25	1/16"	1.40 mm	black	55 bar	25 m

Maximum recommended working temperature 100 °C (continuous) for 1/16" OD tubing with ID up to 0.75 mm.

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/16" *	0.025	0.013
1/16" **	0.025	0.025

* for ID up to 0.25 mm

** for ID over 0.25 mm



Fittings & Ferrules

see page 74


www.bgb-shop.com/hplc-accessories

Polymeric Tubing Chemical Compatibility Chart

www.bgb-shop.com/files/polymeric-tubing-chemical-resistance.pdf

PEEK Tubing «Premium Grade»

PEEK Tubing – Natural – 1/8" & 1/4" OD



Part No.	OD	ID	Color	Pressure	Minimum Order (m)
211590	1/8"	1.59 mm	natural	276 bar	10 m
211591	1/8"	2.00 mm	natural	207 bar	10 m
211684-1	1/4"	3.18 mm	natural	227 bar	per 1 m

Maximum recommended working temperature
100 °C (continuous use).

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/8"	0.003	0.003
1/4"	0.100	0.100

Tubing Sleeves

Connecting Fused Silica Tubing into HPLC Ports

Type				
Material	FEP	PEEK	FEP	PEEK
Inner Diameter	395 µm	405 µm	395 µm	380 µm
For OD Tubing	340-380 µm	350-390 µm	340-380 µm	325-365 µm
Color	Green	Orange	Green	Natural
Part No.	220545	220525	220565	220574
Qty.	pk.10	pk.10	pk.10	pk.10

Polymeric Tubing Cutter

The Polymeric Tubing Cutter makes burr-free perpendicular cuts to PEEK, PTFE, ETFE, FEP, PFA and other polymeric tubing without distorting the OD or ID. For tubing OD 1/16", 1/8", 2 mm, 3 mm and 4 mm.

Description		
Part No.	220387	220388
Qty.	ea.	ea.



SETonic PEEK Tubing Connector Syringes

www.bgb-shop.com/setonic-threaded

Polymeric Tubing

- For low and mid pressure applications
- Biocompatible
- Easy to cut



FEP Tubing

FEP (Fluorinated Ethylenepropylene) is chemically inert to most HPLC solvents and is recommended for low pressure applications. We recommend FEP for ion chromatography applications. Max. operating temperature for FEP is 80 °C.


ETFE Tubing

ETFE (Etyhltrifluoroethylene) tubing has some outstanding properties which makes it particularly suitable for HPLC since it has a higher burst pressure when compared to PTFE. It is important to note that when using ETFE with organic solvents it may swell and will reduce the max. pressure to 70 bar. It is the ideal polymer for applications with chloride salts, which typically corrode stainless steel.

PTFE Tubing

PTFE (Polytetrafluoroethylene) tubing is chemically inert and suitable for lower pressure applications. Maximum continuous operating temperature is 100 °C.

For more Polymeric Tubing materials and other diameters visit www.bgb-shop.com/polymeric-tubing
Our online filter guide will help you to find the right tubing.



FEP Tubing – Natural – 1/8" OD

Part No.	OD	ID	Color	Max Pressure	Qty.
211540-3	1/8"	1.59 mm	natural	69 bar	3 m
211540-10	1/8"	1.59 mm	natural	69 bar	10 m
211540-25	1/8"	1.59 mm	natural	69 bar	25 m
211541-3	1/8"	2.10 mm	natural	41 bar	3 m
211541-10	1/8"	2.10 mm	natural	41 bar	10 m
211541-25	1/8"	2.10 mm	natural	41 bar	25 m

Maximum recommended working temperature
for FEP Tubing
80 °C (continuous)
for ETFE Tubing
80 °C (continuous)
for PTFE Tubing
100 °C (continuous).

Tubing tolerances		
Tubing OD	OD ± mm	ID ± mm
1/8"	0.10	0.10

ETFE Tubing – Natural – 1/8" OD

Part No.	OD	ID	Color	Max Pressure	Qty.
211906-3	1/8"	1.59 mm	natural	110 bar	3 m
211906-10	1/8"	1.59 mm	natural	110 bar	10 m
211906-25	1/8"	1.59 mm	natural	110 bar	25 m

PTFE Tubing – Natural – 1/8" OD


Part No.	OD	ID	Color	Max Pressure	Qty.
211925-3	1/8"	1.59 mm	natural	35 bar	3 m
211925-5	1/8"	1.59 mm	natural	35 bar	5 m
211925-10	1/8"	1.59 mm	natural	35 bar	10 m
211925-25	1/8"	1.59 mm	natural	35 bar	25 m
211926-3	1/8"	2.40 mm	natural	18 bar	3 m
211926-5	1/8"	2.40 mm	natural	18 bar	5 m
211926-10	1/8"	2.40 mm	natural	18 bar	10 m
211926-25	1/8"	2.40 mm	natural	18 bar	25 m



Polymeric Tubing Cutter
see page 67

Stainless Steel Tubing «Premium Grade»

- Premium Grade Stainless Steel Type 316 – Seamless
- Variety of sizes for UHPLC, HPLC and GC applications
- Smooth internal surface
- Soft annealed OD for easy ferrule connections



Stainless Steel Tubing – Premium Grade – 1/32" OD

Part No.	OD	ID	Max Pressure	Qty.
211700-3	1/32"	0.13 mm	1735 bar	3 m
211700-10	1/32"	0.13 mm	1735 bar	10 m
211701-3	1/32"	0.18 mm	1600 bar	3 m
211701-10	1/32"	0.18 mm	1600 bar	10 m
211702-3	1/32"	0.25 mm	1395 bar	3 m
211702-10	1/32"	0.25 mm	1395 bar	10 m
211703-3	1/32"	0.50 mm	734 bar	3 m
211703-10	1/32"	0.50 mm	734 bar	10 m

Stainless Steel Tubing – Premium Grade – 1/16" OD

Part No.	OD	ID	Max Pressure	Qty.
211710-3	1/16"	0.13 mm	1900 bar	3 m
211710-10	1/16"	0.13 mm	1900 bar	10 m
211711-3	1/16"	0.25 mm	1735 bar	3 m
211711-10	1/16"	0.25 mm	1735 bar	10 m
211712-3	1/16"	0.38 mm	1395 bar	3 m
211712-10	1/16"	0.38 mm	1395 bar	10 m
211713-3	1/16"	0.50 mm	1395 bar	3 m
211713-10	1/16"	0.50 mm	1395 bar	10 m
211714-3	1/16"	0.75 mm	1065 bar	3 m
211714-10	1/16"	0.75 mm	1065 bar	10 m
211715-3	1/16"	1.00 mm	734 bar	3 m
211715-10	1/16"	1.00 mm	734 bar	10 m

Stainless Steel Tubing – Premium Grade – 1/8" OD

Part No.	OD	ID	Max Pressure	Qty.
211720-3	1/8"	0.75 mm	1570 bar	3 m
211720-10	1/8"	0.75 mm	1570 bar	10 m
211721-3	1/8"	1.00 mm	1400 bar	3 m
211721-10	1/8"	1.00 mm	1400 bar	10 m
211722-3	1/8"	1.52 mm	1075 bar	3 m
211722-10	1/8"	1.52 mm	1075 bar	10 m
211723-3	1/8"	1.78 mm	950 bar	3 m
211723-10	1/8"	1.78 mm	950 bar	10 m
211724-3	1/8"	2.16 mm	660 bar	3 m
211724-10	1/8"	2.16 mm	660 bar	10 m

Stainless Steel Tubing
«Premium Grade» tolerances

Tubing OD	OD ± mm	ID ± mm
1/32"	0.05	0.025
1/16"	0.05	0.025
1/8"	0.05	0.025

Metal Tubing Cutter

The Metal Tubing Cutter is the ideal way to cut 1/16" and 1/8" OD tubing, leaving smooth cuts requiring a minimum of deburring.



Metal Tubing Cutter

Part No.

220389

ea.




Replacement Cutting Wheel
for Metal Tubing Cutter

220390

ea.

Stainless Steel Tubing «Standard»

- Variety of sizes for UHPLC, HPLC and GC applications
- Smooth internal surface
- Soft annealed OD for easy ferrule connections
- Stainless Steel Type 316



Stainless Steel Tubing – Standard Grade – 1/16" OD

Part No.	OD	ID	Max Pressure	Qty.
211730-3	1/16"	0.13 mm	1870 bar	3 m
211730-10	1/16"	0.13 mm	1870 bar	10 m
211731-3	1/16"	0.18 mm	1790 bar	3 m
211731-10	1/16"	0.18 mm	1790 bar	10 m
211732-3	1/16"	0.25 mm	1715 bar	3 m
211732-10	1/16"	0.25 mm	1715 bar	10 m
211733-3	1/16"	0.50 mm	1380 bar	3 m
211733-10	1/16"	0.50 mm	1380 bar	10 m
211734-3	1/16"	0.75 mm	1075 bar	3 m
211734-10	1/16"	0.75 mm	1075 bar	10 m
211735-3	1/16"	1.00 mm	743 bar	3 m
211735-10	1/16"	1.00 mm	743 bar	10 m

Stainless Steel Tubing «Standard» tolerances

Tubing OD	OD ± mm	ID ± mm
1/16"	0.05	0.05
1/8"	0.05	0.05
1/4"	0.05	0.05

Stainless Steel Tubing – Standard Grade – 1/8" OD


Part No.	OD	ID	Max Pressure	Qty.
211740-3	1/8"	2.10 mm	680 bar	3 m
211740-10	1/8"	2.10 mm	680 bar	10 m

Stainless Steel Tubing – Standard Grade – 1/4" OD

Part No.	OD	ID	Max Pressure	Qty.
211750-1	1/4"	4.65 mm	538 bar	1 m

Copper Tubing «Pre-Cleaned»

- Recommended for carrier gas lines
- Tubing is cleaned by solvent rinse
- Baked under inert gas flow



Copper Tubing tolerances

Tubing OD	OD ± mm	Wall ± mm
1/8"	0.051	0.076
1/4"	0.051	0.064

Part No.	OD	ID	Max Pressure	Qty.
211760	1/8"	1.65 mm (0.065")	193 bar	15.24 m (50 ft)
211761	1/4"	4.83 mm (0.190")	69 bar	15.24 m (50 ft)

Swagelok® Fittings and Unions

Fittings Brass

BGB carries a full line of quality Swagelok fittings, unions and connectors.



Part No.	Description	Qty.
SW-B-102-1	1/16" Nut	10
SW-B-202-1	1/8" Nut	10
SW-B-402-1	1/4" Nut	10



Part No.	Description	Qty.
SW-B-103-1	1/16" Front Ferrule	10
SW-B-203-1	1/8" Front Ferrule	10
SW-B-403-1	1/4" Front Ferrule	10



Part No.	Description	Qty.
SW-B-104-1	1/16" Back Ferrule	10
SW-B-204-1	1/8" Back Ferrule	10
SW-B-404-1	1/4" Back Ferrule	10



Part No.	Description	Qty.
SW-B-100-C	1/16" Cap	5
SW-B-200-C	1/8" Cap	5
SW-B-400-C	1/4" Cap	5



Part No.	Description	Qty.
SW-B-100-P	1/16" Plug	5
SW-B-200-P	1/8" Plug	5
SW-B-400-P	1/4" Plug	5



Part No.	Description	Qty.
SW-B-100-6	Union 1/16" to 1/16" ea.	
SW-B-200-6	Union 1/8" to 1/8" ea.	
SW-B-400-6	Union 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-B-200-6-1	Reducing Union 1/8" to 1/16"	ea.
SW-B-400-6-1	Reducing Union 1/4" to 1/16"	ea.
SW-B-400-6-2	Reducing Union 1/4" to 1/8"	ea.



Part No.	Description	Qty.
SW-B-100-3	Union Tees 1/16" x 1/16" x 1/16"	ea.
SW-B-200-3	Union Tees 1/8" x 1/8" x 1/8"	ea.
SW-B-400-3	Union Tees 1/4" x 1/4" x 1/4"	ea.



Part No.	Description	Qty.
SW-B-100-6BT	Bored Through Unions 1/16" to 1/16" ea.	
SW-B-200-6BT	Bored Through Unions 1/8" to 1/8" ea.	
SW-B-400-6BT	Bored Through Unions 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-B-100-1-1	Male Connector 1/16" to 1/16" NPT	ea.
SW-B-200-1-2	Male Connector 1/8" to 1/8" NPT	ea.
SW-B-400-1-4	Male Connector 1/4" to 1/4" NPT	ea.
SW-B-100-1-2	Male Connector 1/16" to 1/8" NPT	ea.
SW-B-200-1-1	Male Connector 1/8" to 1/16" NPT	ea.
SW-B-400-1-2	Male Connector 1/4" to 1/8" NPT	ea.
SW-B-200-1-4	Male Connector 1/8" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-B-200-7-2	Female Connector 1/8" to 1/8" NPT	ea.
SW-B-200-7-4	Female Connector 1/8" to 1/4" NPT	ea.
SW-B-400-7-2	Female Connector 1/4" to 1/8" NPT	ea.
SW-B-400-7-4	Female Connector 1/4" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-B-100-R-2	Reducers 1/16" to 1/8" Tube	ea.
SW-B-200-R-2	Reducers 1/8" to 1/8" Tube	ea.
SW-B-400-R-2	Reducers 1/4" to 1/8" Tube	ea.

Fittings Stainless Steel

BGB carries a full line of quality Swagelok fittings, unions and connectors.



Part No.	Description	Qty.
SW-SS-102-1	1/16" Nut	10
SW-SS-202-1	1/8" Nut	10
SW-SS-402-1	1/4" Nut	10



Part No.	Description	Qty.
SW-SS-103-1	1/16" Front Ferrule	10
SW-SS-203-1	1/8" Front Ferrule	10
SW-SS-403-1	1/4" Front Ferrule	10



Part No.	Description	Qty.
SW-SS-104-1	1/16" Back Ferrule	10
SW-SS-204-1	1/8" Back Ferrule	10
SW-SS-404-1	1/4" Back Ferrule	10



Part No.	Description	Qty.
SW-SS-100-C	1/16" Cap	5
SW-SS-200-C	1/8" Cap	5
SW-SS-400-C	1/4" Cap	5



Part No.	Description	Qty.
SW-SS-100-P	1/16" Plug	5
SW-SS-200-P	1/8" Plug	5
SW-SS-400-P	1/4" Plug	5



Part No.	Description	Qty.
SW-SS-100-6	Union 1/16" to 1/16" ea.	
SW-SS-200-6	Union 1/8" to 1/8" ea.	
SW-SS-400-6	Union 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-SS-200-6-1	Reducing Union 1/8" to 1/16"	ea.
SW-SS-400-6-1	Reducing Union 1/4" to 1/16"	ea.
SW-SS-400-6-2	Reducing Union 1/4" to 1/8"	ea.



Part No.	Description	Qty.
SW-SS-100-3	Union Tees 1/16" x 1/16" x 1/16"	ea.
SW-SS-200-3	Union Tees 1/8" x 1/8" x 1/8"	ea.
SW-SS-400-3	Union Tees 1/4" x 1/4" x 1/4"	ea.



Part No.	Description	Qty.
SW-SS-100-6BT	Bored Through Unions 1/16" to 1/16" ea.	
SW-SS-200-6BT	Bored Through Unions 1/8" to 1/8" ea.	
SW-SS-400-6BT	Bored Through Unions 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-SS-100-1-1	Male Connector 1/16" to 1/16" NPT	ea.
SW-SS-200-1-2	Male Connector 1/8" to 1/8" NPT	ea.
SW-SS-400-1-4	Male Connector 1/4" to 1/4" NPT	ea.
SW-SS-100-1-2	Male Connector 1/16" to 1/8" NPT	ea.
SW-SS-200-1-1	Male Connector 1/8" to 1/16" NPT	ea.
SW-SS-400-1-2	Male Connector 1/4" to 1/8" NPT	ea.
SW-SS-200-1-4	Male Connector 1/8" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-SS-200-7-2	Female Connector 1/8" to 1/8" NPT	ea.
SW-SS-200-7-4	Female Connector 1/8" to 1/4" NPT	ea.
SW-SS-400-7-2	Female Connector 1/4" to 1/8" NPT	ea.
SW-SS-400-7-4	Female Connector 1/4" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-SS-100-R-2	Reducers 1/16" to 1/8" Tube	ea.
SW-SS-200-R-2	Reducers 1/8" to 1/8" Tube	ea.
SW-SS-400-R-2	Reducers 1/4" to 1/8" Tube	ea.

Gas Toggle Valves

- Compact, rugged design
- Opens and closes quickly
- Straight and angle flow patterns

Swagelok® Toggle Valve Brass

Part No.	Description	Qty.
SW-B-OGS2	Toggle Valve, Brass, 1/8", straight	ea.
SW-B-1GS4	Toggle Valve, Brass, 1/4", straight	ea.
SW-B-OGS2-A	Toggle Valve, Brass, 1/8", angled	ea.
SW-B-1GS4-A	Toggle Valve, Brass, 1/4", angled	ea.

Swagelok® Toggle Valve Stainless Steel

Part No.	Description	Qty.
SW-SS-OGS2	Toggle Valve, SS, 1/8", straight	ea.
SW-SS-1GS4	Toggle Valve, SS, 1/4", straight	ea.
SW-SS-OGS2-A	Toggle Valve, SS, 1/8", angled	ea.
SW-SS-1GS4-A	Toggle Valve, SS, 1/4", angled	ea.



Toggle Valve, straight



Toggle Valve, angled

Gas Ball Valves

- Working pressure up to 200 bar
- Temperatures up to 150 °C
- Straight and angle flow patterns

Swagelok® Ball Valve Brass

Part No.	Description	Qty.
SW-B-41S2	Ball Valve, Brass, 1/8", straight	ea.
SW-B-43S4	Ball Valve, Brass, 1/4", straight	ea.
SW-B-41S2-A	Ball Valve, Brass, 1/8", angled	ea.
SW-B-43S4-A	Ball Valve, Brass, 1/4", angled	ea.

Swagelok® Ball Valve Stainless Steel

Part No.	Description	Qty.
SW-SS-41GS2	Ball Valve, SS, 1/8", straight	ea.
SW-SS-43GS4	Ball Valve, SS, 1/4", straight	ea.
SW-SS-41GS2-A	Ball Valve, SS, 1/8", angled	ea.
SW-SS-43GS4-A	Ball Valve, SS, 1/4", angled	ea.



Ball Valve, straight



Ball Valve, angled

Hexagon Key Set, 30 pieces (mm & inch)



Metric: 0.7; 0.9; 1.27; 1.5; 2.0; 2.5; 4.0; 4.5; 5.0; 5.5;
6.0; 7.0; 8.0; 10.0 mm
Inch: 0.028; 0.036; 0.05; 1/16; 5/64; 3/32; 7/64; 1/8;
9/64; 5/32; 3/16; 7/32; 1/4; 5/16 and 3/8 inch
Material: Chrome-Vanadium Steel

Part No.	Description	Qty.
IMBUS	Hexagon Key Set (mm & inch), Chrome-Vanadium Steel	ea.

HPLC Adapters, Fittings and Unions



1/16" 10-32 Standard HPLC Fittings for 1/16" OD Tubing

«No-Twist-One-Piece»

Material
Thread
Miscellaneous
Part No.
Qty.



max. 350 bar

PEEK
1/16" 10-32
Hex Head, Short

220366
pk.5



max. 350 bar

PEEK
1/16" 10-32
Hex Head, Standard

220367
pk.5



max. 350 bar

PEEK
1/16" 10-32
Hex Head, Long

220368
pk.5



max. 350 bar

PEEK
1/16" 10-32
Fingertight

220369
pk.5

One-Piece

Material
Thread
Miscellaneous
Part No.
Qty.



max. 345 bar

PEEK
1/16" 10-32
Fingertight, Short

220370
pk.10



max. 345 bar

PEEK
1/16" 10-32
Fingertight, Long

220371
pk.10



max. 345 bar

PEEK
1/16" 10-32
Fingertight

200910
pk.10

Tubing Sleeves – Connecting Fused Silica Tubing into HPLC Ports

Type
Material
Inner Diameter
For OD Tubing
Color
Part No.
Qty.



1/16" OD
FEP
395 µm
340-380 µm
Green

220545
pk.10



1/16" OD
PEEK
405 µm
350-390 µm
Orange

220525
pk.10



1/32" OD
FEP
395 µm
340-380 µm
Green

220565
pk.10



1/32" OD
PEEK
380 µm
325-365 µm
Natural

220574
pk.10

1/16" 10-32 UHPLC Fittings, Ferrules and Nuts for 1/16" OD Tubing

Type	 max. 1400 bar	 max. 1400 bar	 max. 1400 bar	 max. 1400 bar	 max. 1400 bar
Material	Nut & Ferrule SS & Ti/PEEK	Nut & Ferrule SS & Ti/PEEK	Nut & Ferrule SS & Ti/PEEK	Nut & Ferrule SS & Ti/PEEK	Ferrule Ti/PEEK
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" OD Tubing
Miscellaneous	Hex Head, Short	Hex Head, Standard	Hex Head, Long	Fingertight	-
Part No.	220355	220356	220357	220358	220359
Qty.	ea.	ea.	ea.	ea.	pk.2

Type	 max. 1375 bar	 max. 1375 bar	 max. 1375 bar	 max. 1375 bar
Material	Nut SS	Nut SS	Nut SS	Ferrule SS
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" OD Tubing
Miscellaneous	Hex Head, Short	Hex Head, Standard	Hex Head, Long	Valco Type
Part No.	200952	200953	200954	200955
Qty.	pk.5	pk.5	pk.5	pk.5

One-Piece

Type	 max. 827 bar	 max. 700 bar	 max. 1000 bar
Material	Fitting PEEK	Fitting PEEK	Fitting PEEK
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32
Miscellaneous	Fingertight	Hex Head	Fingertight
Part No.	220364	220365	200910-HP
Qty.	pk.10	pk.10	pk.10



BGB HPLC Columns

www.bgb-shop.com/hplc-columns

1/4"-28 Flangeless Fittings & Ferrules

* depends on the ferrule used

Type	Nut	Nut	Nut	Ferrule	Ferrule
Material	PEEK	PEEK	POM	ETFE with SS Ring	PEEK with SS Ring
Thread	1/4"-28	1/4"-28	1/4"-28	-	-
Miscellaneous	Fingertight, Short	Fingertight, Long	Fingertight, Long	1/8" OD Tubing	1/8" OD Tubing
Part No.	220344	220345	220346	220347	220348
Qty.	pk.10	pk.10	pk.10	pk.10	pk.10

Type	Nut	Ferrule	Nut	Ferrule
Material	PPS	ETFE	PPS	ETFE
Thread	1/4"-28	-	1/4"-28	-
Miscellaneous	for 1/8" OD Tubing Hex Head	1/8" OD Tubing	for 1/16" OD Tubing Hex Head	1/16" OD Tubing
Part No.	220349	220351	220350	220352
Qty.	pk.10	pk.10	pk.10	pk.10

Type	Fitting	Fitting
Material	PEEK	PEEK
Thread	1/4"-28	1/4"-28
Miscellaneous	«No-Twist-One-Piece» Fingertight	«No-Twist-One-Piece» Fingertight
Part No.	220353	220354
Qty.	ea.	ea.

M6 Fitting & Ferrule for 1/8" OD Tubing

Type	Nut	Ferrule
Material	PEEK	PEEK with SS Ring
Thread	M6 (metric)	1/8" OD Tubing
Part No.	220373	220348
Qty.	pk.5	pk.10

Adapters

Material	PEEK	PEEK	PEEK
Thread	1/16" 10-32 female to 1/4"-28 female	1/16" 10-32 male to 1/4"-28 female	1/16" 10-32 female to M6 female
Bore	0.4 mm	0.4 mm	0.4 mm
Part No.	220312	220300	220317
Qty.	ea.	ea.	ea.



SETonic PEEK Tubing Connector Syringes

www.bgb-shop.com/setonic-threaded

More Adapters, Fittings & Ferrules

www.bgb-shop.com/hplc-accessories

Unions

1/16" 10-32 Thread

Material
Thread
Bore
Part No.
Qty.



max. 350 bar
PEEK
1/16" 10-32
0.25 mm
201950
ea.



max. 350 bar
PEEK
1/16" 10-32
0.50 mm
201951
ea.



max. 1375 bar
SS
1/16" 10-32
0.15 mm
200980
ea.



max. 1375 bar
SS
1/16" 10-32
0.25 mm
200981
ea.



max. 1375 bar
SS
1/16" 10-32
0.50 mm
200982
ea.

1/4"-28 Thread

Material
Thread
Bore
Part No.
Qty.



max. 105 bar
PEEK
1/4"-28
1/16" OD tubing
0.75 mm
220379
ea.



max. 35 bar
PEEK
1/4"-28
1/8" OD tubing
1.3 mm
220380
ea.



ETFE
1/4"-28
-
End to End thread
220381
ea.

Reducing Unions

Material
Thread
Bore
Part No.
Qty.



max. 1375 bar
SS
1/16" 10-32 to
1/32" 6-40
0.15 mm
220382
ea.



max. 1375 bar
SS
1/16" 10-32 to
1/8" 5/16"-24
0.75 mm
200984
ea.



max. 350 bar
SS
1/16" 10-32 to
1/4" 7/16"-20
0.75 mm
220384
ea.



Material
Thread
Bore
Part No.
Qty.

max. 350 bar
PEEK
1/16" 10-32 to
360 µm 2-56
0.15 mm
202010
ea.



max. 350 bar
PEEK
1/16" 10-32 to
1/32" 6-40
0.25 mm
220386
ea.



max. 350 bar
PEEK
1/16" 10-32 to
1/8" 5/16"-24
0.75 mm
201970
ea.

Tees

Material
Thread
Bore
Part No.
Qty.



max. 350 bar
PEEK
1/16" 10-32
0.25 mm
201980
ea.



max. 350 bar
PEEK
1/16" 10-32
0.50 mm
201981
ea.



max. 1375 bar
SS
1/16" 10-32
0.25 mm
200985
ea.



max. 1375 bar
SS
1/16" 10-32
0.50 mm
200986
ea.

Adapters for Luer Ports (Syringe Adapters)

Material
Thread

Bore

Part No.
Qty.



PEEK
1/4"-28 female to
Luer Lock female
1.3 mm
220302
ea.



ETFE
1/4"-28 female to
Luer Lock female
1.0 mm
220303
pk.5



PEEK
1/4"-28 female to
Luer Lock male
1.3 mm
220304
ea.



PEEK
1/4"-28 male to
Luer female
1.5 mm
220305
ea.



ETFE
1/4"-28 male to
Luer Lock female
1.3 mm
220306
pk.5

Material
Thread

Bore

Part No.
Qty.



ETFE
1/4"-28 male to
Luer male
1.0 mm
220307
pk.5



PEEK
1/4"-28 male to
Luer Lock male
1.0 mm
220308
ea.



ETFE
1/16" 10-32 female to
Luer Lock female
1.0 mm
220313
pk.5



PEEK
1/16" 10-32 female to
Luer Lock female
1.3 mm
220314
ea.



PEEK
1/16" 10-32 female to
Luer Lock male
1.3 mm
220315
ea.

Material
Thread

Bore

Part No.
Qty.



PEEK
1/16" 10-32 male to
Luer Lock female
1.3 mm
220337
ea.



ETFE
1/16" 10-32 male to
Luer Lock female
1.3 mm
220316
pk.5



for Injection
Valves
SS
1/16" 10-32 male to
Luer female
1.0 mm
220322
ea.



PEEK
M6 female to
Luer Lock female
1.3 mm
220320
ea.



ETFE
M6 male to
Luer Lock female
1.3 mm
220321
pk.5

Material
Thread

Bore
For Tubing

Part No.
Qty.



PP
Luer Lock female
to Barbed
0.76 mm
1/16" ID
220323
pk.10



PP
Luer Lock female
to Barbed
1.4 mm
3/32" ID
220324
pk.10



PP
Luer Lock female
to Barbed
2.0 mm
1/8" ID
220325
pk.10



PP
Luer Lock male
to Barbed
1.24 mm
1/16" ID
220326
pk.10



PP
Luer Lock male
to Barbed
1.8 mm
3/32" ID
220327
pk.10

Material
Thread

Bore
For Tubing

Part No.
Qty.



PP
Luer Lock male
to Barbed
2.5 mm
1/8" ID
220328
pk.10



PP
Luer Lock female
to Luer Lock female
0.4 mm
220329
pk.10



HPLC Certified Plastic
Disposable Syringes
see page 58

Plugs

					
Material	SS	PEEK	ETFE	PEEK	POM
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/4"-28	1/4"-28
Part No.	220330	220331	220332	220333	220334
Qty.	ea.	pk. 5	pk. 10	pk. 5	pk. 10

					
Material	SS	SS	PEEK		
Thread	1/8" 5/16"-24	1/4" 7/16"-20	360µm 2-56		
Part No.	220335	220336	202002		
Qty.	ea.	ea.	ea.		

Caps

					
Material	SS, high Pressure	PEEK	ETFE	PEEK	ETFE
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/4"-28	1/4"-28
Miscellaneous	(incl. cap, nut & ferrule)	(incl. cap, nut & ferrule)			
Part No.	200972	220338	220339	220340	220341
Qty.	ea.	ea.	pk. 10	ea.	pk. 10

					
Material	SS	SS	PEEK,	SS	SS
Thread	1/8" 5/16"-24	1/4" 7/16"-20	360µm 2-56 thread	360µm 2-56 thread	360µm 2-56 thread
Miscellaneous	(incl. cap, nut & ferrule)	(incl. cap, nut & ferrule)	(incl. cap & fitting)	FS Type (incl. cap & fitting)	Metal Type (incl. cap & fitting)
Part No.	200973	220343	202001	202021	202031
Qty.	ea.	ea.	ea.	ea.	ea.



BGB HPLC Columns

www.bgb-shop.com/hplc-columns

HPLC Safety Products

Thread Identification for Safety-Caps and Waste-Caps

Bottle and Canister Threads


BGB Safety-Caps and Waste-Caps are available for a wide variety of differing bottle and canister threads. On this page you will find a table for determining thread sizes, together with a helpful overview of typical thread types.

Instructions

It is best to use a slide gauge to determine the thread outer diameter and the thread pitch of the bottle or canister as shown on our schematic drawings. The measured values can be used to determine the thread type by comparing the measured dimensions with the typical dimensions in the table below.

Once the thread type has been determined the corresponding Safety-Caps or Waste-Caps can be selected.


Please keep in mind: Due to manufacturing tolerances of the various manufacturers, the thread dimensions can vary by up to 0.5 mm. In case of problems, please contact us.

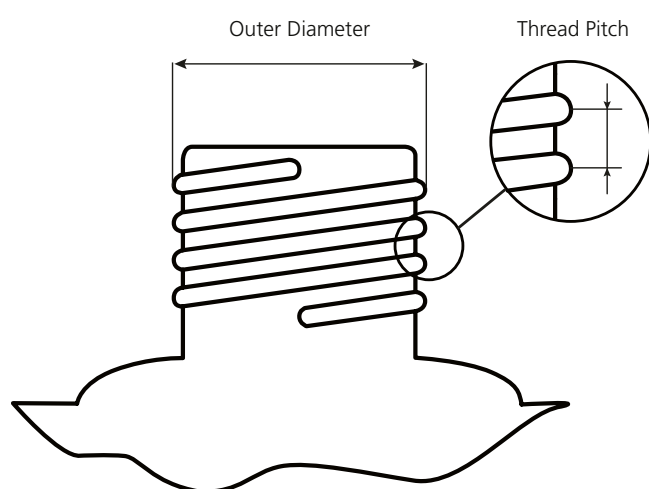

Round Thread

For example:

- Bottle thread (GL or GLS)
- Common standard for laboratory bottles

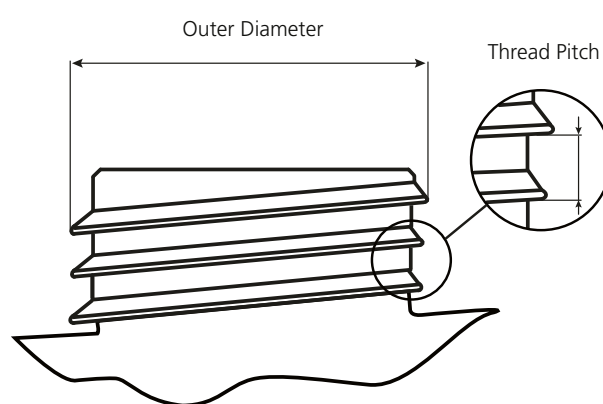

Saw Thread

For example:

- Canisters (S-Thread)
- Nalgen canisters
- Barrels (Mauser, Trisure, BCS-Threads)
- GPI (Glass Packaging Institute) Standard
- Other plastic canisters

Thread Identification Table

Thread Type	Outer Diameter [mm]	Thread Pitch [mm]
GL 45	45.0	4.0
S 50	50.0	4.0
B 53	54.0	6.0
S 55 (DIN 51)	54.0	5.0
S 60 / S 61 (DIN 60)	59.5	6.0
B 83	88.0	12.7
S 90 (DIN 90)	89.5	6.0

Safety-Caps GL45 with Safety Air Inlet Valve Standard

Safety-Caps GL45 are available in blue, green, red, purple and yellow.



Standard

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-S45F1
SP-S45F1-G
SP-S45F1-R
SP-S45F1-V
SP-S45F1-Y

ea.



2x 1/8"

SP-S45F2
SP-S45F2-G
SP-S45F2-R
SP-S45F2-V
SP-S45F2-Y

ea.



3x 1/8"

SP-S45F3
SP-S45F3-G
SP-S45F3-R
SP-S45F3-V
SP-S45F3-Y

ea.



-G

-R

-V

-Y

Standard

Tubing Ports

Part No.

Qty.



4x 1/8"

SP-S45F4
SP-S45F4-G
SP-S45F4-R
SP-S45F4-V
SP-S45F4-Y

ea.



5x 1/8"

SP-S45F5
SP-S45F5-G
SP-S45F5-R
SP-S45F5-V
SP-S45F5-Y

ea.



6x 1/8"

SP-S45F6
SP-S45F6-G
SP-S45F6-R
SP-S45F6-V
SP-S45F6-Y

ea.

Colour and type of the nuts can vary.

with Lock

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-S45F1-L

ea.



2x 1/8"

SP-S45F2-L

ea.



3x 1/8"

SP-S45F3-L

ea.



4x 1/8"

SP-S45F4-L

ea.

Other colours on request.

Colour and type of the nuts can vary.

Safety Air Inlet Valve and Safety Air Inlet Filters for Safety-Caps

Description

Part No.

Qty.



Safety Air Inlet Filter
CO₂ (Carbon Dioxide)
removal

211998-CO2

ea.



Safety Air Inlet Filter
Humidity removal

211998-H

ea.



Safety Air Inlet Valve
Standard

SP-SAIV

ea.



Safety Air Inlet Valve
for basic Amine Solvents

SP-SAIV-A

ea.



Safety Air Inlet Valve
Prep

SP-SAIV-P

ea.

Safety-Caps GL45 for Prep HPLC with Safety Air Inlet Valve Standard

up to
150 ml/min
flow

Tubing Ports

Part No.

Qty.



1x 1/4"

SP-S45P141

ea.



1x 1/4"
1x 1/8"

SP-S45F1P141

ea.



1x 3/16"

SP-S45P3161

ea.



2x 3/16"

SP-S45P3162

ea.



3x 3/16"

SP-S45P3163

ea.

Other colours on request.

Safety-Caps S55 for Prep HPLC with Safety Air Inlet Valve Prep

up to
500 ml/min
flow

Tubing Port

Part No.

Qty.



1x 3/16"

SP-S55P316

ea.



1x 1/4"
1x 3/16"

SP-S55P316P141

ea.



1x 1/4"
1x 1/8"

SP-S55F1P141

ea.

Safety-Caps S60 for Prep HPLC with Safety Air Inlet Valve Prep

up to
500 ml/min
flow

Tubing Port

Part No.

Qty.



1x 1/4"

SP-S60P141

ea.



1x 3/16"

SP-S60P316

ea.



1x 1/4"
1x 3/16"

SP-S60P316P141

ea.



1x 1/4"
1x 1/8"

SP-S60F1P141

ea.

Safety-Caps Ground Neck Bottle 29/32 mm with Air Inlet Valve Standard

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-SGNF1

ea.



2x 1/8"

SP-SGNF2

ea.



3x 1/8"

SP-SGNF3

ea.



4x 1/8"

SP-SGNF4

ea.



Safety-Adapter
Ground Neck
29/32mm (male) to
GL45 (male)

SP-AGN45

ea.

Colour and type of the nuts can vary.

Waste-Caps GL45 with Safety-Waste-Filter Port



Waste-Caps GL45 are available in blue, green, red, purple and yellow. Please contact us for colored version.

Tubing Ports

Part No.
Qty.



1x 1/8"
SP-W45F1
ea.



1x 1/8"
1x Barbed*
SP-W45F1B1
ea.



1x 1/8"
2x Barbed*
SP-W45F1B2
ea.



1x Barbed*
SP-W45B1
ea.

Tubing Ports

Part No.
Qty.



2x 1/8"
SP-W45F2
ea.



2x 1/8"
1x Barbed*
SP-W45F2B1
ea.



2x 1/8"
2x Barbed*
SP-W45F2B2
ea.



2x Barbed*
SP-W45B2
ea.

Tubing Ports

Part No.
Qty.



3x 1/8"
SP-W45F3
ea.



3x 1/8"
1x Barbed*
SP-W45F3B1
ea.



4x 1/8"
SP-W45F4
ea.



4x 1/8"
1x Barbed*
SP-W45F4B1
ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Safety-Waste-Filters, Standard

Size
Service Life Time
Part No.
Qty.



Small
3 Months
SP-FSS
ea.



Medium
6 Months
SP-FSM
ea.



Large
12 Months
SP-FSL
ea.

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S50 with Safety-Waste-Filter Port


Tubing Ports				
	1x 1/8 "	1x 1/8 "	1x 1/8 "	1x 1/8 "
		1x Barbed*	2x Barbed*	3x Barbed*
	Part No. SP-W50F1 Qty. ea.	Part No. SP-W50F1B1 Qty. ea.	Part No. SP-W50F1B2 Qty. ea.	Part No. SP-W50F1B3 Qty. ea.
Tubing Ports				
	2x 1/8 "	2x 1/8 "	2x 1/8 "	2x 1/8 "
		1x Barbed*	2x Barbed*	3x Barbed*
	Part No. SP-W50F2 Qty. ea.	Part No. SP-W50F2B1 Qty. ea.	Part No. SP-W50F2B2 Qty. ea.	Part No. SP-W50F2B3 Qty. ea.
Tubing Ports				
	3x 1/8 "	3x 1/8 "	3x 1/8 "	3x 1/8 "
		1x Barbed*	2x Barbed*	3x Barbed*
	Part No. SP-W50F3 Qty. ea.	Part No. SP-W50F3B1 Qty. ea.	Part No. SP-W50F3B2 Qty. ea.	Part No. SP-W50F3B3 Qty. ea.
Tubing Ports				
	4x 1/8 "	5x 1/8 "	2x 1/8 "	Waste Canister S50
	Miscellaneous -	-	1x Barbed*	PP, 5 Liter
	Part No. SP-W50F4 Qty. ea.	Part No. SP-W50F5 Qty. ea.	Part No. SP-W50F2B1-I Qty. ea.	with Liter Graduation Small Footprint Part No. SP-C50PE5 Qty. ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.



Safety Waste Filter
see page 89



Polymeric Tubing
see page 68

Waste-Caps S55 (DIN 51) with Safety-Waste-Filter Port

Tubing Ports				
	1x 1/8"	1x 1/8" 1x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W55F1	Part No. SP-W55F1B1	Part No. SP-W55F1B2	Part No. SP-W55F1B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	2x 1/8"	2x 1/8" 1x Barbed*	2x 1/8" 2x Barbed*	2x 1/8" 3x Barbed*
	Part No. SP-W55F2	Part No. SP-W55F2B1	Part No. SP-W55F2B2	Part No. SP-W55F2B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	3x 1/8"	3x 1/8" 1x Barbed*	3x 1/8" 2x Barbed*	3x 1/8" 3x Barbed*
	Part No. SP-W55F3	Part No. SP-W55F3B1	Part No. SP-W55F3B2	Part No. SP-W55F3B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	4x 1/8"	3x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W55F4	Part No. SP-W55B3	Part No. SP-W55F1B2-I	Part No. SP-W55F1B3-I
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Miscellaneous	-	-	Level Indicator	Level Indicator

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S60/61 (DIN 60) with Safety-Waste-Filter Port

Tubing Ports				
	1x 1/8"	1x 1/8" 1x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W60F1	Part No. SP-W60F1B1	Part No. SP-W60F1B2	Part No. SP-W60F1B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	2x 1/8"	2x 1/8" 1x Barbed*	2x 1/8" 2x Barbed*	2x 1/8" 3x Barbed*
	Part No. SP-W60F2	Part No. SP-W60F2B1	Part No. SP-W60F2B2	Part No. SP-W60F2B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	3x 1/8"	3x 1/8" 1x Barbed*	3x 1/8" 2x Barbed*	3x 1/8" 3x Barbed*
	Part No. SP-W60F3	Part No. SP-W60F3B1	Part No. SP-W60F3B2	Part No. SP-W60F3B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	4x 1/8"	5x 1/8"	5x 1/8" 3x Barbed*	4x Barbed*
	Part No. SP-W60F4	Part No. SP-W60F5	Part No. SP-W60F5B3	Part No. SP-W60B4
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Waste-Caps B53 (for NALGENE® Bottles & Canister) with Safety-Waste-Filter Port

				
Tubing Ports	1x 1/8" 1x Barbed*	2x 1/8" 1x Barbed*	3x 1/8" 1x Barbed*	3x 1/8"
Part No.	SP-W53F1B1	SP-W53F2B1	SP-W53F3B1	SP-W53F3
Qty.	ea.	ea.	ea.	ea.

Waste-Caps B83 (for NALGENE® Bottles & Canister) with Safety-Waste-Filter Port


			
Tubing Ports	1x 1/8" 1x Barbed*	2x 1/8" 1x Barbed*	3x 1/8" 1x Barbed*
Part No.	SP-W83F1B1	SP-W83F2B1	SP-W83F3B1
Qty.	ea.	ea.	ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Safety-Waste-Filters, Standard

			
Size	Small	Medium	Large
Service Life Time	3 Months	6 Months	12 Months
Part No.	SP-FSS	SP-FSM	SP-FSL
Qty.	ea.	ea.	ea.



Polymeric Tubing
see page 68

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S90 (DIN 90) with Safety-Waste-Filter Port

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-W90F1

ea.



2x 1/8"

SP-W90F2

ea.



3x 1/8"

SP-W90F3

ea.



4x 1/8"

SP-W90F4

ea.



5x 1/8"

SP-W90F5

ea.

Tubing Ports

Part No.

Qty.



6x 1/8"

SP-W90F6

ea.



2x 1/8"

1x Barbed*

SP-W90F2B1

ea.



2x 1/8"

2x Barbed*

SP-W90F2B2

ea.



2x 1/8"

3x Barbed*

SP-W90F2B3

ea.



2x 1/8"

4x Barbed*

SP-W90F2B4

ea.

Tubing Ports

Part No.

Qty.



6x 1/8"

2x Barbed*

SP-W90F6B2

ea.



3x 1/8"

1x Barbed*

SP-W90F3B1

ea.



3x 1/8"

2x Barbed*

SP-W90F3B2

ea.



3x 1/8"

3x Barbed*

SP-W90F3B3

ea.



3x 1/8"

4x Barbed*

SP-W90F3B4

ea.

Tubing Ports

Part No.

Qty.



1x Barbed*

SP-W90B1

ea.



2x Barbed*

SP-W90B2

ea.



3x Barbed*

SP-W90B3

ea.



4x Barbed*

SP-W90B4

ea.




5x Barbed*

SP-W90B5

ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.



Polymeric Tubing
see page 68

Safety-Waste-Filters and Adapters

				
Type & Size	Safety-Waste-Filter Standard, SMALL	Safety-Waste-Filter Standard, MEDIUM	Safety-Waste-Filter Standard, LARGE	
Service Life Time	3 Months	6 Months	12 Months	
Part No.	SP-FSS	SP-FSM	SP-FSL	
Qty.	ea.	ea.	ea.	
				
Type & Size	Safety-Waste-Filter Acid Vapor, MEDIUM	Safety-Waste-Filter Acid Vapor, LARGE	Safety-Adapter Straight Extension 50 mm for Safety-Waste-Filter Port	Safety-Adapter 90° Extension 45 mm for Safety-Waste-Filter Port
Service Life Time	3 Months	6 Months		
Part No.	SP-FAM	SP-FAL	SP-AFSE	SP-AF90E
Qty.	ea.	ea.	ea.	ea.
				
Type & Size	Safety-Waste-Filter Standard	Safety-Adapter to install Safety-Waste-Filter with Indicator 211998-I to Safety-Waste-Filter Port	Safety-Waste-Filter XL for Barrels	Safety-Waste-Filter XXL for Barrels
Miscellaneous	requires Adapter 211999		3 – 6 Months Service Life	9 – 12 Months Service Life
Part No.	211998-I	211999	SP-FSXL	SP-FSXXL
Qty.	ea.	ea.	ea.	ea.

Barbed Tubing Port Fittings

Material Type for Tubing ID Part No. Qty.				
	PP Straight 3.0-4.0 mm SP-BFS34PP ea.	PP Straight 5.0-6.0 mm SP-BFS56PP ea.	PP Straight 6.0-9.0 mm SP-BFS69PP ea.	PP Straight 9.0-11.0 mm SP-BFS911PP ea.
Material Type for Tubing ID Part No. Qty.				
	PP 90° Angled 3.0-4.0 mm SP-BFA34PP ea.	PP 90° Angled 5.0-6.0 mm SP-BFA56PP ea.	PP 90° Angled 6.0-9.0 mm SP-BFA69PP ea.	PP 90° Angled 9.0-11.0 mm SP-BFA911PP ea.

Barbed Tubing Connectors



Conical

Part No.	Material	Tubing ID mm	Qty.
SP-AC4280	PP	4.2-8.0 to 4.2-8.0	ea.
SP-AC6565	PP	6.5 to 6.5	ea.
SP-AC1612	PP	10.5-16.0 to 6.5-12.0	ea.
SP-AC1675	PP	10.5-16.0 to 3.0-7.5	ea.
SP-AC7012	PP	7.0-11.0 to 7.0-12.0	ea.
SP-AC1512	PP	11.0-15.0 to 7.0-12.0	ea.




Y-Connector

Part No.	Material	Tubing ID mm	Qty.
SP-AY3PP	PP	3.0	ea.
SP-AY5PP	PP	5.0	ea.
SP-AY7PP	PP	7.0	ea.
SP-AY9PP	PP	9.0	ea.
SP-AY11PP	PP	11.0	ea.

More HPLC Barbed Tubing Port
Fittings and Connectors

www.bgb-shop.com/safety-accessories



Polymeric Tubing
see page 68

Safety Thread Adapters



to GL 45 Caps

Part No.	Material	Thread to Bottle (female)	Thread to Cap (male)	Qty.
SP-A2845PTFE	PTFE	PP28	GL45	ea.
SP-A3245PTFE	PTFE	GL32	GL45	ea.
SP-A3245PP	PP	GL32	GL45	ea.
SP-A3845PTFE	PTFE	GL38	GL45	ea.
SP-A3845PP	PP	GL38	GL45	ea.
SP-A4045PTFE	PTFE	GL40	GL45	ea.
SP-A4045PP	PP	GL40	GL45	ea.
SP-A454545	PP	GL45	2 x GL45	ea.
SP-A4545X4	PP	GL45	4 x GL45	ea.



to different Threads/Caps

Part No.	Material	Thread (female)	Thread (male)	Qty.
SP-A4032PP	PP	GL40	GL32	ea.
SP-A4038PP	PP	GL40	GL38	ea.
SP-A4532PP	PP	GL45	GL32	ea.
SP-A4538PP	PP	GL45	GL38	ea.
SP-A4555PP	PP	GL45	S55	ea.
SP-A5560PP	PP	S55	S60	ea.
SP-A5590PP	PP	S55	S90	ea.
SP-A6090PP	PP	S60	S90	ea.



Safety Funnels

www.bgb-shop.com/safety-funnel

Fittings, Nuts, Ferrules and Plugs for BGB Safety Products



Fittings 1/16"

Part No.	Type	Color	Qty.
SP-NOPBLK16	Fitting One-Piece	Black	pk.5
SP-NOPVIO16	Fitting One-Piece	Purple	pk.5
SP-NBLK16	Nut	Black	pk.10
SP-NBLU16	Nut	Blue	pk.10
SP-NGRE16	Nut	Green	pk.10
SP-NVIO16	Nut	Purple	pk.10
SP-NRED16	Nut	Red	pk.10
SP-NF16	Ferrule 1/16" OD Tubing	Blue	pk.10

Fittings 1/8"

Part No.	Type	Color	Qty.
SP-NOPBLK18	Fitting One-Piece	Black	pk.5
SP-NOPVIO18	Fitting One-Piece	Purple	pk.5
SP-NBLK18	Nut	Black	pk.10
SP-NBLU18	Nut	Blue	pk.10
SP-NGRE18	Nut	Green	pk.10
SP-NVIO18	Nut	Purple	pk.10
SP-NRED18	Nut	Red	pk.10
SP-NF18	Ferrule 1/8" OD Tubing	Yellow	pk.10



Nuts & Ferrules 3/16"

Part No.	Type	Color	Qty.
SP-NWHI316	Nut	White	ea.
SP-NF316	Ferrule	Blue	ea.




Plugs

Part No.	Type	Color	Qty.
SP-NP18	for 1/8"-Tubing Port	Black	pk.10
SP-NPFIL	for Safety-Waste-Filter Port	Black	ea.
SP-NPBAR	for Barbed Tubing Port	Black	pk.5
SP-NP14	for 1/4"-Tubing Port	Black	ea.



23s-26s Dual Gauge Tapered Needle



- ⇒ Split/Splitless or On-Column injections
- ⇒ Versatility without sacrificing durability
- ⇒ More solid needle than regular 26s
- ⇒ Minimizes septum abrasion

23s Gauge Needle



- ⇒ Most durable needle
- ⇒ Merlin MicroSeal™ and standard septum injections
- ⇒ Packed column injections
- ⇒ Split/splitless injections

26s Gauge Needle



- ⇒ Fine gauge offers versatility
- ⇒ On-column injections
- ⇒ Split/splitless injections

Gauge Index Table

Gauge	Nominal OD mm*	Nominal ID mm*	Wall Thickness mm*	Volume μL/Inch
26s	0.474	0.127	0.35	0.322
26	0.464	0.260	0.20	1.349
25s	0.515	0.153	0.36	0.464
25	0.515	0.260	0.25	1.349
24	0.566	0.311	0.25	1.930
23s	0.642	0.116	0.53	0.268
23	0.642	0.337	0.30	2.266
22s	0.718	0.168	0.55	0.563
22	0.718	0.413	0.30	3.403
21	0.819	0.514	0.30	5.271
20	0.908	0.603	0.30	7.255
19	1.067	0.686	0.38	9.389

*mm are nominal

Plunger Tips

- PE-HD – with better durability than virginal PTFE when working with saline solutions
- PTFE – gas tight sealing of the plunger tip, for most solvents and chemicals
- PTFE NUB – PTFE compound with highest durability and chemical resistant combined with low electrostatic effects
- SS-Gold coated* – Gold coated stainless steel, developed for use with aggressive solvents (e.g. strong acids)

*regular SS plunger syringes are available as gold coated version on request

Syringe Terminations

FN - Fixed Needle



LT - Luer Tip (with Fixed Needle)



TLL/TLL-X - Teflon (PTFE) Luer Lock



RN - Removable Needle



LT - Luer Tip (without Needle)



1/4"-28 UNF



Needle Tip Styles

Type AS
and c



Special conical needle recommended for septum penetration (Autosampler Type).

Type a



Beveled needle is recommended for life science applications.

Type b



Blunt needle for use with HPLC-Injection valves and for sample pipetting.

Type d



Conical needle with side port is recommended for penetration of septa, thin-gauged vinyls and plastics without coring (Headspace GC).

SGE Hamilton

1 AS

2 4

3 3

5 5



Microsyringes 0.5 µl-10 µl – Needle Tip Style AS, Needle Length 42 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030151	0.5 µl	SS (In Needle)	RN	0.64 mm (23s)	ea.
SET-3030152	1 µl	SS (In Needle)	RN	0.64 mm (23s)	ea.
SET-3030129	5 µl	SS	RN	0.47 mm (26s)	ea.
SET-3030130	5 µl	SS	RN	0.64-0.47 mm (23s-26s)	ea.
SET-3030138	10 µl	SS	RN	0.64 mm (23s)	ea.
SET-3030137	10 µl	SS	RN	0.64-0.47 mm (23s-26s)	ea.
SET-3030166	10 µl	PTFE	RN	0.64 mm (23s)	ea.
SET-3030165	10 µl	PTFE	RN	0.64-0.47 mm (23s-26s)	ea.

SETonic Syringes for Agilent GC Autosampler - Fixed Needle



Microsyringes 5 µl-100 µl – Needle Tip Style AS, Needle Length 42 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030128	5 µl	SS	FN	0.64 mm (23s)	ea.
SET-3030133	5 µl	SS	FN	0.64 mm (23s)	pk.6
SET-3030127	5 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030132	5 µl	SS	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030126	5 µl	SS	FN	0.47 mm (26s)	ea.
SET-3030131	5 µl	SS	FN	0.47 mm (26s)	pk.6
SET-3030136	10 µl	SS	FN	0.64 mm (23s)	ea.
SET-3030141	10 µl	SS	FN	0.64 mm (23s)	pk.6
SET-3030135	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030140	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030134	10 µl	SS	FN	0.47 mm (26s)	ea.
SET-3030139	10 µl	SS	FN	0.47 mm (26s)	pk.6
SET-3030163	10 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-3030167	10 µl	PTFE	FN	0.47 mm (26s)	pk.6
SET-3030164	10 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030168	10 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030169	25 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030174	25 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030170	50 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030175	50 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030171	100 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030176	100 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.



Syringes 10 µl-5 ml – Needle Tip Style b, Needle Length 51 mm – **Type LC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2106424	10 µl	SS	FN	0.72 mm (G22s)	ea.
SET-LMK.2606416	10 µl	PTFE	FN	0.72 mm (G22s) with knop	ea.
SET-LMK.2620517	25 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620517-2P	25 µl	PTFE	FN	0.72 mm (G22s)	pk.2
SET-LMK.2620517-6P	25 µl	PTFE	FN	0.72 mm (G22s)	pk.6
SET-LMK.2620615	50 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-LMK.2620615-2P	50 µl	PTFE	FN	0.72 mm (G22)	pk.2
SET-LMK.2620615-6P	50 µl	PTFE	FN	0.72 mm (G22)	pk.6
SET-LMK.2620719	100 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620719-2P	100 µl	PTFE	FN	0.72 mm (G22s)	pk.2
SET-LMK.2620719-6P	100 µl	PTFE	FN	0.72 mm (G22s)	pk.6
SET-LMK.2620721	100 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-LMK.2620721-2P	100 µl	PTFE	FN	0.72 mm (G22)	pk.2
SET-LMK.2620721-6P	100 µl	PTFE	FN	0.72 mm (G22)	pk.6
SET-LMK.2620821	250 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620908	500 µl	PTFE	FN ¹⁾	0.72 mm (G22)	ea.
SET-LMK.2620011	1 ml	PTFE LT	FN ²⁾	0.72 mm (G22)	ea.
SET-LMK.2620054	5 ml	PTFE LT	FN ²⁾	1.10 mm (G19)	ea.

1) Needle Length 56 mm 2) Needle Length 57 mm

L-MARK® Syringes for CTC Combi PAL GC Autosampler

Syringes 1.2 µl-500 µl – Needle Tip Style AS, Needle Length 51 mm – **Type GC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2220001	1.2 µl	SS	FN	0.48 mm (G26P)	ea.
SET-LMK.2220001-6P	1.2 µl	SS	FN	0.48 mm (G26P)	pk.6
SET-LMK.2106303	5 µl	SS	FN	0.64 mm (G23s)	ea.
SET-LMK.2106302	5 µl	SS	FN	0.47 mm (G26s)	ea.
SET-LMK.2106403	10 µl	SS	FN	0.64 mm (G23s)	ea.
SET-LMK.2106426	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-LMK.2106416	10 µl	SS	FN	0.47 mm (G26s)	ea.
SET-LMK.2106416-2P	10 µl	SS	FN	0.47 mm (G26s)	pk.2
SET-LMK.2106416-6P	10 µl	SS	FN	0.47 mm (G26s)	pk.6
SET-LMK.2606407	10 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-LMK.2606403	10 µl	PTFE	FN	0.64 mm (G23s)	ea.
SET-LMK.2620706	100 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-LMK.2620706-2P	100 µl	PTFE	FN	0.47 mm (G26s)	pk.2
SET-LMK.2620706-6P	100 µl	PTFE	FN	0.47 mm (G26s)	pk.6
SET-LMK.2620803	250 µl	PTFE	FN	0.47 mm (G26)	ea.
SET-LMK.2620903	500 µl	PTFE	FN	0.47 mm (G26)	ea.



Syringes 10 µl-1 ml – Needle Tip Style AS, Needle Length 57 mm – **Type GC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2116405	10 µl	SS	FN	0.64 mm (23s)	ea.
SET-LMK.2116404	10 µl	SS	FN	0.47 mm (26s)	ea.
SET-LMK.2116406	10 µl	SS	FN ¹⁾	0.47 mm (26s)	ea.
SET-LMK.2616405	10 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-LMK.2616404	10 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616703	100 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616803	250 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616804	250 µl	PTFE	FN ¹⁾	0.47 mm (26s)	ea.
SET-LMK.2616003	1 ml	PTFE	FN	0.64 mm (23s)	ea.

1) Needle Length 85 mm

Syringes 10 µl-1 ml – Needle Tip Style b, Needle Length 57 mm – **Type LC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2616422	10 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616502C	25 µl	PTFE	FN	0.72 mm (G22s) coated ²⁾	ea.
SET-LMK.2616702C	100 µl	PTFE	FN	0.72 mm (G22s) coated ²⁾	ea.
SET-LMK.2616704C	100 µl	PTFE	FN	0.72 mm (G22) coated ²⁾	ea.
SET-LMK.2616822	250 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616922	500 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616012	1 ml	PTFE	FN	0.72 mm (G22s)	ea.

2) hydrophobic, oleophobic coated syringe needle

SETonic Syringes for Spark Holland Autosamplers

The SETonic Syringes for Spark Holland Autosamplers work with the following manufacturers autosamplers:

- Spark Holland Midas, Triathlon, Endurance and Alias
- Beckmann Coulter 508
- Antec AS 100 and AS 110
- Grace/Alltech Model 580
- Dionex ESA Model 542, 540 and 540MT
- Agilent Pro Star



Part No.	Volume	Plunger Type	Syringe Termination	Qty.
SET-3010083	25 µl	PTFE	1/4" -28 UNF	ea.
SET-3010084	50 µl	PTFE	1/4" -28 UNF	ea.
SET-3010085	100 µl	PTFE	1/4" -28 UNF	ea.
SET-3010086	250 µl	PTFE	1/4" -28 UNF	ea.
SET-3010087	500 µl	PTFE	1/4" -28 UNF	ea.
SET-3010088	1 ml	PTFE	1/4" -28 UNF	ea.
SET-3010089	2.5 ml	PTFE	1/4" -28 UNF	ea.



TLL Syringes 25 µl-25 ml, Standard Plunger

Part No.	Volume	Plunger Type	Termination	Qty.
SET-3010299	25 µl	PTFE	Luer Lock	ea.
SET-3010300	50 µl	PTFE	Luer Lock	ea.
SET-3010317	100 µl	PTFE	Luer Lock	ea.
SET-3010318	250 µl	PTFE	Luer Lock	ea.
SET-3010319	500 µl	PTFE	Luer Lock	ea.
SET-3010175	1 ml	PTFE	Luer Lock	ea.
SET-3010176	2.5 ml	PTFE	Luer Lock	ea.
SET-3010177	5 ml	PTFE	Luer Lock	ea.
SET-3010179	25 ml	PTFE	Luer Lock	ea.

TLL-X Syringes 25 µl-10 ml, Plunger with 6-32UNC inside thread to allow attachment to drive arm mechanism

Part No.	Volume	Plunger Type	Termination	Qty.
SET-3010262	25 µl	PTFE	Luer Lock	ea.
SET-3010263	50 µl	PTFE	Luer Lock	ea.
SET-3010264	100 µl	PTFE	Luer Lock	ea.
SET-3010265	250 µl	PTFE	Luer Lock	ea.
SET-3010266	500 µl	PTFE	Luer Lock	ea.
SET-3010267	1 ml	PTFE	Luer Lock	ea.
SET-3010268	2.5 ml	PTFE	Luer Lock	ea.
SET-3010269	5 ml	PTFE	Luer Lock	ea.
SET-3010270	10 ml	PTFE	Luer Lock	ea.

Gas Tight Microsyringes – Fixed Needle



Syringes 5 µl-500 µl - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030241	5 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-3030242	10 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-3030243	25 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030244	50 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030245	100 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030246	250 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-3030247	500 µl	PTFE	FN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes 1 ml-10 ml

Part No.	Volume	Needle	OD (Gauge)	Needle Length	Point Style	Qty.
SET-3030249	1 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030248	1 ml	FN	0.64 mm (G23)	51 mm	a	ea.
SET-3030186*	1 ml	FN	0.64 mm (G23)	51 mm	d	ea.
SET-3030250	2.5 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030154	2.5 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030187*	2.5 ml	FN	0.64 mm (G23)	51 mm	d	ea.
SET-3030251	5 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030155	5 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030188*	5 ml	FN	0.64 mm (G23)	56 mm	d	ea.
SET-3030252	10 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030156	10 ml	FN	0.72 mm (G22)	51 mm	a	ea.

* High temperature syringes up to 120°C.

Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Gas Tight Syringes – Removable Needle



Microsyringes 5 µl-10 ml - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030544	5 µl	PTFE	RN	0.47 mm (G26s)	ea.
SET-3030676	10 µl	PTFE	RN	0.47 mm (G26s)	ea.
SET-3030604	25 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030605	50 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030606	100 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030366	250 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030607	500 µl	PTFE	RN	0.72 mm (G22)	ea.
SET-3030368	1 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030672	2.5 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030673	5 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030674	10 ml	PTFE	RN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Replacement Needles – Needle Tip Style a*, Needle Length 51 mm



Part No.	for Syringe Volume	OD (Gauge)	Qty.
SET-3050072	5 µl	0.47 mm (G26s)	pk.3
SET-3050022	10 µl	0.47 mm (G26s)	pk.3
SET-3050179	25 µl–10 ml	0.72 mm (G22)	pk.3
SET-3050036	25 µl–10 ml	0.72 mm (G22s)	pk.3

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes Fixed Needle 5 µl-500 µl - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030205	5 µl	SS	FN	0.47 mm (G26s)	ea.
SET-3030206	10 µl	SS	FN	0.47 mm (G26s)	ea.
SET-3030207	25 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030208	50 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030209	100 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030210	250 µl	SS	FN	0.72 mm (G22)	ea.
SET-3030211	500 µl	SS	FN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes Removable Needle 5 µl-500 µl – Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030389	5 µl	SS	RN	0.47 mm (G26s)	ea.
SET-3030298	10 µl	SS	RN	0.47 mm (G26s)	ea.
SET-3030299	25 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030300	50 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030301	100 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030302	250 µl	SS	RN	0.72 mm (G22)	ea.
SET-3030303	500 µl	SS	RN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Replacement Needles – Needle Tip Style a*, Needle Length 51mm





Part No.	for Syringe Volume	OD (Gauge)	Qty.
SET-3050072	5 µl	0.47 mm (G26s)	pk.3
SET-3050022	10 µl	0.47 mm (G26s)	pk.3
SET-3050179	25 µl–10 ml	0.72 mm (G22)	pk.3
SET-3050036	25 µl–10 ml	0.72 mm (G22s)	pk.3

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

BGB Purification – Cartridge Hardware

Standard Sizes (Spin-Welded Technology)

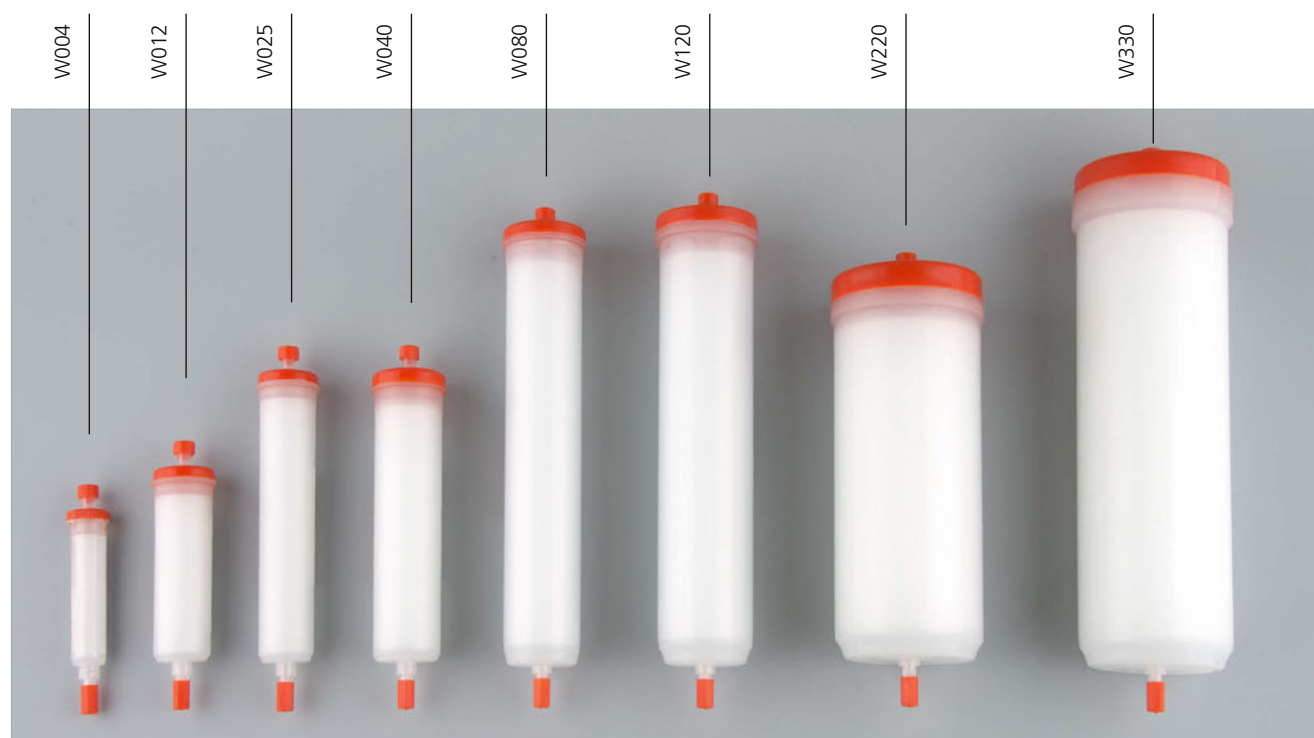

Hardware Parameters

Hardware Type	Inner Diameter	Bed Length	Column Volume	Max. Pressure	Frits Polyethylene	50µm Particle Size	30µm Particle Size
W004	12.4 mm	56 mm	5.1 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W012	21.4 mm	73 mm	19.7 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W025	21.4 mm	123.5 mm	33.3 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W040	26.7 mm	117.6 mm	49.4 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W080	31.2 mm	185 mm	106 ml	24.0 bar (350 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W120	38.6 mm	189 mm	165.8 ml	20.5 bar (300 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W220	61.4 mm	139.5 mm	309.6 ml	20.5 bar (300 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W330	61.4 mm	199.2 mm	442.1 ml	17.0 bar (250 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm



Hardware Parameters

Hardware Type	Inner Diameter	Bed Length	Column Volume	Max. Pressure	Frits Polyethylene	50 µm Particle Size	30 µm Particle Size
S0800	78.2mm	313.3mm	1128ml	6.9bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
S1600	103.8mm	353.7mm	2244ml	6.9bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
S3000	127.5mm	418.0mm	4000ml	6.9bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm

Analytical & Preparative HPLC Columns



BGB analytical & preparative HPLC columns have been designed to offer you the easiest way to develop your reversed phase methods and to scale-up your purifications with strictly the same material in term of stationary phase, particle size and pore size. All bonded phases are available in classical stainless steel analytical HPLC columns (4.6 x 150 mm and 4.6 x 250 mm), preparative HPLC columns (I.D. from 21.2 to 50 mm) and plastic flash cartridges (4 g to 3 kg of phase) to offer you a large choice of possibilities in term of development and scale-up.

Because of the use of standard 10–32 fittings, BGB HPLC columns are compatible with all HPLC systems on the market.



Features include

- High quality SS analytical columns with dimensions of 4.6 x 150 mm and/or 4.6 x 250 mm.
- Preparative HPLC columns with I.D. from 21.2 mm to 50.0 mm.
- Strictly similar bonded phases as those used for our flash cartridges for easy scale-up.
- Available in Scorpius C18, Aquarius C18AQ, Taurus C18T, Taurus C8T and Taurus C4T.
- Dedicated Taurus 300 Å wide pore materials for peptides and proteins purification.
- Particle size of 5 µm, 10 µm, 15 µm and 30 µm.
- Compatible with all HPLC systems on the market.

Column parameters

Hardware	Thread	Inner Diameter	Length	Max. Pressure	Frits
Analytical	10–32	4.6 mm	150 mm	480 bar (7'000 psi)	2 µm
			250 mm		
Semi preparative	10–32	21.2 mm	150 mm	400 bar (6'000 psi)	2 µm
			250 mm		
Preparative	10–32	30.0 mm 50.0 mm	150 mm	400 bar (6'000 psi)	2 µm
			250 mm		

Column certificate

All BGB HPLC columns are individually tested to ensure a high quality and reproducibility from column to column and lot to lot. Each column is delivered with its own analysis report and wear a sticker indicating part number, column type, dimensions, serial number and flow direction.




Bulk Material


Additionally to our HPLC columns and our flash cartridges, BGB Analytik proposes also the possibility to order the spherical bulk materials bonded phases for Scorpius C18, Aquarius C18AQ, Taurus C18T, Taurus C8T and Taurus C4T. In boxes of 100 g or 1 kg, all these phases are available in 5 µm, 10 µm or 30 µm particle size. Combined with our empty flash cartridge portfolio, it offers you the possibility to pack your own column or to have the right phase to make your dry load. It allows you also the possibility to pack your own preparative columns with all self-packing instruments available on the market.



BGB Selection Guide

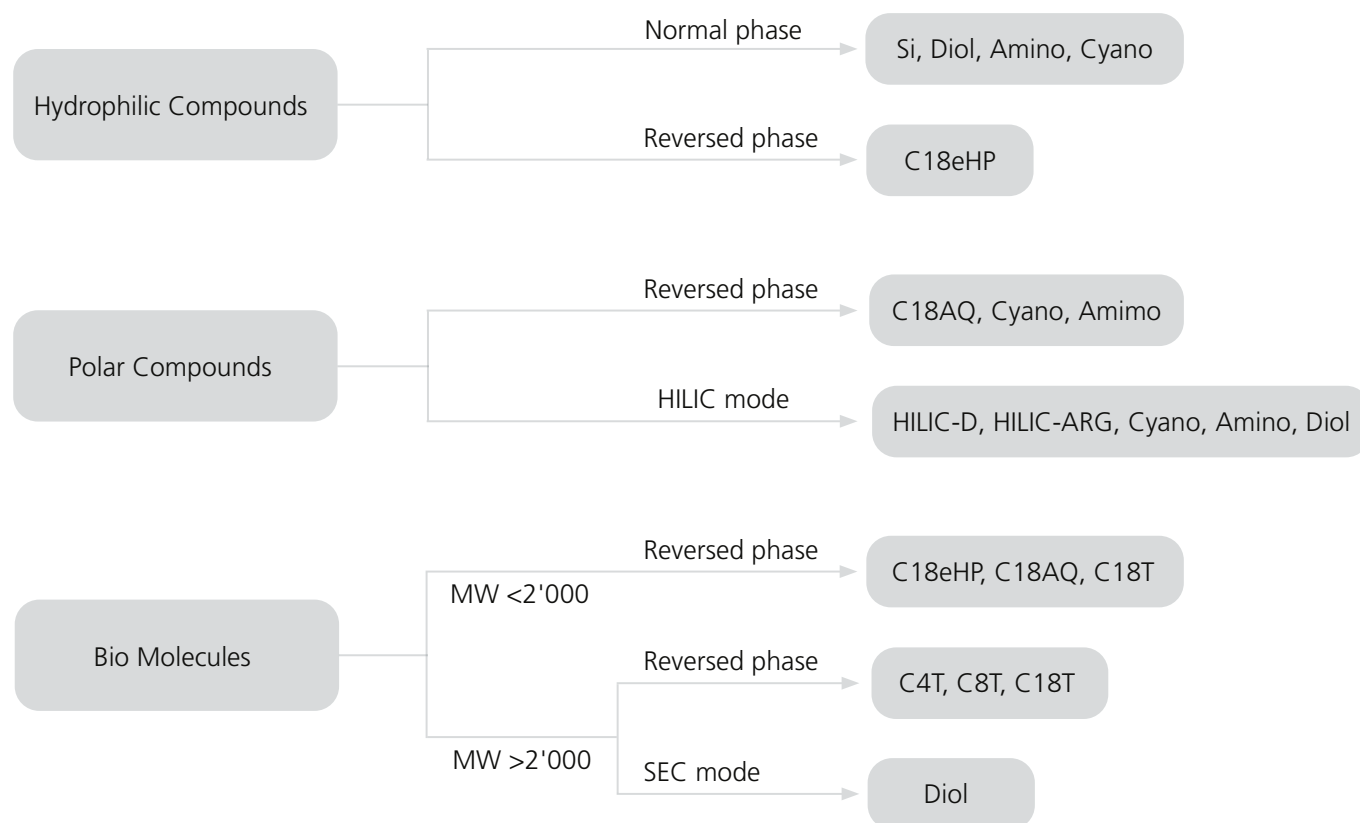

BGB Scorpion Silica



Phase:	Irregular Ultra-Pure Silica	
Particle Size:	30 µm	50 µm
Pore Size:	60 Å	60 Å
Surface Area:	500 m ² /g	500 m ² /g
Endcapped:	n.a.	n.a.
Carbon Load:	n.a.	n.a.
pH Range:	2–8	2–8



BGB Scorpion Silica (Si) Flash Cartridges

Part No.	Description	Qty.
BSS2AF-W004	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 4 g	pk.20
BSS2AF-W012	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 12 g	pk.18
BSS2AF-W025	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 25 g	pk.12
BSS2AF-W040	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 40 g	pk.12
BSS2AF-W080	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 80 g	pk.10
BSS2AF-W120	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 120 g	pk.10
BSS2AF-W220	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 220 g	pk.6
BSS2AF-W330	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 330 g	pk.5
BSS2AF-S0800	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 800 g	ea.
BSS2AF-S1600	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 1.6 kg	ea.
BSS2AF-S3000	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 3 kg	ea.



Part No.	Description	Qty.
BSS2CF-W004	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 4 g	pk.20
BSS2CF-W012	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 12 g	pk.18
BSS2CF-W025	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 25 g	pk.12
BSS2CF-W040	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 40 g	pk.12
BSS2CF-W080	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 80 g	pk.10
BSS2CF-W120	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 120 g	pk.10
BSS2CF-W220	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 220 g	pk.6
BSS2CF-W330	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 330 g	pk.5
BSS2CF-S0800	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 800 g	ea.
BSS2CF-S1600	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 1.6 kg	ea.
BSS2CF-S3000	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 3 kg	ea.




ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.



Empty Flash column hardware
see page 119

BGB Scorpius C18e-HP

	Phase:	Spherical Ultra-Pure C18 monomeric bonded				
	Particle Size:	5 µm	10 µm	15 µm	30 µm	50 µm
	Pore Size:	100 Å	100 Å	100 Å	100 Å	120 Å
	Surface Area:	320 m ² /g	320 m ² /g	320 m ² /g	320 m ² /g	300 m ² /g
	Endcapped:	yes	yes	yes	yes	yes
	Carbon Load:	17 %	17 %	17 %	17 %	17 %
	pH Range:	2–8	2–8	2–8	2–8	2–8



BGB Scorpius C18e-HP Flash Cartridges

Part No.	Description	Qty.
BSE1AF-W004	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSE1AF-W012	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 20 g	ea.
BSE1AF-W025	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 33 g	ea.
BSE1AF-W040	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 48 g	ea.
BSE1AF-W080	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 105 g	ea.
BSE1AF-W120	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 155 g	ea.
BSE1AF-W220	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSE1AF-W330	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 420 g	ea. ⚠
BSE1AF-S0800	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 1.08 kg	ea. ⚠
BSE1AF-S1600	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 2.14 kg	ea. ⚠
BSE1AF-S3000	BGB Scorpius Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 3.83 kg	ea. ⚠



Part No.	Description	Qty.
BSC1CF-W004	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 4.5 g	pk.2
BSC1CF-W012	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 18 g	ea.
BSC1CF-W025	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 28 g	ea.
BSC1CF-W040	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 40 g	ea.
BSC1CF-W080	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 90 g	ea.
BSC1CF-W120	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 130 g	ea.
BSC1CF-W220	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 245 g	ea. ⚠
BSC1CF-W330	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 350 g	ea. ⚠
BSC1CF-S0800	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 900 g	ea. ⚠
BSC1CF-S1600	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 1.78 kg	ea. ⚠
BSC1CF-S3000	BGB Scorpius Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 3.2 kg	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.



Adapters for Luer Ports
see page 78

BGB Scorpion C18e-HP Bulk Material

Part No.	Description	Qty.
BSE1IB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 5 µm, 100 g	ea.
BSE1IB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 5 µm, 1 kg	ea.
BSE1JB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 10 µm, 100 g	ea.
BSE1JB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 10 µm, 1 kg	ea.
BSE1KB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 15 µm, 100 g	ea.
BSE1KB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 15 µm, 1 kg	ea.
BSE1AB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 30 µm, 100 g	ea.
BSE1AB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 30 µm, 1 kg	ea.




BGB Scorpion C18e-HP HPLC Columns

Part No.	Description	Qty.
BSE1ICO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 4.6 x 150 mm	ea.
BSE1ICO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 4.6 x 250 mm	ea.
BSE1ICO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 21.2 x 150 mm	ea.
BSE1ICO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 21.2 x 250 mm	ea.
BSE1JCO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 4.6 x 150 mm	ea.
BSE1JCO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 4.6 x 250 mm	ea.
BSE1JCO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 21.2 x 150 mm	ea.
BSE1JCO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 21.2 x 250 mm	ea.
BSE1JCO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 30.0 x 150 mm	ea.
BSE1JCO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 30.0 x 250 mm	ea.
BSE1JCO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 50.0 x 150 mm	ea.
BSE1JCO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 50.0 x 250 mm	ea.
BSE1KCO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 4.6 x 150 mm	ea.
BSE1KCO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 4.6 x 250 mm	ea.
BSE1KCO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 21.2 x 150 mm	ea.
BSE1KCO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 21.2 x 250 mm	ea.
BSE1KCO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 30.0 x 150 mm	ea.
BSE1KCO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 30.0 x 250 mm	ea.
BSE1KCO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 50.0 x 150 mm	ea.
BSE1KCO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 50.0 x 250 mm	ea.
BSE1ACO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 4.6 x 150 mm	ea.
BSE1ACO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 4.6 x 250 mm	ea.
BSE1ACO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 21.2 x 150 mm	ea.
BSE1ACO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 21.2 x 250 mm	ea.
BSE1ACO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 30.0 x 150 mm	ea.
BSE1ACO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 30.0 x 250 mm	ea.
BSE1ACO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 50.0 x 150 mm	ea.
BSE1ACO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 119

BGB Aquarius C18AQ (Polar Endcapped)



Phase:	Spherical Ultra-Pure C18 monomeric bonded polar endcapped			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	100 Å	100 Å	100 Å	100 Å
Surface Area:	320 m ² /g	320 m ² /g	320 m ² /g	320 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	10 %	10 %	10 %	10 %
pH Range:	2–8	2–8	2–8	2–8



BGB Aquarius C18AQ Flash Cartridges

Part No.	Description	Qty.
BAC5KF-W004	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 5.4 g	pk.2
BAC5KF-W012	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 20 g	ea.
BAC5KF-W025	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 33 g	ea.
BAC5KF-W040	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 48 g	ea.
BAC5KF-W080	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 105 g	ea.
BAC5KF-W120	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 155 g	ea.
BAC5KF-W220	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 290 g	ea. ⚠
BAC5KF-W330	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 410 g	ea. ⚠
BAC5KF-S0800	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 1.05 kg	ea. ⚠
BAC5KF-S1600	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 2.09 kg	ea. ⚠
BAC5KF-S3000	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 3.75 kg	ea. ⚠



Part No.	Description	Qty.
BAC5AF-W004	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 5.4 g	pk.2
BAC5AF-W012	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 20 g	ea.
BAC5AF-W025	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 33 g	ea.
BAC5AF-W040	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 48 g	ea.
BAC5AF-W080	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 105 g	ea.
BAC5AF-W120	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 155 g	ea.
BAC5AF-W220	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BAC5AF-W330	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 420 g	ea. ⚠
BAC5AF-S0800	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 1.08 kg	ea. ⚠
BAC5AF-S1600	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 2.14 kg	ea. ⚠
BAC5AF-S3000	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 3.83 kg	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Aquarius C18AQ Bulk Material

Part No.	Description	Qty.
BAC5IB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 5 µm, 100 g	ea.
BAC5IB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 5 µm, 1 kg	ea.
BAC5JB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 10 µm, 100 g	ea.
BAC5JB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 10 µm, 1 kg	ea.
BAC5KB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 15 µm, 100 g	ea.
BAC5KB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 15 µm, 1 kg	ea.
BAC5AB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 30 µm, 100 g	ea.
BAC5AB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 30 µm, 1 kg	ea.



BGB Aquarius C18AQ HPLC Columns

Part No.	Description	Qty.
BAC5ICO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 4.6 x 150 mm	ea.
BAC5ICO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 4.6 x 250 mm	ea.
BAC5ICO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 21.2 x 150 mm	ea.
BAC5ICO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 21.2 x 250 mm	ea.
BAC5JCO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 4.6 x 150 mm	ea.
BAC5JCO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 4.6 x 250 mm	ea.
BAC5JCO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 21.2 x 150 mm	ea.
BAC5JCO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 21.2 x 250 mm	ea.
BAC5JCO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 30.0 x 150 mm	ea.
BAC5JCO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 30.0 x 250 mm	ea.
BAC5JCO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 50.0 x 150 mm	ea.
BAC5JCO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 50.0 x 250 mm	ea.
BAC5KCO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 4.6 x 150 mm	ea.
BAC5KCO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 4.6 x 250 mm	ea.
BAC5KCO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 21.2 x 150 mm	ea.
BAC5KCO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 21.2 x 250 mm	ea.
BAC5KCO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 30.0 x 150 mm	ea.
BAC5KCO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 30.0 x 250 mm	ea.
BAC5KCO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 50.0 x 150 mm	ea.
BAC5KCO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 50.0 x 250 mm	ea.
BAC5ACO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 4.6 x 150 mm	ea.
BAC5ACO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 4.6 x 250 mm	ea.
BAC5ACO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 21.2 x 150 mm	ea.
BAC5ACO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 21.2 x 250 mm	ea.
BAC5ACO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 30.0 x 150 mm	ea.
BAC5ACO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 30.0 x 250 mm	ea.
BAC5ACO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 50.0 x 150 mm	ea.
BAC5ACO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 119

BGB Taurus C18T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C18 polymeric bonded			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	10 %	10 %	10 %	10 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7




BGB Taurus C18T Flash Cartridges

Part No.	Description	Qty.
BTW6KF-W004	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 4.5 g	pk.2
BTW6KF-W012	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 16 g	ea.
BTW6KF-W025	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 26 g	ea.
BTW6KF-W040	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 38 g	ea.
BTW6KF-W080	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 82 g	ea.
BTW6KF-W120	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 120 g	ea.
BTW6KF-W220	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 225 g	ea. ⚠
BTW6KF-W330	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 15 µm, 320 g	ea. ⚠



Part No.	Description	Qty.
BTW6AF-W004	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 4.5 g	pk.2
BTW6AF-W012	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 16 g	ea.
BTW6AF-W025	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 26 g	ea.
BTW6AF-W040	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 38 g	ea.
BTW6AF-W080	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 82 g	ea.
BTW6AF-W120	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 120 g	ea.
BTW6AF-W220	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 225 g	ea. ⚠
BTW6AF-W330	BGB Taurus Flash Cartridge, C18T 300Å, Spherical 30 µm, 320 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C18T Bulk Material

Part No.	Description	Qty.
BTW6IB-K1	BGB Taurus Bulk Material, C18T 300 Å, 5 µm, 100 g	ea.
BTW6IB-K4	BGB Taurus Bulk Material, C18T 300 Å, 5 µm, 1 kg	ea.
BTW6JB-K1	BGB Taurus Bulk Material, C18T 300 Å, 10 µm, 100 g	ea.
BTW6JB-K4	BGB Taurus Bulk Material, C18T 300 Å, 10 µm, 1 kg	ea.
BTW6KB-K1	BGB Taurus Bulk Material, C18T 300 Å, 15 µm, 100 g	ea.
BTW6KB-K4	BGB Taurus Bulk Material, C18T 300 Å, 15 µm, 1 kg	ea.
BTW6AB-K1	BGB Taurus Bulk Material, C18T 300 Å, 30 µm, 100 g	ea.
BTW6AB-K4	BGB Taurus Bulk Material, C18T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C18T HPLC Columns

Part No.	Description	Qty.
BTW6ICO-1505	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW6ICO-2505	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW6ICO-1520	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW6ICO-2520	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW6JCO-1505	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW6JCO-2505	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW6JCO-1520	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW6JCO-2520	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW6JCO-1530	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW6JCO-2530	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW6JCO-1550	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW6JCO-2550	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW6KCO-1505	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW6KCO-2505	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW6KCO-1520	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW6KCO-2520	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW6KCO-1530	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW6KCO-2530	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW6KCO-1550	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW6KCO-2550	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW6ACO-1505	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW6ACO-2505	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW6ACO-1520	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW6ACO-2520	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW6ACO-1530	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW6ACO-2530	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW6ACO-1550	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW6ACO-2550	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 119

BGB Taurus C8T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C8 polymeric bonded			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	5 %	5 %	5 %	5 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7



BGB Taurus C8T Flash Cartridges

Part No.	Description	Qty.
BTW0KF-W004	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 4.5 g	pk.2
BTW0KF-W012	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 16 g	ea.
BTW0KF-W025	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 26 g	ea.
BTW0KF-W040	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 38 g	ea.
BTW0KF-W080	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 82 g	ea.
BTW0KF-W120	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 120 g	ea.
BTW0KF-W220	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 225 g	ea. ⚠
BTW0KF-W330	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 320 g	ea. ⚠



Part No.	Description	Qty.
BTW0AF-W004	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 4.5 g	pk.2
BTW0AF-W012	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 16 g	ea.
BTW0AF-W025	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 26 g	ea.
BTW0AF-W040	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 38 g	ea.
BTW0AF-W080	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 82 g	ea.
BTW0AF-W120	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 120 g	ea.
BTW0AF-W220	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 225 g	ea. ⚠
BTW0AF-W330	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 320 g	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C8T Bulk Material

Part No.	Description	Qty.
BTW0IB-K1	BGB Taurus Bulk Material, C8T 300 Å, 5 µm, 100 g	ea.
BTW0IB-K4	BGB Taurus Bulk Material, C8T 300 Å, 5 µm, 1 kg	ea.
BTW0JB-K1	BGB Taurus Bulk Material, C8T 300 Å, 10 µm, 100 g	ea.
BTW0JB-K4	BGB Taurus Bulk Material, C8T 300 Å, 10 µm, 1 kg	ea.
BTW0KB-K1	BGB Taurus Bulk Material, C8T 300 Å, 15 µm, 100 g	ea.
BTW0KB-K4	BGB Taurus Bulk Material, C8T 300 Å, 15 µm, 1 kg	ea.
BTW0AB-K1	BGB Taurus Bulk Material, C8T 300 Å, 30 µm, 100 g	ea.
BTW0AB-K4	BGB Taurus Bulk Material, C8T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C8T HPLC Columns

Part No.	Description	Qty.
BTW0ICO-1505	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW0ICO-2505	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW0ICO-1520	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW0ICO-2520	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW0JCO-1505	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW0JCO-2505	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW0JCO-1520	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW0JCO-2520	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW0JCO-1530	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW0JCO-2530	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW0JCO-1550	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW0JCO-2550	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW0KCO-1505	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW0KCO-2505	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW0KCO-1520	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW0KCO-2520	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW0KCO-1530	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW0KCO-2530	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW0KCO-1550	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW0KCO-2550	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW0ACO-1505	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW0ACO-2505	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW0ACO-1520	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW0ACO-2520	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW0ACO-1530	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW0ACO-2530	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW0ACO-1550	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW0ACO-2550	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 119

BGB Taurus C4T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C4 polymeric bonded			
Particle Size:	5 μm	10 μm	15 μm	30 μm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	3 %	3 %	3 %	3 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7




BGB Taurus C4T Flash Cartridges

Part No.	Description	Qty.
BTW1KF-W004	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 4.5 g	pk.2
BTW1KF-W012	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 16 g	ea.
BTW1KF-W025	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 26 g	ea.
BTW1KF-W040	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 38 g	ea.
BTW1KF-W080	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 82 g	ea.
BTW1KF-W120	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 120 g	ea.
BTW1KF-W220	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 225 g	ea.
BTW1KF-W330	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 μm , 320 g	ea.



Part No.	Description	Qty.
BTW1AF-W004	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 4.5 g	pk.2
BTW1AF-W012	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 16 g	ea.
BTW1AF-W025	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 26 g	ea.
BTW1AF-W040	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 38 g	ea.
BTW1AF-W080	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 82 g	ea.
BTW1AF-W120	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 120 g	ea.
BTW1AF-W220	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 225 g	ea.
BTW1AF-W330	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 μm , 320 g	ea.



ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C4T Bulk Material

Part No.	Description	Qty.
BTW1IB-K1	BGB Taurus Bulk Material, C4T 300 Å, 5 µm, 100 g	ea.
BTW1IB-K4	BGB Taurus Bulk Material, C4T 300 Å, 5 µm, 1 kg	ea.
BTW1JB-K1	BGB Taurus Bulk Material, C4T 300 Å, 10 µm, 100 g	ea.
BTW1JB-K4	BGB Taurus Bulk Material, C4T 300 Å, 10 µm, 1 kg	ea.
BTW1KB-K1	BGB Taurus Bulk Material, C4T 300 Å, 15 µm, 100 g	ea.
BTW1KB-K4	BGB Taurus Bulk Material, C4T 300 Å, 15 µm, 1 kg	ea.
BTW1AB-K1	BGB Taurus Bulk Material, C4T 300 Å, 30 µm, 100 g	ea.
BTW1AB-K4	BGB Taurus Bulk Material, C4T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C4T HPLC Columns

Part No.	Description	Qty.
BTW1ICO-1505	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW1ICO-2505	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW1ICO-1520	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW1ICO-2520	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW1JCO-1505	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW1JCO-2505	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW1JCO-1520	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW1JCO-2520	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW1JCO-1530	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW1JCO-2530	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW1JCO-1550	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW1JCO-2550	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW1KCO-1505	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW1KCO-2505	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW1KCO-1520	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW1KCO-2520	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW1KCO-1530	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW1KCO-2530	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW1KCO-1550	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW1KCO-2550	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW1ACO-1505	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW1ACO-2505	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW1ACO-1520	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW1ACO-2520	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW1ACO-1530	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW1ACO-2530	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW1ACO-1550	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW1ACO-2550	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 119

BGB Scorpius Cyano and Diol




Phase:	Spherical Ultra-Pure Cyano (CN) bonded
Particle Size:	30 µm
Pore Size:	100 Å
Surface Area:	320 m ² /g
Endcapped:	yes
Carbon Load:	5.5 %
pH Range:	2–8



BGB Scorpius Cyano (CN) Flash Cartridges

Part No.	Description	Qty.
BSCNAF-W004	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSCNAF-W012	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 20 g	ea.
BSCNAF-W025	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 33 g	ea.
BSCNAF-W040	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 48 g	ea.
BSCNAF-W080	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 105 g	ea.
BSCNAF-W120	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 155 g	ea.
BSCNAF-W220	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSCNAF-W330	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 420 g	ea. ⚠



Phase:	Spherical Ultra-Pure Diol bonded
Particle Size:	30 µm
Pore Size:	100 Å
Surface Area:	320 m ² /g
Endcapped:	yes
Carbon Load:	5 %
pH Range:	2–8




BGB Scorpius Diol (OH) Flash Cartridges

Part No.	Description	Qty.
BSOHAF-W004	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSOHAF-W012	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 20 g	ea.
BSOHAF-W025	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 33 g	ea.
BSOHAF-W040	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 48 g	ea.
BSOHAF-W080	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 105 g	ea.
BSOHAF-W120	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 155 g	ea.
BSOHAF-W220	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSOHAF-W330	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 420 g	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Scorpion Amino



Phase:	Irregular Ultra-Pure Amino bonded
Particle Size:	50 µm
Pore Size:	60 Å
Surface Area:	500 m ² /g
Endcapped:	yes
Carbon Load:	5 %
pH Range:	2–8



BGB Scorpion Amino (NH₂) Flash Cartridges

Part No.	Description	Qty.
BSNHAF-W004	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 5.9 g	pk.2
BSNHAF-W012	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 23 g	ea.
BSNHAF-W025	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 38 g	ea.
BSNHAF-W040	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 55 g	ea.
BSNHAF-W080	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 122 g	ea.
BSNHAF-W120	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 180 g	ea.
BSNHAF-W220	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 340 g	ea. ⚠
BSNHAF-W330	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 475 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

Luer Adapter Kit




These adapters (stainless steel Luer Lock inlet and PEEK Luer outlet) have to be used with BGB column hardware S800, S1600 and S3000. They can be connected to any kind of Luer connection.

Part No.	Description	Qty.
BSLK	BGB Luer adapter kit (inlet & outlet) for S800, S1600 and S3000 cartridge hardware	ea.



Empty Flash column hardware
see page 119

BGB Aquarius HILIC-D and HILIC-ARG


	Phase:	Spherical Ultra-Pure proprietary bonded
	Particle Size:	30 µm
	Pore Size:	100 Å
	Surface Area:	320 m ² /g
	Endcapped:	yes
	Carbon Load:	5 %
	pH Range:	2–8



BGB Aquarius HILIC-D Flash Cartridges

Part No.	Description	Qty.
BAHDAF-W004	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 5.4g	pk.2
BAHDAF-W012	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 20g	ea.
BAHDAF-W025	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 33g	ea.
BAHDAF-W040	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 48g	ea.
BAHDAF-W080	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 105g	ea.
BAHDAF-W120	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 155g	ea.
BAHDAF-W220	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 300g	ea. 
BAHDAF-W330	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 420g	ea. 



	Phase:	Spherical Ultra-Pure Arginine Bonded Silica
	Particle Size:	30 µm
	Pore Size:	100 Å
	Surface Area:	320 m ² /g
	Endcapped:	yes
	Carbon Load:	8 %
	pH Range:	2–8




BGB Aquarius HILIC-ARG Flash Cartridges

Part No.	Description	Qty.
BAHAAF-W004	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 5.4g	pk.2
BAHAAF-W012	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 20g	ea.
BAHAAF-W025	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 33g	ea.
BAHAAF-W040	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 48g	ea.
BAHAAF-W080	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 105g	ea.
BAHAAF-W120	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 155g	ea.
BAHAAF-W220	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 300g	ea. 
BAHAAF-W330	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 420g	ea. 



 **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Scorpius Alumina Acidic, Basic and Neutral



Phase:	Irregular Ultra-Pure Alumina
Particle Size:	60 µm
Pore Size:	55 Å
Surface Area:	155 m ² /g
Endcapped:	n.a.
Carbon Load:	n.a.




BGB Scorpius Alumina Acidic Flash Cartridges

Part No.	Description	Qty.
BSAADF-W004	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSAADF-W012	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSAADF-W025	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSAADF-W040	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSAADF-W080	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSAADF-W120	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSAADF-W220	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSAADF-W330	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSAADF-S0800	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSAADF-S1600	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSAADF-S3000	BGB Scorpius Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠



BGB Scorpius Alumina Basic Flash Cartridges

Part No.	Description	Qty.
BSABDF-W004	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSABDF-W012	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSABDF-W025	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSABDF-W040	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSABDF-W080	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSABDF-W120	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSABDF-W220	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSABDF-W330	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSABDF-S0800	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSABDF-S1600	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSABDF-S3000	BGB Scorpius Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠




BGB Scorpius Alumina Neutral Flash Cartridges

Part No.	Description	Qty.
BSANDF-W004	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSANDF-W012	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSANDF-W025	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSANDF-W040	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSANDF-W080	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSANDF-W120	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSANDF-W220	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSANDF-W330	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSANDF-S0800	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSANDF-S1600	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSANDF-S3000	BGB Scorpius Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB EZPack empty Flash Cartridges



BGB EZPack empty Flash Cartridges offer users convenience for self column packing but are also suitable for solid injection. In case of miscibility problems of compounds, this technic, also called dry load, is commonly used by chemists.

As for the complete range of BGB Flash Cartridges, BGB EZPack empty Flash Cartridges are done with an extra wall thickness. Reinforced body allows to work safely at higher pressure and ensure that the column is able to withstand the pressure capability of modern flash systems.

Features

- Body in pharmaceutical-grade polypropylene
- Reinforced cartridge, pressure up to 13.8 bar (200 psi)
- Luer/Luer Lock connectors are compatible with most flash chromatography systems
- Flexible sample loading
- 0 to 40°C




Hardware Parameters

Hardware Type	Inner Diameter**	Bed Length	Max. Pressure	Top Frit	Bottom Frit*
S0004	12.8mm	60mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0012	21.4mm	76mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0025	21.6mm	126mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0040	26.8mm	125mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0060	36.6mm	99mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0080	31.2mm	193mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0102	60.4mm	61mm	10.3 bar (150 psi)	20–25 µm	20–25 µm
S0120	36.6mm	204mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0220	60.6mm	131mm	10.3 bar (150 psi)	20–25 µm	20–25 µm
S0330	60.6mm	187mm	10.3 bar (150 psi)	20–25 µm	20–25 µm

* All frits are made of polyethylene (PE).

** Note that cartridges are slightly conical and that the given ID is an average value.

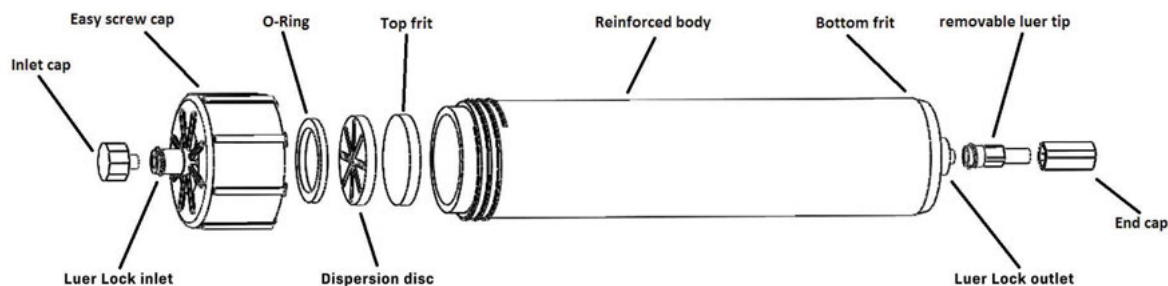

BGB EZPack empty Flash Cartridges

Part No.	Description	Qty.
BDL000F-S0004	EZPack Empty Flash Cartridge, Closed Top, complete, 4 g	pk.20
BDL000F-S0012	EZPack Empty Flash Cartridge, Closed Top, complete, 12 g	pk.18
BDL000F-S0025	EZPack Empty Flash Cartridge, Closed Top, complete, 25 g	pk.12
BDL000F-S0040	EZPack Empty Flash Cartridge, Closed Top, complete, 40 g	pk.12
BDL000F-S0060	EZPack Empty Flash Cartridge, Closed Top, complete, 60 g	pk.12
BDL000F-S0080	EZPack Empty Flash Cartridge, Closed Top, complete, 80 g	pk.10
BDL000F-S0102	EZPack Empty Flash Cartridge, Closed Top, complete, 100 g (Ver. II)	pk.6
BDL000F-S0120	EZPack Empty Flash Cartridge, Closed Top, complete, 120 g	pk.10
BDL000F-S0220	EZPack Empty Flash Cartridge, Closed Top, complete, 220 g	pk.6
BDL000F-S0330	EZPack Empty Flash Cartridge, Closed Top, complete, 330 g	pk.5



BGB EZPack top and bottom Frits*



Part No.	Description	Qty.
BTFEZPPE-S0004	Top Frit, PE, for EZPack Empty Flash Cartridge, 4 g	pk.100
BTFEZPPE-S0012	Top Frit, PE, for EZPack Empty Flash Cartridge, 12 g	pk.100
BTFEZPPE-S0025	Top Frit, PE, for EZPack Empty Flash Cartridge, 25 g	pk.100
BTFEZPPE-S0040	Top Frit, PE, for EZPack Empty Flash Cartridge, 40 g	pk.100
BTFEZPPE-S0060	Top Frit, PE, for EZPack Empty Flash Cartridge, 60 g	pk.30
BTFEZPPE-S0080	Top Frit, PE, for EZPack Empty Flash Cartridge, 80 g	pk.30
BTFEZPPE-S0102	Top Frit, PE, for EZPack Empty Flash Cartridge 100 g (Ver. II)	pk.30
BTFEZPPE-S0120	Top Frit, PE, for EZPack Empty Flash Cartridge, 120 g	pk.30
BTFEZPPE-S0220	Top Frit, PE, for EZPack Empty Flash Cartridge, 220 g	pk.30
BTFEZPPE-S0330	Top Frit, PE, for EZPack Empty Flash Cartridge, 330 g	pk.30

Part No.	Description	Qty.
BBFEZPPE-S0004	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 4 g	pk.100
BBFEZPPE-S0012	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 12 g	pk.100
BBFEZPPE-S0025	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 25 g	pk.100
BBFEZPPE-S0040	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 40 g	pk.100
BBFEZPPE-S0060	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 60 g	pk.30
BBFEZPPE-S0080	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 80 g	pk.30
BBFEZPPE-S0100	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 100 g	pk.30
BBFEZPPE-S0120	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 120 g	pk.30
BBFEZPPE-S0220	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 220 g	pk.30
BBFEZPPE-S0330	Bottom Frit, PE, for EZPack Empty Flash Cartridge, 330 g	pk.30


* All frits are made of polyethylene (PE).

O-Rings and Insertion Tools

BGB EZPack O-Rings, Silicone & FEP



Part No.	Description	Qty.
BOREZPSI-S0004	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 4 g	pk.100
BOREZPSI-S0012	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 12 g	pk.100
BOREZPSI-S0025	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 25 g	pk.100
BOREZPSI-S0040	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 40 g	pk.100
BOREZPSI-S0060	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 60 g	pk.30
BOREZPSI-S0080	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 80 g	pk.30
BOREZPSI-S0100	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 100 g	pk.30
BOREZPSI-S0120	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 120 g	pk.30
BOREZPSI-S0220	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 220 g	pk.30
BOREZPSI-S0330	O-Ring, Silicone, for EZPack Empty Flash Cartridge, 330 g	pk.30

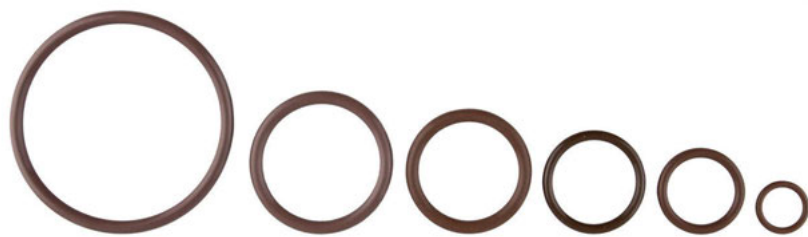

Part No.	Description	Qty.
BOREZPFEP-S0004	O-Ring, FEP, for EZPack Empty Flash Cartridge, 4 g	pk.50
BOREZPFEP-S0012	O-Ring, FEP, for EZPack Empty Flash Cartridge, 12 g	pk.50
BOREZPFEP-S0025	O-Ring, FEP, for EZPack Empty Flash Cartridge, 25 g	pk.50
BOREZPFEP-S0040	O-Ring, FEP, for EZPack Empty Flash Cartridge, 40 g	pk.50
BOREZPFEP-S0060	O-Ring, FEP, for EZPack Empty Flash Cartridge, 60 g	pk.20
BOREZPFEP-S0080	O-Ring, FEP, for EZPack Empty Flash Cartridge, 80 g	pk.20
BOREZPFEP-S0100	O-Ring, FEP, for EZPack Empty Flash Cartridge, 100g	pk.10
BOREZPFEP-S0120	O-Ring, FEP, for EZPack Empty Flash Cartridge, 120g	pk.20
BOREZPFEP-S0220	O-Ring, FEP, for EZPack Empty Flash Cartridge, 220g	pk.10
BOREZPFEP-S0330	O-Ring, FEP, for EZPack Empty Flash Cartridge, 330g	pk.10

Frit Insertion Tools



Part No.	Description	Qty.
BDL000TO-001	Frit Insertion Tool for type S0004	ea.
BDL000TO-002	Frit Insertion Tool for type S0012, S0025 and S0040	ea.
BDL000TO-003	Frit Insertion Tool for type S0060, S0080 and S0120	ea.
BDL000TO-004	Frit Insertion Tool for type S0100, S0220 and S0330	ea.

BGB EZPackXL empty Flash Cartridges

BGB EZPackXL empty flash cartridges offer an innovative column design convenient for manual assembly and to better meet the needs of chemists for large size solid loading samples. Several adaptors for different tubings with various outer diameters (1/4", 3/16" and 1/8") are available to connect the cartridges to the most common flash chromatography systems used on the market. The reusable part of BGB large size empty cartridges is mainly composed of the stainless-steel connection cap which can be used for a long time. The disposable parts mainly include the polypropylene column body, the frits and the sealing gaskets.

Features

- Innovative column design for convenient manual assembly
- Available in 5 sizes of 800g, 1.6Kg, 3.0Kg, 5.0Kg and 7.0Kg
- Reinforced polypropylene cartridge body with a max pressure of 6.9 bar (100 psi)
- Various adaptors available for different OD tubings
- Compatible with any flash system



Hardware Parameters

Hardware	Inner Diameter	Bed Length	Frit*
SK08	127 mm	140 mm	20–25 µm
SK16	127 mm	250 mm	20–25 µm
SK30	127 mm	440 mm	20–25 µm
SK50	127 mm	692 mm	20–25 µm
SK70	127 mm	1000 mm	20–25 µm

* All frits are made of polyethylene (PE).

BGB EZPackXL empty flash cartridge version III is composed of 1 polypropylene plastic tube, 2 stainless steel caps, 8 stainless steel butterfly screws, 2 stainless steel retaining rings, 2 polyethylene frits and 2 O-Rings.



Part No.	Description	Qty.
BDL000F-SK081B	EZPackXL Empty Flash Cartridge (Ver. III), Closed Top, complete, 800 g	ea.
BDL000F-SK161B	EZPackXL Empty Flash Cartridge (Ver. III), Closed Top, complete, 1.6 kg	ea.
BDL000F-SK301B	EZPackXL Empty Flash Cartridge (Ver. III), Closed Top, complete, 3.0 kg	ea.
BDL000F-SK501B	EZPackXL Empty Flash Cartridge (Ver. III), Closed Top, complete, 5.0 kg	ea.
BDL000F-SK701B	EZPackXL Empty Flash Cartridge (Ver. III), Closed Top, complete, 7.0 kg	ea.

BGB EZPackXL Polypropylene Column Bodies

Part No.	Description	Qty.
BEMPT-SK081B	Column Body, PP, for EZPackXL Empty Flash Cartridge (Ver. III), 800 g	ea.
BEMPT-SK161B	Column Body, PP, for EZPackXL Empty Flash Cartridge (Ver. III), 1.6 kg	ea.
BEMPT-SK301B	Column Body, PP, for EZPackXL Empty Flash Cartridge (Ver. III), 3.0 kg	ea.
BEMPT-SK501B	Column Body, PP, for EZPackXL Empty Flash Cartridge (Ver. III), 5.0 kg	ea.
BEMPT-SK701B	Column Body, PP, for EZPackXL Empty Flash Cartridge (Ver. III), 7.0 kg	ea.

Other accessories

Part No.	Description	Qty.
BUFEZPPE-SK0871	Universal Frit, PE, for EZPackXL Empty Flash Cartridge (Ver. III)	ea.
BOREZSI-SK0871	O-Ring, Silicone, for EZPackXL Empty Flash Cartridge (Ver. III)	ea.
BCNXK-SK0871	Connection Kit, for EZPackXL Empty Flash Cartridge (Ver. III)	ea.
BDL000TO-007	Insertion Tool for BGB EZPackXL empty Flash Cartridge (Ver. III) type SK08, SK16, SK30, SK50 & SK70	ea.
BADPTPK18	Adapter, PEEK, for 1/8" OD Tube, for EZPackXL Empty Flash Cartridge (Ver. III)	pk.2
BADPTPK316	Adapter, PEEK, for 3/16" OD Tube, for EZPackXL Empty Flash Cartridge (Ver. III)	pk.2
BADPTPK14	Adapter, PEEK, for 1/4" OD Tube, for EZPackXL Empty Flash Cartridge (Ver. III)	pk.2

Trademarks of Other Manufacturers

The trademarks listed below and referred to herein are the property of the corresponding listed entities.

Advanced Green 3	Chromatography Research Supplies	Nano Filter Vial	Scientific Plastic Products, Inc.
Agilent	Agilent Technologies, Inc.	Nylon 66	E.I. du Pont de Nemours and Company
Alltech	Alltech Associates, Inc.	PAL	CTC Analytics AG
Antec	Antec Leyden B.V.	PEEK	Victrex plc
CTC Analytics	CTC Analytics AG	PerfectPeak	Mott Corporation
Delrin	E.I. du Pont de Nemours and Company	PerkinElmer	PerkinElmer, Inc.
DIN	Deutsches Institut für Normung e.V.	Polymicro	Molex, LLC, USA
DIONEX	Dionex Co.	PTFE	E.I. du Pont de Nemours and Company
DuPont	E.I. du Pont de Nemours and Company	Pyrex	Dow Corning
EPA	European Patent Organisation	Septa BTO	Chromatography Research Supplies
FocusLiner	SGE, Incorporated	SGE	SGE, Inc.
GRACE	W.R. Grace & Co.-Conn.	Shimadzu	Shimadzu Co.
Hamilton	Hamilton Co.	SINGLE StEP	Scientific Plastic Products, Inc.
L-Mark	LMK Properties Limited	Spark Holland	Spark Holland B.V.
Marathon	Chromatography Research Supplies	Swagelok	Swagelok Co.
MEGA FV	Scientific Plastic Products, Inc.	Teflon	The Chemours Company FC
Merlin MicroSeal	Merlin Instrument Company	Thermo Scientific	Thermo Fischer Scientific, Inc.
MICROLITER	Hamilton Co.	Vespel	E.I. du Pont de Nemours and Company
Mininert	Valco Instruments Co.	Viton	The Chemours Company FC
NALGENE	Nalge Nunc International Co.		

This trademark list has been compiled using available published information as of the publication date of this brochure and may not accurately reflect current trademark ownership. All other trademarks appearing in BGB® literature or on its website are the property of their respective owners. For more trademarks visit www.bgb-info.com/trademarks.

Acronyms

AS	Autosampler	GC	Gas Chromatography	PI	Polyimide
BTO	Bleed and Temperature Optimized	GF	Glass Fiber	POM	Polyoxymethylene, Polyacetal
CA	Cellulose Acetate	HPLC	High Pressure Liquid Chromatography	PP	Polypropylene
CE	Capillary Electrophoresis	IC	Ion Chromatography	PPS	Polyphenylene sulfide
CME	Cellulose Mixed Esters	ID	Inner Diameter	PTFE	Polytetrafluoroethylene
CO ₂	Carbon Dioxide	LC	Liquid Chromatography	PTV	Programmed Temperature Vaporizer
CTFE	Chlorotrifluoroethylene	LT	Luer Tip	PVDF	Polyvinylidene difluoride
DIN	Deutsche Industry Norm	MS	Mass Spectrometry	RC	Regenerated Cellulose
EPA	Environmental Protection Agency	OD	Outer Diameter	RN	Removable Needle
EPDM	Ethylene Propylene Diene Monomer	PA	Polyamide	Silicone	Polysiloxane
ETFE	Ethyltrifluoroethylene	PE	Polyethylene	SS	Stainless Steel
FEP	Fluorinated Ethylenepropylene	PE-HD	Polyethylene high density	TPX	Polymethylpentene
FFKM	Perfluorinated Rubber	PEEK	Polyetheretherketone	UGS	Universal Guard System
FN	Fixed Needle	PES	Polyethersulfone		
FS	Fused Silica	PFA	Perfluoroalkoxy		

Part Number Index

11B.....	28	080801.....	36	120300.....	41	202021.....	79
11BI.....	32	080801-W.....	36	120301.....	41	202031.....	79
11BW.....	28	090300.....	38	120302.....	41	211540-3.....	68
11BWS.....	28	090300-B.....	38	120313.....	41	211540-10.....	68
11K.....	28	090300-BN.....	38	130400.....	40	211540-25.....	68
11KI.....	32	090300-G.....	38	130400-W.....	40	211541-3.....	68
11K-ML.....	32	090300-GN.....	38	130401.....	40	211541-10.....	68
11KS.....	28	090300-N.....	38	130401-W.....	40	211541-25.....	68
11KW.....	28	090300-R.....	38	130800.....	41	211590.....	67
11SR.....	32	090300-RN.....	38	130800-W.....	41	211591.....	67
11SRBW.....	32	090300-T.....	38	130801.....	41	211600-3.....	66
11SRBWS.....	32	090300-TN.....	38	130801-W.....	41	211600-5.....	66
11SRS.....	32	090300-Y.....	38	150614.....	31, 35	211600-10.....	66
11SRW.....	32	090300-YN.....	38	150714.....	40	211600-25.....	66
2020LD.....	11	090301.....	38	150715.....	40	211602-3.....	66
2025LD.....	11	090301-B.....	38	151142.....	27	211602-5.....	66
2032LD.....	11	090301-BG.....	39	180300.....	43	211602-10.....	66
2053LD.....	11	090301-BO.....	39	180301.....	43	211602-25.....	66
2525LD.....	11	090301-G.....	38	180305.....	43	211603-3.....	66
2532LD.....	11	090301-R.....	38	180306.....	43	211603-5.....	66
2553LD.....	11	090301-T.....	38	180307.....	43	211603-10.....	66
3232LD.....	11	090301-Y.....	38	180308.....	43	211603-25.....	66
3253LD.....	11	090302.....	39	180315.....	43	211604-3.....	66
5353LD.....	11	090302-B.....	39	180410.....	42	211604-5.....	66
33333-A.....	25	090302-G.....	39	180410-B.....	42	211604-10.....	66
070300.....	36	090302-R.....	39	180420.....	42	211604-25.....	66
070300-SR.....	36	090302-T.....	39	180420-B.....	42	211605-3.....	66
070301.....	36	090302-Y.....	39	200406.....	42	211605-5.....	66
070302.....	36	090304.....	39	200410-CTC.....	42	211605-10.....	66
070313.....	36	090304-B.....	39	200410-CTC-B.....	42	211605-25.....	66
080200.....	36	090304-G.....	39	200410-FF.....	42	211606-3.....	66
080200-SR.....	36	090304-R.....	39	200420.....	42	211606-5.....	66
080201.....	36	090304-T.....	39	200420-B.....	42	211606-10.....	66
080201-R.....	36	090304-Y.....	39	200420-CTC.....	42	211606-25.....	66
080202.....	36	090313.....	39	200420-CTC-B.....	42	211607-3.....	66
080204.....	36	090313-B.....	39	200420-CTC-SPME.....	42	211607-5.....	66
080213.....	36	090313-G.....	39	200420-FF.....	42	211607-10.....	66
080301.....	27	090313-R.....	39	200421.....	42	211607-25.....	66
080302.....	27	090313-T.....	39	200910.....	74	211608-3.....	66
080304.....	27	090313-Y.....	39	200910-HP.....	75	211608-5.....	66
080310.....	27	110400.....	28	200952.....	75	211608-10.....	66
080310-N.....	27	110411.....	29	200953.....	75	211608-25.....	66
080313.....	27	110420.....	28	200954.....	75	211609-3.....	66
080400.....	35	110421.....	28	200955.....	75	211609-5.....	66
080400-S.....	35	110500.....	31, 35	200972.....	79	211609-10.....	66
080400-W.....	35	110501.....	31, 35	200973.....	79	211609-25.....	66
080400-XL.....	37	110502.....	31, 34, 38	200980.....	77	211610-3.....	66
080400-XLS.....	37	110503.....	31, 34, 38	200981.....	77	211610-5.....	66
080400-XLW.....	37	110503-S.....	31, 34, 38	200982.....	77	211610-10.....	66
080401.....	35	110504.....	31, 35	200984.....	77	211610-25.....	66
080401-W.....	35	110505.....	31, 35	200985.....	77	211630-3.....	65
080401-WVS.....	35	110506.....	31, 34, 38	200986.....	77	211631-3.....	65
080401-XL.....	37	110507.....	31, 34, 38	201950.....	77	211632-3.....	65
080401-XLW.....	37	110507-S.....	31, 34, 38	201951.....	77	211633-3.....	65
080401-XLWS.....	37	110508.....	31, 35	201970.....	77	211634-3.....	65
080410.....	35	120200.....	41	201980.....	77	211635-3.....	65
080420.....	37	120201.....	41	201981.....	77	211636-3.....	65
080421.....	37	120202.....	41	202001.....	79	211637-3.....	65
080800.....	36	120204.....	41	202002.....	79	211638-3.....	65
080800-W.....	36	120213.....	41	202010.....	77	211684-1.....	67

Part Number Index

211690.....	65	211925-5	68	220356.....	75	297043.....	31, 50
211691.....	65	211925-10	68	220357.....	75	297044.....	31, 50
211692.....	65	211925-25	68	220358.....	75	297045.....	31, 50
211693.....	65	211926-3	68	220359.....	75	297046.....	31, 50
211694.....	65	211926-5	68	220364.....	75	297047.....	31, 50
211695.....	65	211926-10	68	220365.....	75	297048.....	31, 50
211696.....	65	211926-25	68	220366.....	74	297060.....	51
211697.....	65	211998-CO2	81	220367.....	74	0800030.....	27
211698.....	65	211998-H.....	81	220368.....	74	0800035.....	27
211700-3	69	211998-L.....	89	220369.....	74	08040005.....	27
211700-10	69	211999.....	89	220370.....	74	08040006.....	27
211701-3	69	220300.....	76	220371.....	74	08040007.....	27
211701-10	69	220302.....	78	220373.....	76	08040009.....	27
211702-3	69	220303.....	78	220379.....	77	08040105.....	27
211702-10	69	220304.....	78	220380.....	77	08040106.....	27
211703-3	69	220305.....	78	220381.....	77	08040107.....	27
211703-10	69	220306.....	78	220382.....	77	11030101.....	30
211710-3	69	220307.....	78	220384.....	77	11030101-B	30
211710-10	69	220308.....	78	220386.....	77	11030101-G.....	30
211711-3	69	220312.....	76	220387.....	67	11030101-M.....	30
211711-10	69	220313.....	78	220388.....	67	11030101-R	30
211712-3	69	220314.....	78	220389.....	69	11030101-Y	30
211712-10	69	220315.....	78	220390.....	69	11030201.....	30
211713-3	69	220316.....	78	220525.....	67, 74	11030201-M.....	30
211713-10	69	220317.....	76	220545.....	67, 74	11030401.....	30
211714-3	69	220320.....	78	220565.....	67, 74	11031201.....	29
211714-10	69	220321.....	78	220574.....	67, 74	11031201-B	29
211715-3	69	220322.....	78	295000.....	30, 49	11031201-BN.....	29
211715-10	69	220323.....	78	295001.....	30, 49	11031201-G.....	29
211720-3	69	220324.....	78	295002.....	30, 49	11031201-R	29
211720-10	69	220325.....	78	295003.....	30, 49	11031201-S.....	29
211721-3	69	220326.....	78	295004.....	30, 49	11031201-Y	29
211721-10	69	220327.....	78	295005.....	30, 49	11031201-YN.....	29
211722-3	69	220328.....	78	295006.....	30, 49	11031301-X	30
211722-10	69	220329.....	78	295007.....	30, 49	17162076.....	58
211723-3	69	220330.....	79	295008.....	30, 49	17162077.....	58
211723-10	69	220331.....	79	295020.....	49	17162078.....	58
211724-3	69	220332.....	79	295021.....	49	17162079.....	58
211724-10	69	220333.....	79	295022.....	49	17162080.....	58
211730-3	70	220334.....	79	295023.....	49	17162081.....	58
211730-10	70	220335.....	79	295024.....	49	17162082.....	58
211731-3	70	220336.....	79	295025.....	49	17162083.....	58
211731-10	70	220337.....	78	295026.....	49	20030000.....	43
211732-3	70	220338.....	79	295027.....	49	20030004.....	43
211732-10	70	220339.....	79	295028.....	49	20030004-SPME.....	43
211733-3	70	220340.....	79	295029.....	49	20030100.....	43
211733-10	70	220341.....	79	295061.....	51	20030104.....	43
211734-3	70	220343.....	79	295062.....	51	20030104-BIR.....	43
211734-10	70	220344.....	76	295063.....	51	20030104-SPME.....	43
211735-3	70	220345.....	76	295064.....	51	20030300.....	43
211735-10	70	220346.....	76	295065.....	51	20030304.....	43
211740-3	70	220347.....	76	295066.....	51	20030304-SPME.....	43
211740-10	70	220348.....	76	295067.....	51	20030500.....	43
211750-1	70	220349.....	76	295068.....	51	20030504.....	43
211760.....	70	220350.....	76	295069.....	51	20030504-BIR.....	43
211761.....	70	220351.....	76	295070.....	51	20030504-SPME.....	43
211906-3	68	220352.....	76	295080.....	50	20030700.....	43
211906-10	68	220353.....	76	297040.....	31, 50	20030704.....	43
211906-25	68	220354.....	76	297041.....	31, 50	20031504-SPME.....	43
211925-3	68	220355.....	75	297042.....	31, 50	25160346.....	57

Part Number Index

25160347.....	57	BAC5JCO-2530	108	BDL000F-S0120.....	120	BSABDF-W330.....	118
25160348.....	57	BAC5JCO-2550	108	BDL000F-S0220.....	120	BSANDF-S0800.....	118
25160349.....	57	BAC5KB-K1	108	BDL000F-S0330.....	120	BSANDF-S1600.....	118
25160350.....	57	BAC5KB-K4	108	BDL000F-SK081B.....	123	BSANDF-S3000.....	118
25160351.....	57	BAC5KCO-1505	108	BDL000F-SK161B.....	123	BSANDF-W004.....	118
26060425.....	9	BAC5KCO-1520	108	BDL000F-SK301B.....	123	BSANDF-W012.....	118
26060427.....	9	BAC5KCO-1530	108	BDL000F-SK501B.....	123	BSANDF-W025.....	118
29013417.....	19, 21	BAC5KCO-1550	108	BDL000F-SK701B.....	123	BSANDF-W040.....	118
29013486.....	19, 20	BAC5KCO-2505	108	BDL000TO-001.....	121	BSANDF-W080.....	118
29013487.....	19, 20	BAC5KCO-2520	108	BDL000TO-002.....	121	BSANDF-W120.....	118
29013488.....	19, 20	BAC5KCO-2530	108	BDL000TO-003.....	121	BSANDF-W220.....	118
29013489.....	20	BAC5KCO-2550	108	BDL000TO-004.....	121	BSANDF-W330.....	118
29033406.....	19, 21	BAC5KF-S0800.....	107	BDL000TO-007.....	123	BSC1CF-S0800.....	105
29033460.....	22	BAC5KF-S1600.....	107	BEMPT-SK081B.....	123	BSC1CF-S1600.....	105
29033461.....	22	BAC5KF-S3000.....	107	BEMPT-SK161B.....	123	BSC1CF-S3000.....	105
29033471.....	22	BAC5KF-W004.....	107	BEMPT-SK301B.....	123	BSC1CF-W004.....	105
30162086.....	57	BAC5KF-W012.....	107	BEMPT-SK501B.....	123	BSC1CF-W012.....	105
30162087.....	57	BAC5KF-W025.....	107	BEMPT-SK701B.....	123	BSC1CF-W025.....	105
30162088.....	57	BAC5KF-W040.....	107	BOREZPFEP-S0004.....	121	BSC1CF-W040.....	105
30162089.....	57	BAC5KF-W080.....	107	BOREZPFEP-S0012.....	121	BSC1CF-W080.....	105
30162090.....	57	BAC5KF-W120.....	107	BOREZPFEP-S0025.....	121	BSC1CF-W120.....	105
30162091.....	57	BAC5KF-W220.....	107	BOREZPFEP-S0040.....	121	BSC1CF-W220.....	105
30162092.....	57	BAC5KF-W330.....	107	BOREZPFEP-S0060.....	121	BSC1CF-W330.....	105
30162093.....	57	BADPTPK14.....	123	BOREZPFEP-S0080.....	121	BSCNAF-W004.....	115
30162094.....	57	BADPTPK18.....	123	BOREZPFEP-S0100.....	121	BSCNAF-W012.....	115
BAC5AB-K1.....	108	BADPTPK316.....	123	BOREZPFEP-S0120.....	121	BSCNAF-W025.....	115
BAC5AB-K4.....	108	BAHAAF-W004.....	117	BOREZPFEP-S0220.....	121	BSCNAF-W040.....	115
BAC5ACO-1505.....	108	BAHAAF-W012.....	117	BOREZPFEP-S0330.....	121	BSCNAF-W080.....	115
BAC5ACO-1520.....	108	BAHAAF-W025.....	117	BOREZPSI-S0004.....	121	BSCNAF-W120.....	115
BAC5ACO-1530.....	108	BAHAAF-W040.....	117	BOREZPSI-S0012.....	121	BSCNAF-W220.....	115
BAC5ACO-1550.....	108	BAHAAF-W080.....	117	BOREZPSI-S0025.....	121	BSCNAF-W330.....	115
BAC5ACO-2505.....	108	BAHAAF-W120.....	117	BOREZPSI-S0040.....	121	BSE1AB-K1.....	106
BAC5ACO-2520.....	108	BAHAAF-W220.....	117	BOREZPSI-S0060.....	121	BSE1AB-K4.....	106
BAC5ACO-2530.....	108	BAHAAF-W330.....	117	BOREZPSI-S0080.....	121	BSE1ACO-1505.....	106
BAC5ACO-2550.....	108	BAHDAF-W004.....	117	BOREZPSI-S0100.....	121	BSE1ACO-1520.....	106
BAC5AF-S0800.....	107	BAHDAF-W012.....	117	BOREZPSI-S0120.....	121	BSE1ACO-1530.....	106
BAC5AF-S1600.....	107	BAHDAF-W025.....	117	BOREZPSI-S0220.....	121	BSE1ACO-1550.....	106
BAC5AF-S3000.....	107	BAHDAF-W040.....	117	BOREZPSI-S0330.....	121	BSE1ACO-2505.....	106
BAC5AF-W004.....	107	BAHDAF-W080.....	117	BOREZSI-SK0871.....	123	BSE1ACO-2520.....	106
BAC5AF-W012.....	107	BAHDAF-W120.....	117	BSAADF-S0800.....	118	BSE1ACO-2530.....	106
BAC5AF-W025.....	107	BAHDAF-W220.....	117	BSAADF-S1600.....	118	BSE1ACO-2550.....	106
BAC5AF-W040.....	107	BAHDAF-W330.....	117	BSAADF-S3000.....	118	BSE1AF-S0800.....	105
BAC5AF-W080.....	107	BBFEZPPE-S0004.....	120	BSAADF-W004.....	118	BSE1AF-S1600.....	105
BAC5AF-W120.....	107	BBFEZPPE-S0012.....	120	BSAADF-W012.....	118	BSE1AF-S3000.....	105
BAC5AF-W220.....	107	BBFEZPPE-S0025.....	120	BSAADF-W025.....	118	BSE1AF-W004.....	105
BAC5AF-W330.....	107	BBFEZPPE-S0040.....	120	BSAADF-W040.....	118	BSE1AF-W012.....	105
BAC5IB-K1.....	108	BBFEZPPE-S0060.....	120	BSAADF-W080.....	118	BSE1AF-W025.....	105
BAC5IB-K4.....	108	BBFEZPPE-S0080.....	120	BSAADF-W120.....	118	BSE1AF-W040.....	105
BAC5ICO-1505.....	108	BBFEZPPE-S0100.....	120	BSAADF-W220.....	118	BSE1AF-W080.....	105
BAC5ICO-1520.....	108	BBFEZPPE-S0120.....	120	BSAADF-W330.....	118	BSE1AF-W120.....	105
BAC5ICO-2505.....	108	BBFEZPPE-S0220.....	120	BSABDF-S0800.....	118	BSE1AF-W220.....	105
BAC5ICO-2520.....	108	BBFEZPPE-S0330.....	120	BSABDF-S1600.....	118	BSE1AF-W330.....	105
BAC5JB-K1.....	108	BCNXK-SK0871.....	123	BSABDF-S3000.....	118	BSE1IB-K1.....	106
BAC5JB-K4.....	108	BDL000F-S0004.....	120	BSABDF-W004.....	118	BSE1IB-K4.....	106
BAC5JCO-1505.....	108	BDL000F-S0012.....	120	BSABDF-W012.....	118	BSE1ICO-1505.....	106
BAC5JCO-1520.....	108	BDL000F-S0025.....	120	BSABDF-W025.....	118	BSE1ICO-1520.....	106
BAC5JCO-1530.....	108	BDL000F-S0040.....	120	BSABDF-W040.....	118	BSE1ICO-2505.....	106
BAC5JCO-1550.....	108	BDL000F-S0060.....	120	BSABDF-W080.....	118	BSE1ICO-2520.....	106
BAC5JCO-2505.....	108	BDL000F-S0080.....	120	BSABDF-W120.....	118	BSE1JB-K1.....	106
BAC5JCO-2520.....	108	BDL000F-S0102.....	120	BSABDF-W220.....	118	BSE1JB-K4.....	106

Part Number Index

BSE1JCO-1505.....	106	BTFEZPPE-S0040	120	BTW1AB-K4.....	114	BTW6ACO-2550.....	110
BSE1JCO-1520.....	106	BTFEZPPE-S0060	120	BTW1ACO-1505.....	114	BTW6AF-W004.....	109
BSE1JCO-1530.....	106	BTFEZPPE-S0080	120	BTW1ACO-1520.....	114	BTW6AF-W012.....	109
BSE1JCO-1550.....	106	BTFEZPPE-S0102	120	BTW1ACO-1530.....	114	BTW6AF-W025.....	109
BSE1JCO-2505.....	106	BTFEZPPE-S0120	120	BTW1ACO-1550.....	114	BTW6AF-W040.....	109
BSE1JCO-2520.....	106	BTFEZPPE-S0220	120	BTW1ACO-2505.....	114	BTW6AF-W080.....	109
BSE1JCO-2530.....	106	BTFEZPPE-S0330	120	BTW1ACO-2520.....	114	BTW6AF-W120.....	109
BSE1JCO-2550.....	106	BTW0AB-K1.....	112	BTW1ACO-2530.....	114	BTW6AF-W220.....	109
BSE1KB-K1	106	BTW0AB-K4.....	112	BTW1ACO-2550.....	114	BTW6AF-W330.....	109
BSE1KB-K4	106	BTW0ACO-1505.....	112	BTW1AF-W004.....	113	BTW6IB-K1	110
BSE1KCO-1505.....	106	BTW0ACO-1520.....	112	BTW1AF-W012.....	113	BTW6IB-K4	110
BSE1KCO-1520.....	106	BTW0ACO-1530.....	112	BTW1AF-W025.....	113	BTW6ICO-1505	110
BSE1KCO-1530.....	106	BTW0ACO-1550.....	112	BTW1AF-W040.....	113	BTW6ICO-1520	110
BSE1KCO-1550.....	106	BTW0ACO-2505.....	112	BTW1AF-W080.....	113	BTW6ICO-2505	110
BSE1KCO-2505.....	106	BTW0ACO-2520.....	112	BTW1AF-W120.....	113	BTW6ICO-2520	110
BSE1KCO-2520.....	106	BTW0ACO-2530.....	112	BTW1AF-W220.....	113	BTW6JB-K1.....	110
BSE1KCO-2530.....	106	BTW0ACO-2550.....	112	BTW1AF-W330.....	113	BTW6JB-K4.....	110
BSE1KCO-2550.....	106	BTW0AF-W004.....	111	BTW1IB-K1.....	114	BTW6JCO-1505.....	110
BSLK.....	116	BTW0AF-W012.....	111	BTW1IB-K4.....	114	BTW6JCO-1520.....	110
BSNHAF-W004	116	BTW0AF-W025.....	111	BTW1ICO-1505	114	BTW6JCO-1530.....	110
BSNHAF-W012	116	BTW0AF-W040.....	111	BTW1ICO-1520	114	BTW6JCO-1550.....	110
BSNHAF-W025	116	BTW0AF-W080.....	111	BTW1ICO-2505	114	BTW6JCO-2505.....	110
BSNHAF-W040	116	BTW0AF-W120.....	111	BTW1ICO-2520	114	BTW6JCO-2520.....	110
BSNHAF-W080	116	BTW0AF-W220.....	111	BTW1JB-K1.....	114	BTW6JCO-2530.....	110
BSNHAF-W120	116	BTW0AF-W330.....	111	BTW1JB-K4.....	114	BTW6JCO-2550.....	110
BSNHAF-W220	116	BTW0IB-K1	112	BTW1JCO-1505.....	114	BTW6KB-K1.....	110
BSNHAF-W330	116	BTW0IB-K4	112	BTW1JCO-1520.....	114	BTW6KB-K4.....	110
BSOHAF-W004	115	BTW0ICO-1505	112	BTW1JCO-1530.....	114	BTW6KCO-1505.....	110
BSOHAF-W012	115	BTW0ICO-1520	112	BTW1JCO-1550.....	114	BTW6KCO-1520.....	110
BSOHAF-W025	115	BTW0ICO-2505	112	BTW1JCO-2505.....	114	BTW6KCO-1530.....	110
BSOHAF-W040	115	BTW0ICO-2520	112	BTW1JCO-2520.....	114	BTW6KCO-1550.....	110
BSOHAF-W080	115	BTW0JB-K1	112	BTW1JCO-2530.....	114	BTW6KCO-2505.....	110
BSOHAF-W120	115	BTW0JB-K4.....	112	BTW1JCO-2550.....	114	BTW6KCO-2520.....	110
BSOHAF-W220	115	BTW0JCO-1505.....	112	BTW1KB-K1.....	114	BTW6KCO-2530.....	110
BSOHAF-W330	115	BTW0JCO-1520.....	112	BTW1KB-K4.....	114	BTW6KCO-2550.....	110
BSS2AF-S0800.....	104	BTW0JCO-1530.....	112	BTW1KCO-1505.....	114	BTW6KF-W004.....	109
BSS2AF-S1600.....	104	BTW0JCO-1550.....	112	BTW1KCO-1520.....	114	BTW6KF-W012.....	109
BSS2AF-S3000.....	104	BTW0JCO-2505.....	112	BTW1KCO-1530.....	114	BTW6KF-W025.....	109
BSS2AF-W004	104	BTW0JCO-2520.....	112	BTW1KCO-1550.....	114	BTW6KF-W040.....	109
BSS2AF-W012	104	BTW0JCO-2530.....	112	BTW1KCO-2505.....	114	BTW6KF-W080.....	109
BSS2AF-W025	104	BTW0JCO-2550.....	112	BTW1KCO-2520.....	114	BTW6KF-W120.....	109
BSS2AF-W040	104	BTW0KB-K1.....	112	BTW1KCO-2530.....	114	BTW6KF-W220.....	109
BSS2AF-W080	104	BTW0KB-K4.....	112	BTW1KCO-2550.....	114	BTW6KF-W330.....	109
BSS2AF-W120	104	BTW0KCO-1505.....	112	BTW1KF-W004.....	113	BUFEZPPE-SK0871	123
BSS2AF-W220	104	BTW0KCO-1520.....	112	BTW1KF-W012.....	113	BVFFS1LPK.....	64
BSS2AF-W330	104	BTW0KCO-1530.....	112	BTW1KF-W025.....	113	BVFFS1LSS	64
BSS2CF-S0800.....	104	BTW0KCO-1550.....	112	BTW1KF-W040.....	113	BVFFS2LPK.....	64
BSS2CF-S1600.....	104	BTW0KCO-2505.....	112	BTW1KF-W080.....	113	BVFFS2LSS	64
BSS2CF-S3000.....	104	BTW0KCO-2520.....	112	BTW1KF-W120.....	113	BVFFSINLPK.....	64
BSS2CF-W004	104	BTW0KCO-2530.....	112	BTW1KF-W220.....	113	BVFFSINLSS.....	64
BSS2CF-W012	104	BTW0KCO-2550.....	112	BTW1KF-W330.....	113	CS	7, 8
BSS2CF-W025	104	BTW0KF-W004.....	111	BTW6AB-K1.....	110	EPA20.....	44
BSS2CF-W040	104	BTW0KF-W012.....	111	BTW6AB-K4.....	110	EPA20-B.....	44
BSS2CF-W080	104	BTW0KF-W025.....	111	BTW6ACO-1505.....	110	EPA30.....	45
BSS2CF-W120	104	BTW0KF-W040.....	111	BTW6ACO-1520.....	110	EPA30A	45
BSS2CF-W220	104	BTW0KF-W080.....	111	BTW6ACO-1530.....	110	EPA30A-B.....	45
BSS2CF-W330	104	BTW0KF-W120.....	111	BTW6ACO-1550.....	110	EPA30-B.....	45
BTFEZPPE-S0004	120	BTW0KF-W220.....	111	BTW6ACO-2505.....	110	EPA40	45
BTFEZPPE-S0012	120	BTW0KF-W330.....	111	BTW6ACO-2520.....	110	EPA40A	45
BTFEZPPE-S0025	120	BTW1AB-K1.....	114	BTW6ACO-2530.....	110	EPA40A-B.....	45

Part Number Index

EPA40-B.....	45	GSSH03.....	21	LS1102.....	14	LS3101.....	17
EPA60.....	45	GV1212.....	22	LS1102-5.....	14	LS3101-5.....	17
EPA60A.....	45	GV1400.....	22	LS1103.....	14	LS3102.....	17
EPA60A-B.....	45	GV1405.....	22	LS1103-5.....	14	LS3102-5.....	17
EPA60-B.....	45	GV1408.....	22	LS1104.....	14	LS3103.....	17
FV01-1.....	54	GV1414.....	22	LS1104-5.....	14	LS3103-5.....	17
FV01-2.....	54	GV1416.....	22	LS1105.....	14	LS3104.....	17
FV03-1.....	53	GV1418.....	22	LS1105-5.....	14	LS3104-5.....	17
FV03-2.....	53	GV1460.....	22	LS1106.....	14	LS3105.....	17
FV04-1.....	54	GV1600.....	22	LS1106-5.....	14	LS3105-5.....	17
FV04-2.....	54	GV1600-HP.....	22	LS1107.....	14	LS3200.....	16
FV05-1.....	54	GV1602.....	22	LS1107-5.....	14	LS3200-5.....	16
FV05-2.....	54	GV1603.....	22	LS1108.....	14	LS3201.....	16
FV07-1.....	53	GV1603-HP.....	22	LS1108-5.....	14	LS3201-5.....	16
FV07-2.....	53	GV1604.....	22	LS1200.....	14	LS3300.....	18
G1212.....	20	GV1604-HP.....	22	LS1200-5.....	14	LS3300-5.....	18
G1400.....	20	GV1605.....	22	LS1201.....	14	LS3301.....	18
G1405.....	20	GV1605-HP.....	22	LS1201-5.....	14	LS3301-5.....	18
G1408.....	20	GV1608.....	22	LS1202.....	14	LS3302.....	18
G1414.....	20	GV1608-HP.....	22	LS1202-5.....	14	LS3302-5.....	18
G1416.....	20	GV1609.....	22	LS2000.....	19	LS3303.....	18
G1418.....	20	GV1610.....	22	LS2000-5.....	19	LS3303-5.....	18
G1418-HP.....	20	GV1616.....	22	LS2001.....	19	LS3304.....	18
G1440.....	20	GV1623.....	22	LS2001-5.....	19	LS3304-5.....	18
G1460.....	20	GV1624.....	22	LS2002.....	19	LS3400.....	18
G1460-S.....	20	GV1625.....	22	LS2002-5.....	19	LS3400-5.....	18
G1600.....	20	GV1633.....	22	LS2003.....	19	LS3401.....	18
G1604.....	20	GV1634.....	22	LS2003-5.....	19	LS3401-5.....	18
G1604-HP.....	20	GV1800.....	22	LS2100.....	19	LS3402.....	18
G1605.....	20	GV1804.....	22	LS2100-5.....	19	LS3402-5.....	18
G1605-HP.....	20	GV1805.....	22	LS2101.....	19	LS3403.....	18
G1608.....	20	GV1808.....	22	LS2101-5.....	19	LS3403-5.....	18
G1608-HP.....	20	GV1816.....	22	LS2102.....	19	LS3404.....	18
G1610.....	20	GV1818.....	22	LS2102-5.....	19	LS3404-5.....	18
G1610-HP.....	20	GV1825.....	22	LS2103.....	19	LS3405.....	18
G1612.....	20	GV1828.....	22	LS2103-5.....	19	LS3405-5.....	18
G1612-HP.....	20	GV16234.....	22	LS2200.....	19	LS9000.....	15
G1616.....	20	GV16235.....	22	LS2200-5.....	19	LS9000-5.....	15
G1625.....	20	GV16245.....	22	LS2201.....	19	LS9001.....	15
G1800.....	20	IMBUS.....	13, 73	LS2201-5.....	19	LS9001-5.....	15
G1804.....	20	LS1000.....	15	LS2202.....	19	LS9002.....	15
G1805.....	20	LS1000-5.....	15	LS2202-5.....	19	LS9002-5.....	15
G1805-CE.....	20	LS1001.....	15	LS3000.....	16	LS9003.....	15
G1808.....	20	LS1001-5.....	15	LS3000-5.....	16	LS9003-5.....	15
G1808-CE.....	20	LS1002.....	15	LS3001.....	16	LS9004.....	15
G1812.....	20	LS1002-5.....	15	LS3001-5.....	16	LS9004-5.....	15
G1816.....	20	LS1003.....	15	LS3002.....	16	LS9005.....	19
G1818.....	20	LS1003-5.....	15	LS3002-5.....	16	LS9005-5.....	19
G3434.....	20	LS1004.....	15	LS3003.....	16	LS9006.....	16, 18
G3838.....	20	LS1004-5.....	15	LS3003-5.....	16	LS9006-5.....	16, 18
GS635-HP.....	21	LS1005.....	15	LS3004.....	16	LS9007.....	16, 18
GS652-HP.....	21	LS1005-5.....	15	LS3004-5.....	16	LS9007-5.....	16, 18
GSBV01.....	21	LS1006.....	15	LS3005.....	16	MFCA013022.....	62
GSH04.....	20	LS1006-5.....	15	LS3005-5.....	16	MFCA013045.....	62
GSH05.....	20	LS1007.....	15	LS3006.....	16	MFCA025022.....	62
GSH08.....	20	LS1007-5.....	15	LS3006-5.....	16	MFCA025045.....	62
GSH50.....	20	LS1100.....	14	LS3007.....	16	MFCA047022.....	62
GSPE01.....	21	LS1100-5.....	14	LS3007-5.....	16	MFCA047045.....	62
GSSH01.....	21	LS1101.....	14	LS3100.....	17	MFCA090022.....	62
GSSH02.....	21	LS1101-5.....	14	LS3100-5.....	17	MFCA090045.....	62

Part Number Index

MFCA142022	62	MFPTFE090045L	63	QP-239077	47	SET-3010269	97
MFCA142045	62	MFPTFE142022B	63	QP-262535	47	SET-3010270	97
MFCN013022	62	MFPTFE142045B	63	QP-272626	47	SET-3010299	97
MFCN013045	62	MFPVDF013022	63	QP-272627	47	SET-3010300	97
MFCN025022	62	MFPVDF013022L	63	QP-272628	47	SET-3010317	97
MFCN025045	62	MFPVDF013045	63	QP-272632	47	SET-3010318	97
MFCN047022	62	MFPVDF013045L	63	QP-272633	47	SET-3010319	97
MFCN047045	62	MFPVDF025022	63	QP-272634	47	SET-3030126	94
MFCN090022	62	MFPVDF025022L	63	QP-272635	47	SET-3030127	94
MFCN090045	62	MFPVDF025045	63	QP-328904	47	SET-3030128	94
MFCN142022	62	MFPVDF025045L	63	S202020D	12	SET-3030129	94
MFCN142045	62	MFPVDF047022	63	S252525D	12	SET-3030130	94
MFMCE013022	62	MFPVDF047022L	63	S323232D	12	SET-3030131	94
MFMCE013045	62	MFPVDF047045	63	S535353D	12	SET-3030132	94
MFMCE025022	62	MFPVDF047045L	63	S20202020TD	12	SET-3030133	94
MFMCE025045	62	MFPVDF090022	63	S20202020XD	13	SET-3030134	94
MFMCE047022	62	MFPVDF090045	63	S25252525TD	12	SET-3030135	94
MFMCE047045	62	MFPVDF142022	63	S25252525XD	13	SET-3030136	94
MFMCE050022	62	MFPVDF142045	63	S32323232TD	12	SET-3030137	94
MFMCE050045	62	MRV-1	48	S32323232XD	13	SET-3030138	94
MFMCE090022	62	MRV-3	48	S53535353TD	12	SET-3030139	94
MFMCE090045	62	MRV-5	48	S53535353XD	13	SET-3030140	94
MFMCE142022	62	MRV-10	48	SA5	24	SET-3030141	94
MFMCE142045	62	MRVA-10	48	SA9	24	SET-3030151	94
MFNY013022	63	MRV-CS1	48	SA11	24	SET-3030152	94
MFNY013045	63	MRV-CS2	48	SA11-100	24	SET-3030154	98
MFNY025022	63	MS-FIT	11	SA17	24	SET-3030155	98
MFNY025045	63	MS-FIT3	11	SA95	24	SET-3030156	98
MFNY047022	63	MS-FIT4-T	11	SA115	24	SET-3030163	94
MFNY047045	63	MS-FIT4-X	11	SA127	24	SET-3030164	94
MFNY050022	63	MV-13T	48	SAS	24	SET-3030165	94
MFNY050045	63	MV-15T	48	SB5	24	SET-3030166	94
MFNY090022	63	MV-18T	48	SB9	24	SET-3030167	94
MFNY090045	63	MV-20T	48	SB10	24	SET-3030168	94
MFNY142022	63	MV-24T	48	SB11	24	SET-3030169	94
MFNY142045	63	PPCV1103B	29, 32	SB11-100	24	SET-3030170	94
MFNY293022	63	PPCV1103K	29, 32	SB17	24	SET-3030171	94
MFNY293045	63	PPCV1107K	29, 32	SB64	24	SET-3030174	94
MFPES013022	63	PP-EWS-2L	58	SB95	24	SET-3030175	94
MFPES013045	63	PP-EWS-2LL	58	SB115	24	SET-3030176	94
MFPES025022	63	PP-EWS-5L	58	SB127	24	SET-3030186	98
MFPES025045	63	PP-EWS-5LL	58	SBS	24	SET-3030187	98
MFPES047022	63	PP-EWS-10L	58	SET-3010083	96	SET-3030188	98
MFPES047045	63	PP-EWS-10LL	58	SET-3010084	96	SET-3030205	99
MFPES090022	63	PP-EWS-20L	58	SET-3010085	96	SET-3030206	99
MFPES090045	63	PP-EWS-20LL	58	SET-3010086	96	SET-3030207	99
MFPES142022	63	PPSB12-B	52	SET-3010087	96	SET-3030208	99
MFPES142045	63	PPSB12-G	52	SET-3010088	96	SET-3030209	99
MFPTFE013022B	63	PPSB12-O	52	SET-3010089	96	SET-3030210	99
MFPTFE013022L	63	PPSB12-P	52	SET-3010175	97	SET-3030211	99
MFPTFE013045L	63	PPSB12-T	52	SET-3010176	97	SET-3030241	97
MFPTFE025022B	63	PPSB12-Y	52	SET-3010177	97	SET-3030242	97
MFPTFE025045B	63	PPSB15-R	40, 52	SET-3010179	97	SET-3030243	97
MFPTFE025045L	63	PPSB24-B	52	SET-3010262	97	SET-3030244	97
MFPTFE047022B	63	PPSB28A-V	47, 52	SET-3010263	97	SET-3030245	97
MFPTFE047045B	63	PPSB28B-V	52	SET-3010264	97	SET-3030246	97
MFPTFE047045L	63	PPSV0903K	37	SET-3010265	97	SET-3030247	97
MFPTFE090022B	63	PPSV0907K	37	SET-3010266	97	SET-3030248	98
MFPTFE090022L	63	QP-239071	47	SET-3010267	97	SET-3030249	98
MFPTFE090045B	63	QP-239075	47	SET-3010268	97	SET-3030250	98

Part Number Index

SET-3030251	98	SET-LMK.2620615-6P ..	95	SF2507-1A.....	56	SPFMAXNC02.....	59
SET-3030252	98	SET-LMK.2620706	95	SF2507-1A3.....	56	SPFMAXNC45.....	59
SET-3030298	99	SET-LMK.2620706-2P ..	95	SF2507-2A.....	56	SPFMAXNL02.....	59
SET-3030299	99	SET-LMK.2620706-6P ..	95	SF2507-2A3.....	56	SPFMAXNL45.....	59
SET-3030300	99	SET-LMK.2620719	95	SF2509-1A.....	55	SPFMAXPP02.....	59
SET-3030301	99	SET-LMK.2620719-2P ..	95	SF2509-1A3.....	55	SPFMAXPP45.....	59
SET-3030302	99	SET-LMK.2620719-6P ..	95	SF2509-2A.....	55	SPFMAXPS02.....	59
SET-3030303	99	SET-LMK.2620721	95	SF2509-2A3.....	55	SPFMAXPS45.....	59
SET-3030366	98	SET-LMK.2620721-2P ..	95	SM5-50	24	SPFMAXPT02.....	59
SET-3030368	98	SET-LMK.2620721-6P ..	95	SM9-50	24	SPFMAXPT45.....	59
SET-3030389	99	SET-LMK.2620803	95	SM11-50	24	SPFMAXPV02.....	59
SET-3030544	98	SET-LMK.2620821	95	SM11-100	24	SPFMAXPV45.....	59
SET-3030604	98	SET-LMK.2620903	95	SM17-50	24	SPFMAXRC02.....	59
SET-3030605	98	SET-LMK.2620908	95	SM115-50	24	SPFMAXRC45.....	59
SET-3030606	98	SF2	44	SM127-50	24	SPFMICCA02.....	60
SET-3030607	98	SF2-B	44	SMS-50.....	24	SPFMICCA45.....	60
SET-3030672	98	SF4	44	SP-A2845PTFE	91	SPFMICNC02.....	60
SET-3030673	98	SF4-B	44	SP-A3245PP.....	91	SPFMICNC45.....	60
SET-3030674	98	SF8	44	SP-A3245PTFE	91	SPFMICNL02.....	60
SET-3030676	98	SF8-B	44	SP-A3845PP.....	91	SPFMICNL45.....	60
SET-3050022	98, 99	SF12	44	SP-A3845PTFE	91	SPFMICPP02.....	60
SET-3050036	98, 99	SF12-B	44	SP-A4032PP.....	91	SPFMICPP45.....	60
SET-3050072	98, 99	SF16	44	SP-A4038PP.....	91	SPFMICPS02.....	60
SET-3050179	98, 99	SF20	44	SP-A4045PP.....	91	SPFMICPS45.....	60
SET-LMK.2106302	95	SF1301-1A.....	56	SP-A4045PTFE	91	SPFMICPT02.....	60
SET-LMK.2106303	95	SF1301-2A.....	56	SP-A4532PP.....	91	SPFMICPT45.....	60
SET-LMK.2106403	95	SF1303-1A.....	55	SP-A4538PP.....	91	SPFMICPV02.....	60
SET-LMK.2106416	95	SF1303-2A.....	55	SP-A4545X4	91	SPFMICPV45.....	60
SET-LMK.2106416-2P ..	95	SF1304-1A.....	55	SP-A4555PP.....	91	SPFMICRC02.....	60
SET-LMK.2106416-6P ..	95	SF1304-2A.....	55	SP-A5560PP.....	91	SPFMICRC45.....	60
SET-LMK.2106424	95	SF1305-1A.....	56	SP-A5590PP.....	91	SPFMIDCA02.....	59
SET-LMK.2106426	95	SF1305-2A.....	56	SP-A6090PP.....	91	SPFMIDCA45.....	59
SET-LMK.2116404	96	SF1306-1A.....	55	SP-A454545	91	SPFMIDNC02.....	59
SET-LMK.2116405	96	SF1306-2A.....	55	SP-AC1512	90	SPFMIDNC45.....	59
SET-LMK.2116406	96	SF1307-1A.....	56	SP-AC1612	90	SPFMIDNL02.....	59
SET-LMK.2220001	95	SF1307-2A.....	56	SP-AC1675	90	SPFMIDNL45.....	59
SET-LMK.2220001-6P ..	95	SF1309-1A.....	55	SP-AC4280	90	SPFMIDPP02.....	59
SET-LMK.2606403	95	SF1309-2A.....	55	SP-AC6565	90	SPFMIDPP45.....	59
SET-LMK.2606407	95	SF2500-07A.....	56	SP-AC7012	90	SPFMIDPS02.....	59
SET-LMK.2606416	95	SF2500-10A.....	56	SP-AF90E	89	SPFMIDPS45.....	59
SET-LMK.2616003	96	SF2500-12A.....	56	SP-AFSE	89	SPFMIDPT02.....	59
SET-LMK.2616012	96	SF2500-31A.....	56	SP-AGN45	82	SPFMIDPT45.....	59
SET-LMK.2616404	96	SF2501-1A.....	56	SP-AY3PP	90	SPFMIDPV02.....	59
SET-LMK.2616405	96	SF2501-2A.....	56	SP-AY5PP	90	SPFMIDPV45.....	59
SET-LMK.2616422	96	SF2502-1A3.....	56	SP-AY7PP	90	SPFMIDRC02.....	59
SET-LMK.2616502C	96	SF2502-2A3.....	56	SP-AY9PP	90	SPFMIDRC45.....	59
SET-LMK.2616702C	96	SF2503-1A.....	55	SP-AY11PP.....	90	SPFNANCA02.....	60
SET-LMK.2616703	96	SF2503-1A3.....	55	SP-BFA34PP	90	SPFNANCA45.....	60
SET-LMK.2616704C	96	SF2503-2A.....	55	SP-BFA56PP	90	SPFNANNC02.....	60
SET-LMK.2616803	96	SF2503-2A3.....	55	SP-BFA69PP	90	SPFNANNC45.....	60
SET-LMK.2616804	96	SF2504-1A.....	55	SP-BFA911PP	90	SPFNANNL02.....	60
SET-LMK.2616822	96	SF2504-1A3.....	55	SP-BFS34PP.....	90	SPFNANNL45.....	60
SET-LMK.2616922	96	SF2504-2A.....	55	SP-BFS56PP.....	90	SPFNANPP02.....	60
SET-LMK.2620011	95	SF2504-2A3.....	55	SP-BFS69PP.....	90	SPFNANPP45.....	60
SET-LMK.2620054	95	SF2505-1A.....	56	SP-BFS911PP.....	90	SPFNANPS02.....	60
SET-LMK.2620517	95	SF2505-1A3.....	56	SP-C50PE5.....	84	SPFNANPS45.....	60
SET-LMK.2620517-2P ..	95	SF2505-2A.....	56	SP-FAL	89	SPFNANPT02.....	60
SET-LMK.2620517-6P ..	95	SF2505-2A3.....	56	SP-FAM	89	SPFNANPT45.....	60
SET-LMK.2620615	95	SF2506-1A.....	55	SPFMAXCA02.....	59	SPFNANPV02.....	60
SET-LMK.2620615-2P ..	95	SF2506-2A.....	55	SPFMAXCA45.....	59	SPFNANPV45.....	60

Part Number Index

SPFNANRC02.....	60	SP-S45F6-G.....	81	SP-W55F2.....	85	SRC302-B.....	33
SPFNANRC45.....	60	SP-S45F6-R.....	81	SP-W55F2B1.....	85	SRC302-G.....	33
SP-FSL.....	83, 87, 89	SP-S45F6-V.....	81	SP-W55F2B2.....	85	SRC302-R.....	33
SP-FSM.....	83, 87, 89	SP-S45F6-Y.....	81	SP-W55F2B3.....	85	SRC302-T.....	33
SP-FSS.....	83, 87, 89	SP-S45P141.....	82	SP-W55F3.....	85	SRC302-Y.....	33
SP-FSXL.....	89	SP-S45P3161.....	82	SP-W55F3B1.....	85	SRC313-B.....	33
SP-FSXXL.....	89	SP-S45P3162.....	82	SP-W55F3B2.....	85	SRC313-G.....	33
SP-NBLK16.....	92	SP-S45P3163.....	82	SP-W55F3B3.....	85	SRC313-R.....	33
SP-NBLK18.....	92	SP-S55F1P141.....	82	SP-W55F4.....	85	SRC313-T.....	33
SP-NBLU16.....	92	SP-S55P316.....	82	SP-W60B4.....	86	SS10.....	24
SP-NBLU18.....	92	SP-S55P316P141.....	82	SP-W60F1.....	86	SS11.....	24
SP-NF16.....	92	SP-S60F1P141.....	82	SP-W60F1B1.....	86	SS17.....	24
SP-NF18.....	92	SP-S60P141.....	82	SP-W60F1B2.....	86	SS95.....	24
SP-NF316.....	92	SP-S60P316.....	82	SP-W60F1B3.....	86	SS125.....	24
SP-NGRE16.....	92	SP-S60P316P141.....	82	SP-W60F2.....	86	SSS.....	24
SP-NGRE18.....	92	SP-SAIV.....	81	SP-W60F2B1.....	86	SUNI3AD.....	12
SP-NOPBLK16.....	92	SP-SAIV-A.....	81	SP-W60F2B2.....	86	SUNI3BD.....	12
SP-NOPBLK18.....	92	SP-SAIV-P.....	81	SP-W60F2B3.....	86	SUNI4TAD.....	12
SP-NOPVIO16.....	92	SP-SGNF1.....	82	SP-W60F3.....	86	SUNI4TBD.....	12
SP-NOPVIO18.....	92	SP-SGNF2.....	82	SP-W60F3B1.....	86	SUNI4XAD.....	13
SP-NP14.....	92	SP-SGNF3.....	82	SP-W60F3B2.....	86	SUNI4XBD.....	13
SP-NP18.....	92	SP-SGNF4.....	82	SP-W60F3B3.....	86	SV1ML.....	44
SP-NPBAR.....	92	SP-W45B1.....	83	SP-W60F4.....	86	SV1MLB.....	44
SP-NPFIL.....	92	SP-W45B2.....	83	SP-W60F5.....	86	SV2ML.....	44
SP-NRED16.....	92	SP-W45F1.....	83	SP-W60F5B3.....	86	SV2MLB.....	44
SP-NRED18.....	92	SP-W45F1B1.....	83	SP-W83F1B1.....	87	SV4ML.....	44
SP-NVIO16.....	92	SP-W45F1B2.....	83	SP-W83F2B1.....	87	SV4MLB.....	44
SP-NVIO18.....	92	SP-W45F2.....	83	SP-W83F3B1.....	87	SV-8-425.....	46
SP-NWHI316.....	92	SP-W45F2B1.....	83	SP-W90B1.....	88	SV-13-425.....	46
SP-S45F1.....	81	SP-W45F2B2.....	83	SP-W90B2.....	88	SV-13-425-P.....	46
SP-S45F1-G.....	81	SP-W45F3.....	83	SP-W90B3.....	88	SV-15-425.....	46
SP-S45F1-L.....	81	SP-W45F3B1.....	83	SP-W90B4.....	88	SV-15-425-P.....	46
SP-S45F1P141.....	82	SP-W45F4.....	83	SP-W90B5.....	88	SV-18-400.....	46
SP-S45F1-R.....	81	SP-W45F4B1.....	83	SP-W90F1.....	88	SV-18-400-P.....	46
SP-S45F1-V.....	81	SP-W50F1.....	84	SP-W90F2.....	88	SV-20-400.....	46
SP-S45F1-Y.....	81	SP-W50F1B1.....	84	SP-W90F2B1.....	88	SV-20-400-P.....	46
SP-S45F2.....	81	SP-W50F1B2.....	84	SP-W90F2B2.....	88	SV-24-400.....	46
SP-S45F2-G.....	81	SP-W50F1B3.....	84	SP-W90F2B3.....	88	SV-24-400-P.....	46
SP-S45F2-L.....	81	SP-W50F2.....	84	SP-W90F2B4.....	88	SV-EPA.....	46
SP-S45F2-R.....	81	SP-W50F2B1.....	84	SP-W90F3.....	88	SV-EPA-CAP.....	46
SP-S45F2-V.....	81	SP-W50F2B1-L.....	84	SP-W90F3B1.....	88	SV-EPA-SEPTA.....	46
SP-S45F2-Y.....	81	SP-W50F2B2.....	84	SP-W90F3B2.....	88	SW-B-1GS4.....	73
SP-S45F3.....	81	SP-W50F2B3.....	84	SP-W90F3B3.....	88	SW-B-1GS4-A.....	73
SP-S45F3-G.....	81	SP-W50F3.....	84	SP-W90F3B4.....	88	SW-B-41S2.....	73
SP-S45F3-L.....	81	SP-W50F3B1.....	84	SP-W90F4.....	88	SW-B-41S2-A.....	73
SP-S45F3-R.....	81	SP-W50F3B2.....	84	SP-W90F5.....	88	SW-B-43S4.....	73
SP-S45F3-V.....	81	SP-W50F3B3.....	84	SP-W90F6.....	88	SW-B-43S4-A.....	73
SP-S45F3-Y.....	81	SP-W50F4.....	84	SP-W90F6B2.....	88	SW-B-100-1-1.....	71
SP-S45F4.....	81	SP-W50F5.....	84	SRC300-B.....	34	SW-B-100-1-2.....	71
SP-S45F4-G.....	81	SP-W53F1B1.....	87	SRC300-BN.....	33	SW-B-100-3.....	71
SP-S45F4-L.....	81	SP-W53F2B1.....	87	SRC300-GN.....	33	SW-B-100-6.....	71
SP-S45F4-R.....	81	SP-W53F3.....	87	SRC300-RN.....	33	SW-B-100-6BT.....	71
SP-S45F4-V.....	81	SP-W53F3B1.....	87	SRC300-T.....	34	SW-B-100-C.....	71
SP-S45F4-Y.....	81	SP-W55B3.....	85	SRC300-TN.....	33	SW-B-100-P.....	71
SP-S45F5.....	81	SP-W55F1.....	85	SRC300-YN.....	33	SW-B-100-R-2.....	71
SP-S45F5-G.....	81	SP-W55F1B1.....	85	SRC301-B.....	33	SW-B-102-1.....	71
SP-S45F5-R.....	81	SP-W55F1B2.....	85	SRC301-G.....	33	SW-B-103-1.....	71
SP-S45F5-V.....	81	SP-W55F1B2-L.....	85	SRC301-R.....	33	SW-B-104-1.....	71
SP-S45F5-Y.....	81	SP-W55F1B3.....	85	SRC301-T.....	33	SW-B-200-1-1.....	71
SP-S45F6.....	81	SP-W55F1B3-L.....	85	SRC301-Y.....	33	SW-B-200-1-2.....	71

Part Number Index

SW-B-200-1-4.....	71	SW-SS-203-1	72	TSP-025375	6	TSP-320450-P-10.....	8
SW-B-200-3.....	71	SW-SS-204-1	72	TSP-025375-D-10	8	TSP-400794.....	7
SW-B-200-6.....	71	SW-SS-400-1-2	72	TSP-025375-M-10	9	TSP-450670	7
SW-B-200-6-1.....	71	SW-SS-400-1-4	72	TSP-025375-P-10.....	8	TSP-500794.....	7
SW-B-200-6BT.....	71	SW-SS-400-3	72	TSP-030150	6	TSP-530660	6
SW-B-200-7-2.....	71	SW-SS-400-6	72	TSP-030375	6	TSP-530660-D-10	8
SW-B-200-7-4.....	71	SW-SS-400-6-1	72	TSP-040105	6	TSP-530660-M-10	9
SW-B-200-C	71	SW-SS-400-6-2	72	TSP-040150	6	TSP-530660-P-10.....	8
SW-B-200-P.....	71	SW-SS-400-6BT	72	TSP-040375	6	TSP-530700	6
SW-B-200-R-2.....	71	SW-SS-400-7-2	72	TSP-050150	6	TSP-530700-D-10	8
SW-B-202-1	71	SW-SS-400-7-4	72	TSP-050192	6	TSP-530700-M-10	9
SW-B-203-1	71	SW-SS-400-C	72	TSP-050375	6	TSP-530700-P-10.....	8
SW-B-204-1	71	SW-SS-400-P	72	TSP-050375-D-10	8	TSP-700850	6
SW-B-400-1-2.....	71	SW-SS-400-R-2	72	TSP-050375-M-10	9	TSU-050375	7
SW-B-400-1-4.....	71	SW-SS-402-1	72	TSP-050375-P-10.....	8	TSU-075375	7
SW-B-400-3.....	71	SW-SS-403-1	72	TSP-050794.....	7	TSU-100375	7
SW-B-400-6.....	71	SW-SS-404-1	72	TSP-075150	6	UNIAD	11
SW-B-400-6-1.....	71	SW-SS-OGS2	73	TSP-075200	6	UNIBD	11
SW-B-400-6-2.....	71	SW-SS-OGS2-A.....	73	TSP-075375	6	V1400	23
SW-B-400-6BT.....	71	T1400.....	23	TSP-075375-D-10	8	V1414	23
SW-B-400-7-2.....	71	T1414.....	23	TSP-075375-M-10	9	V1416	23
SW-B-400-7-4.....	71	T1416.....	23	TSP-075375-P-10.....	8	V1418	23
SW-B-400-C	71	T1418.....	23	TSP-075794.....	7	V1600	23
SW-B-400-P.....	71	T1600.....	23	TSP-100170	6	V1603	23
SW-B-400-R-2.....	71	T1603.....	23	TSP-100170-D-10	8	V1604	23
SW-B-402-1	71	T1604.....	23	TSP-100170-M-10	9	V1604-HP	23
SW-B-403-1	71	T1605.....	23	TSP-100200	6	V1605	23
SW-B-404-1	71	T1608.....	23	TSP-100200-D-10	8	V1605-HP	23
SW-B-OGS2	73	T1610.....	23	TSP-100200-M-10	9	V1608	23
SW-B-OGS2-A	73	T1612.....	23	TSP-100245	6	V1608-HP	23
SW-SS-1GS4.....	73	T1616.....	23	TSP-100245-D-10	8	V1610	23
SW-SS-1GS4-A	73	T1800.....	23	TSP-100245-M-10	9	V1612	23
SW-SS-41GS2	73	T1804.....	23	TSP-100375	6	V1616	23
SW-SS-41GS2-A	73	T1805.....	23	TSP-100375-D-10	8	V1624	23
SW-SS-43GS4	73	T1808.....	23	TSP-100375-M-10	9	V1625	23
SW-SS-43GS4-A	73	T1816.....	23	TSP-100375-P-10.....	8	V1800	23
SW-SS-100-1-1	72	T1818.....	23	TSP-100794	7	V1804	23
SW-SS-100-1-2	72	T1825.....	23	TSP-150375	6	V1805	23
SW-SS-100-3	72	T14316.....	23	TSP-150375-D-10	8	V1808	23
SW-SS-100-6	72	T316316.....	23	TSP-150375-M-10	9	V1816	23
SW-SS-100-6BT	72	TPXCV1102	32	TSP-150665	7	V1818	23
SW-SS-100-C	72	TPXCV1103K.....	29, 32	TSP-180350	6	V1825	23
SW-SS-100-P	72	TPXS0903K.....	37	TSP-180350-D-10	8	V1828	23
SW-SS-100-R-2	72	TSH-050375	7	TSP-180350-M-10	9	VR12	28, 52
SW-SS-102-1	72	TSH-075375	7	TSP-200350	6	VR15	40, 52
SW-SS-103-1	72	TSH-100375	7	TSP-200350-D-10	8	WFP02	61
SW-SS-104-1	72	TSP000.2375NC	6	TSP-200350-M-10	9	WFP045	61
SW-SS-200-1-1	72	TSP000.6375NC	6	TSP-200665	7	WFPNC02	61
SW-SS-200-1-2	72	TSP001.0375NC	6	TSP-200794	7	WFPNC45	61
SW-SS-200-1-4	72	TSP-002150.....	6	TSP-250350	6	WFPNL02.....	61
SW-SS-200-3	72	TSP-005150.....	6	TSP-250350-D-10	8	WFPNL45.....	61
SW-SS-200-6	72	TSP-005375.....	6	TSP-250350-M-10	9	WFPNP02	61
SW-SS-200-6-1	72	TSP-010150.....	6	TSP-250350-P-10.....	8	WFPNP45	61
SW-SS-200-6BT	72	TSP-010375.....	6	TSP-250665	7	WFPNP02	61
SW-SS-200-7-2	72	TSP-015150.....	6	TSP-250794	7	WFPNP45	61
SW-SS-200-7-4	72	TSP-015375.....	6	TSP-300665	7	WFPNP02	61
SW-SS-200-C	72	TSP-020090.....	6	TSP-300794	7	WFPNP45	61
SW-SS-200-P	72	TSP-020150.....	6	TSP-320450	6	WFPNPV02.....	61
SW-SS-200-R-2	72	TSP-020375.....	6	TSP-320450-D-10	8	WFPNPV45.....	61
SW-SS-202-1	72	TSP-025150.....	6	TSP-320450-M-10	9	WFPNP02	61

Part Number Index

WFPRC45 61

WWP-050375..... 7

WWP-075375..... 7

WWP-100375..... 7

Take advantage of our profound expertise in chromatography

Online Shop



www.bgb-shop.com

Find us on Facebook, LinkedIn and Instagram



www.facebook.com/bgbanalytik



www.linkedin.com/company/bgbanalytik



www.instagram.com/bgb_analytik

Also available at BGB Analytik

GC Columns



More than 10.000 GC columns available in our web shop from different well known suppliers. Please ask our experts for professional support.

For more information visit www.bgb-shop.com/gc-columns.

HPLC Columns



More than 40.000 HPLC columns available in our web shop from different well known suppliers. Please ask our experts for professional support.

For more information visit www.bgb-shop.com/hplc-columns



Prices may change without notice and do not include VAT.

DR-BGB-2406

BGB GC|LC
MS|CE

www.bgb-shop.com

Germany: BGB Analytik Vertrieb GmbH • Mühlestraße 1 • 79539 Lörrach • Phone +49 7621 5884270 • Fax +49 7621 5884289 • sales.de@bgb-analytik.com
Benelux: BGB Analytik Benelux B.V. • Drielandendreef 42-44 • 3845 CA Harderwijk • Phone +31 341 700270 • Fax +31 341 700271 • sales.benelux@bgb-analytik.com
France: BGB Analytik France S.A.S. • 81 Vie de l'Etraz • 01630 St. Jean de Gonville • Phone +33 450 488567 • Fax +33 450 562378 • sales.fr@bgb-analytik.com
Switzerland: BGB Analytik AG • Rohrmattstrasse 4 • 4461 Böckten • Phone +41 61 991 00 46 • Fax +41 61 991 00 25 • sales@bgb-analytik.com
Turkey: BGB Analytik Laboratuvar Malzemeleri Ticaret LTD.ŞTİ • Starport Residence • Yenişehir Mah. Osmanlı Bulvarı. • Sümbül Sok. No:10, Daire: 193 • 34912 Kurtköy, Pendik, İstanbul • Phone +90 2169092048 • sales.tr@bgb-analytik.com
USA: BGB Analytik USA LLC • 8407 F Richmond Hwy • Alexandria, VA 22309 • Phone 1-703-780-1500 • Fax 1-703-991-9131 • sales.usa@bgb-analytik.com